




Diagonal Circuits

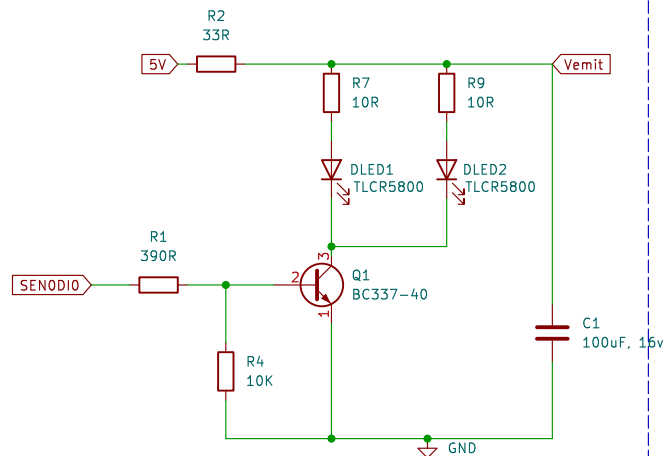


Detectors

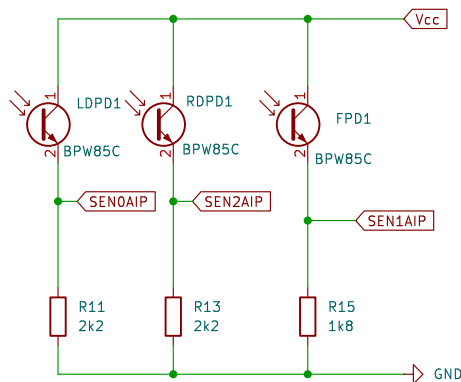


Board Connector to Mezzanine

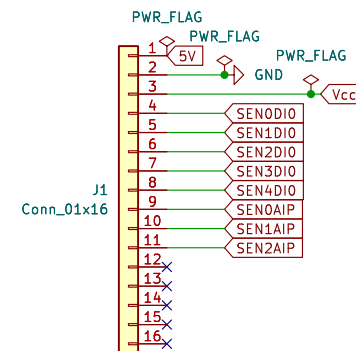


Mounting Holes




Power Smoothing



Front Circuit

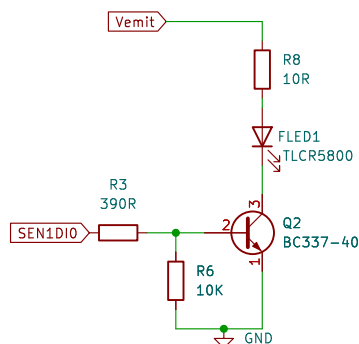

Indicator LED's

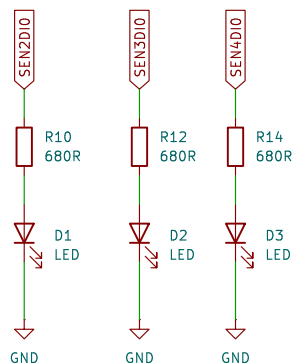

NOTES:

- SEN0DIO – "Diag LED" on PCB. Set High to turn on the diagonal sensor LED's
- SEN1DIO – "Frnt LED" on PCB. Set High to turn on the front sensor LED
- SEN2DIO – "Left LED" on PCB. Set High to turn on the left Indicator LED. D1
- SEN3DIO – "Mid LED" on PCB. Set High to turn on the middle Indicator LED. D2
- SEN4DIO – "Right LED" on PCB. Set High to turn on the right Indicator LED. D3
- SEN0AIP – "Left ADC" on PCB. Read via ADC pin to get value from the left photodiode. LDPD1
- SEN1AIP – "Front ADC" on PCB. Read via ADC pin to get value from the front photodiode. FPD1
- SEN2AIP – "Right ADC" on PCB. Read via ADC pin to get value from the left photodiode. RDPD1

Sheet: /
File: UKMARSBOT_RP2040Wall-Sensor-Basic.kicad_sch

Title: UKMARS Basic Sensor Board for Gemini

Size: A4 Date: 2024-12-19

KiCad E.D.A. 8.0.8

Rev: 2

Id: 1/1