Rocket Flight Simulator and Mission Analysis Tool

Mission Report

Vehicle specifications are simplified and adapted for educational simulation. The simulator does not reproduce real-world launch performance.

Mission Summary

This report summarizes a one-dimensional vertical launch using variable thrust, propellant mass depletion, altitude-dependent atmospheric density, and velocity-opposed aerodynamic drag.

Attribute	Value
Selected Launch Vehicle	Custom Rocket

Vehicle Specifications

Custom Rocket mode is active. Vehicle-level catalog data was not selected.

Vehicle Description

User-defined custom vehicle configuration.

Rocket Parameters

Parameter	Value
Dry Mass	3.000
Fuel Mass	2.000
Thrust	300.000
Burn Time	8.000
Drag Coefficient	0.450
Cross Sectional Area	0.020

Atmospheric Model

Density follows a simplified International Standard Atmosphere: 1.225 kg/m^3 at sea level, cooling through the troposphere, then an isothermal lower-stratosphere approximation above 11 km.

Flight Phase Timeline

Phase	Start (s)	End (s)	Duration (s)

PRE-LAUNCH	0.000	0.300	0.300
LIFTOFF	0.400	0.400	0.000
POWERED_ASCENT	0.500	7.900	7.400
COASTING	8.000	16.700	8.700
APOGEE	16.800	16.800	0.000
DESCENT	16.900	41.400	24.500
LANDING	41.500	41.500	0.000


Performance Metrics

Metric	Value
Maximum Altitude M	1474.824
Maximum Velocity Mps	193.398
Maximum Acceleration Mps2	53.940
Burnout Time S	7.900
Apogee Time S	16.700
Total Flight Duration S	41.500
Landing Velocity Mps	-73.791
Flight Duration S	41.500


Engineering Conclusions

The upgraded simulation captures the dominant first-order effects for vertical flight analysis: decreasing density reduces drag at altitude, thrust tail-off shapes burnout acceleration, and mass depletion improves the predicted acceleration history.


Altitude Plot

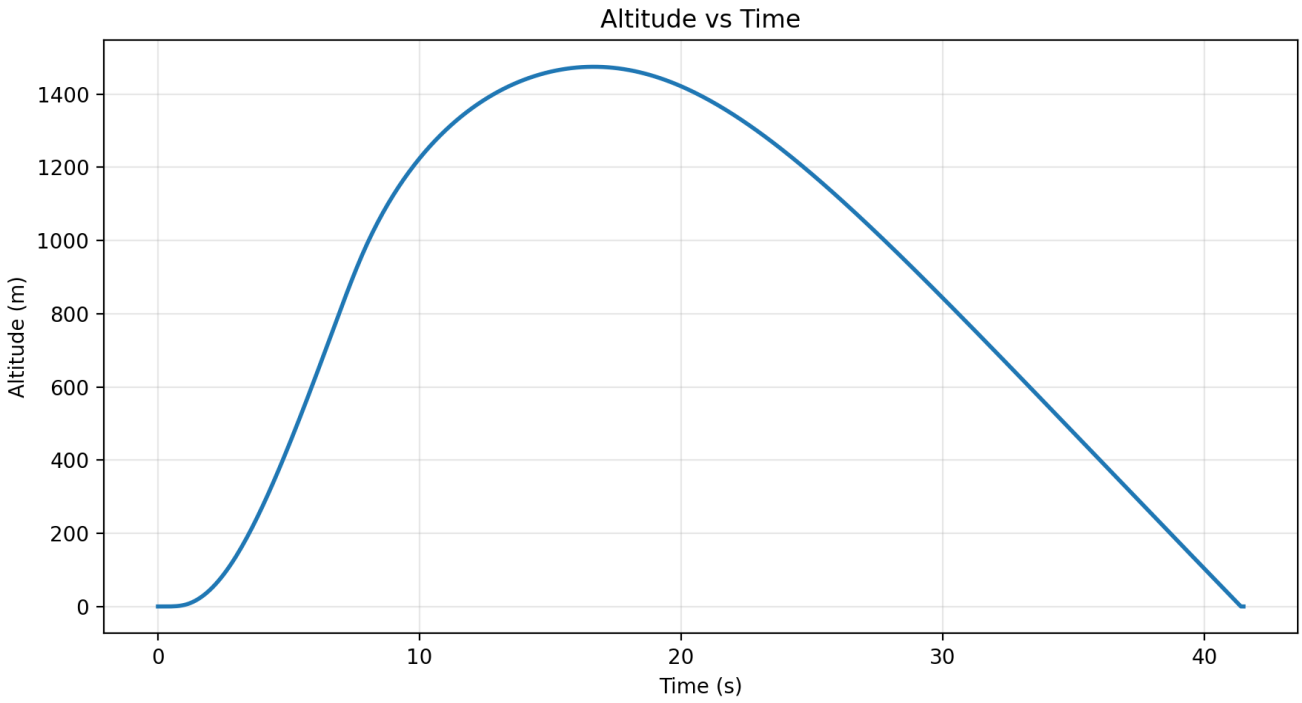


Velocity Plot

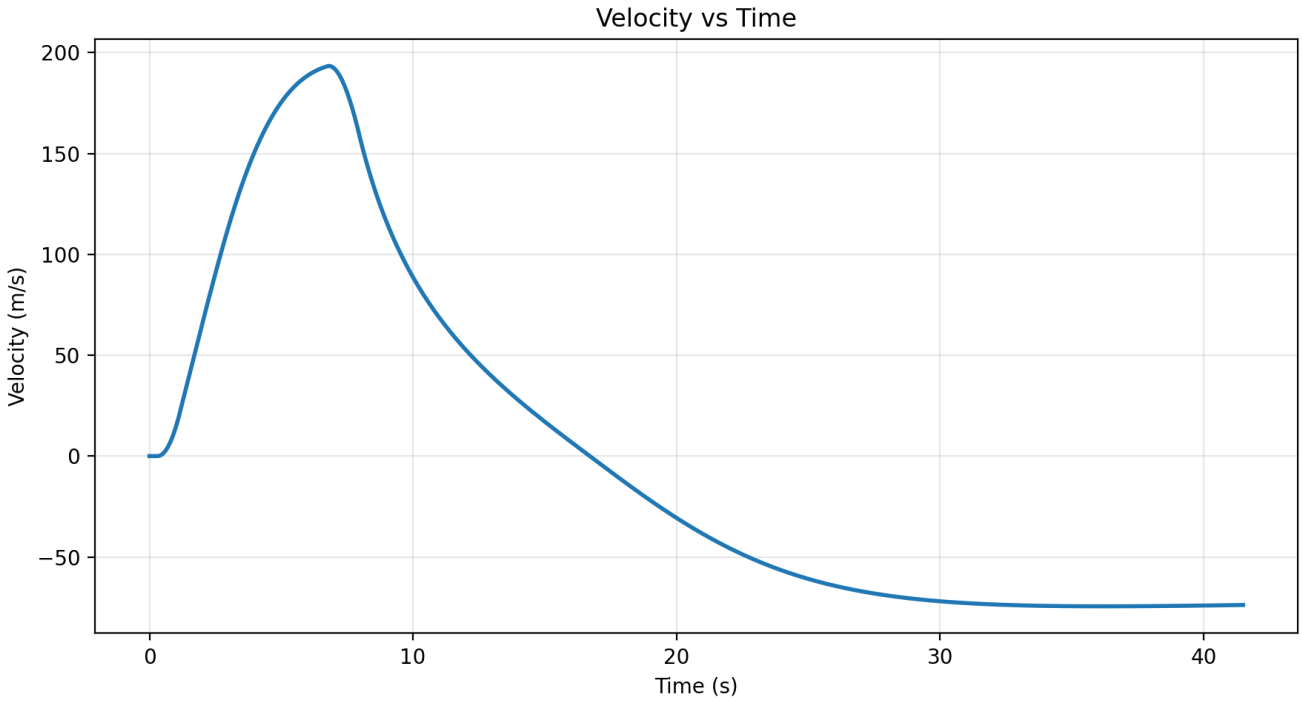


Acceleration Plot

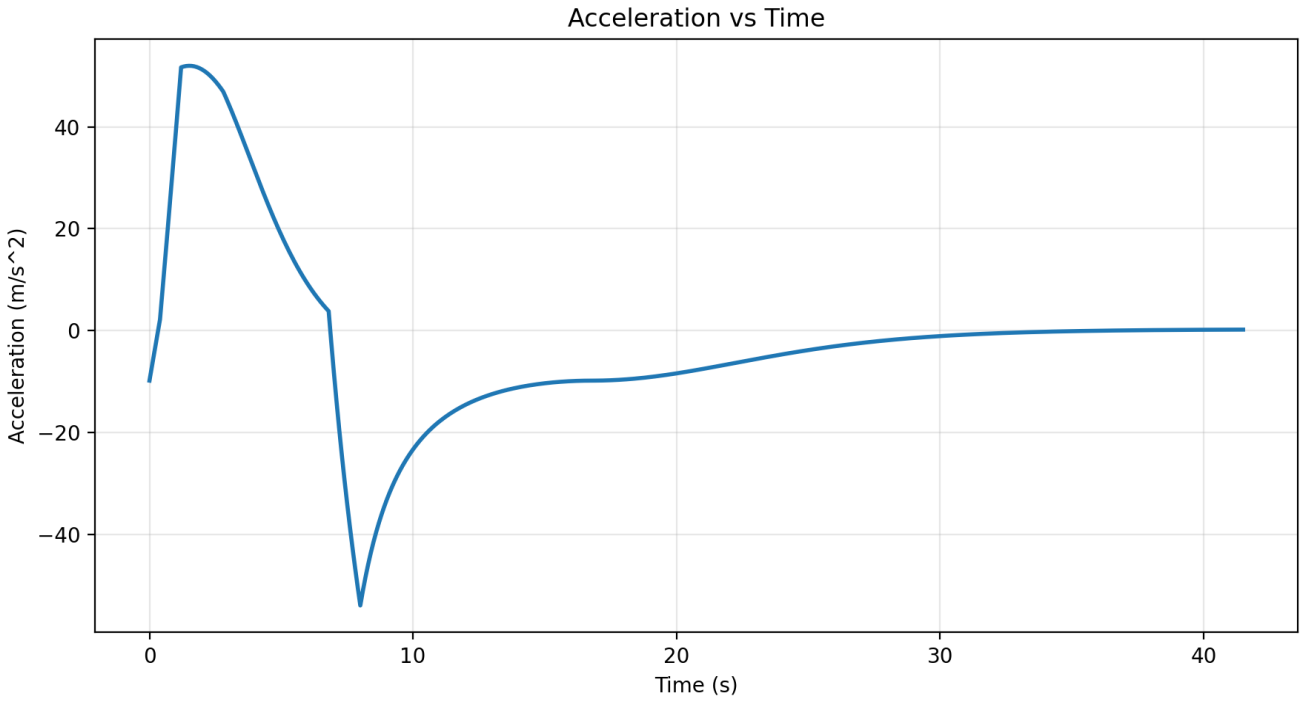

Mass Plot

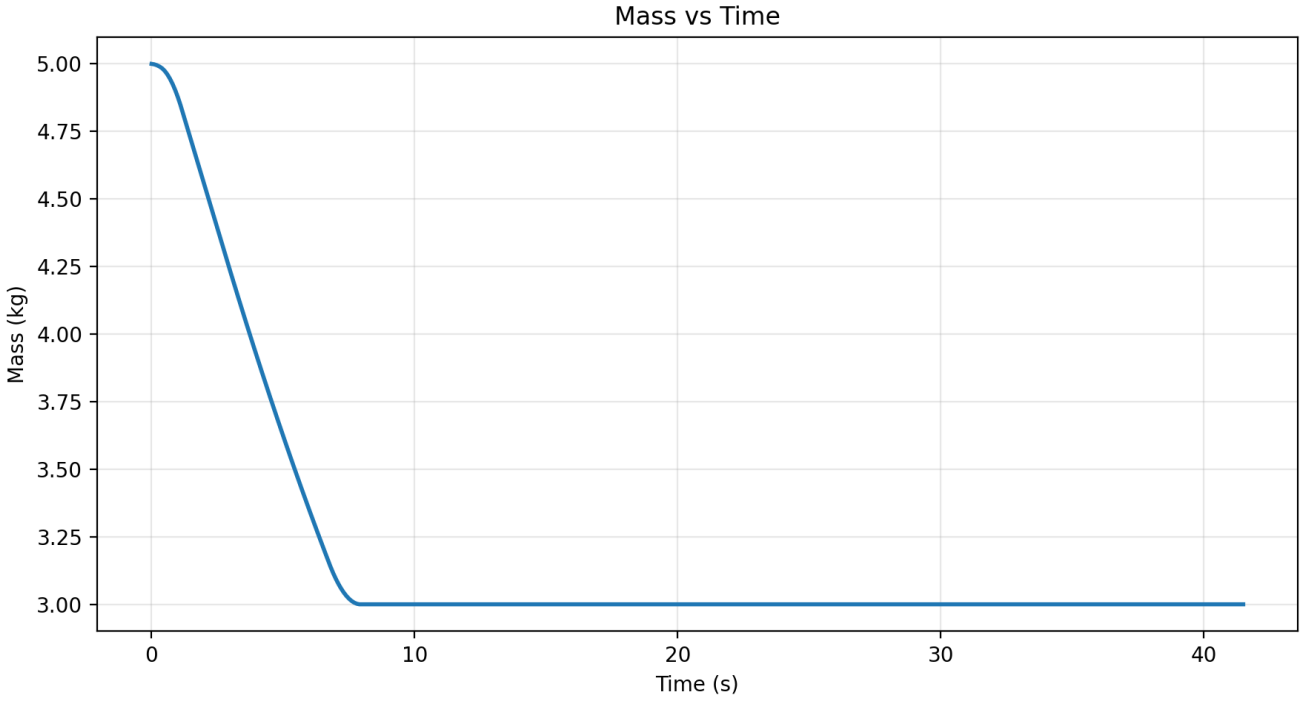

Thrust Plot

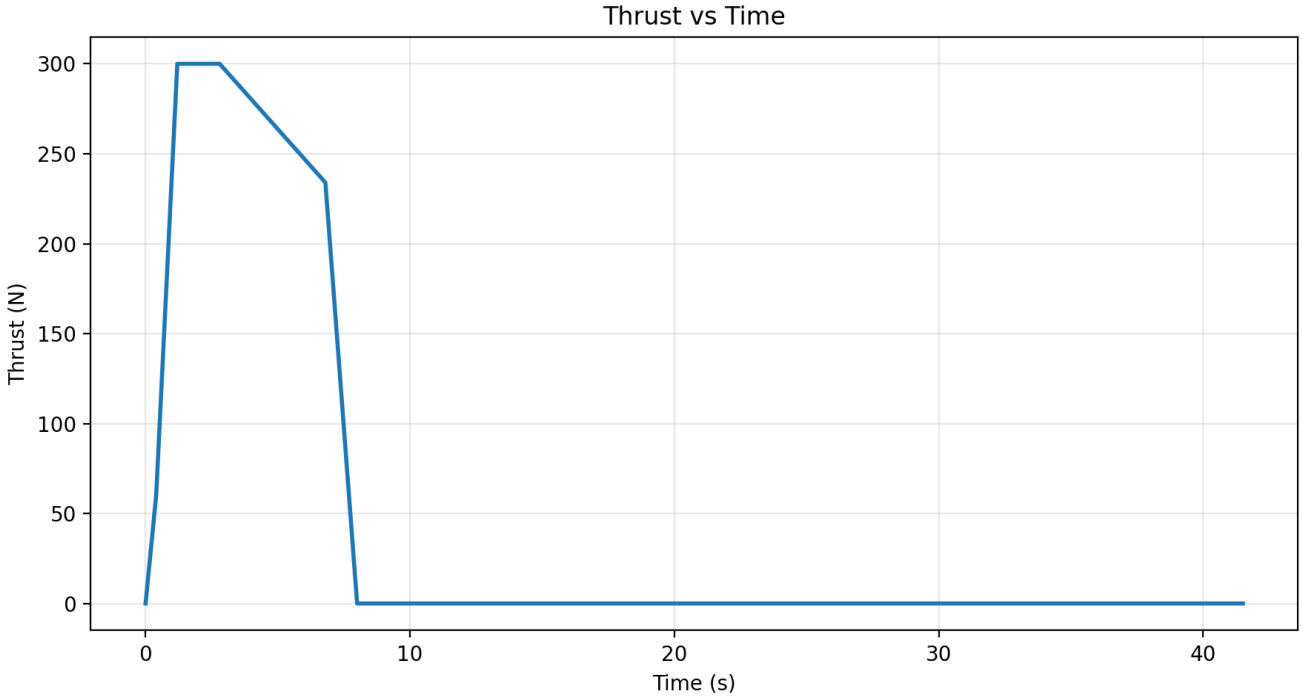
Thrust vs Time
Thrust (N)
300
250
200
150
100
50
0
0
10
20
30
40
Time (s)