CONFIDENTIAL / INTERNAL USE ONLY



CODY / VIBEWARE

Navigation Atlas

Find your way through Cody

DRAFT / 12 October 2026

Copyright (c) 2026 Umberto Giacobbi

umbertogiacobbi.biz

Contents

Main sections / click a row to jump to its page

Overview and first setup 3

Connect Codex 7

Home, information and Setup 9

Questions and reply delivery 11

Work status 13

Voice journey 14

Battery, standby and recovery 15

Debug views 17

Revision register 18

Security 39

This edition / revision record 40

Page numbers refer to this PDF. Earlier page references in historical notes retain their original edition numbering.

Cody / Navigation atlas

A continuous journey, with current routes and clearly marked future voice input.

04 / Welcome



NOTES

16 / Home



NOTES

26 / Codex needs you



NOTES

First setup -> connected companion -> an explicit question. Screen IDs identify routes; page numbers identify this printout.

Cyan Cody is the common visual reference. Schematics are editorial illustrations, not device captures. Current contracts: docs/cody/navigation.md and runtime.md. Historical decisions are retained only in the final revision register.

CODY / NAVIGATION ATLAS

Boot selects the right journey

Branding precedes screens 01-03; persisted state and real network observations select the route.

READ SAVED WI-FI / IP / PAIRING

LAN + unpaired -> 40 / Yes or No

04-09 / First setup




NOTES

42 / No connection



NOTES

14 / Looking for PC

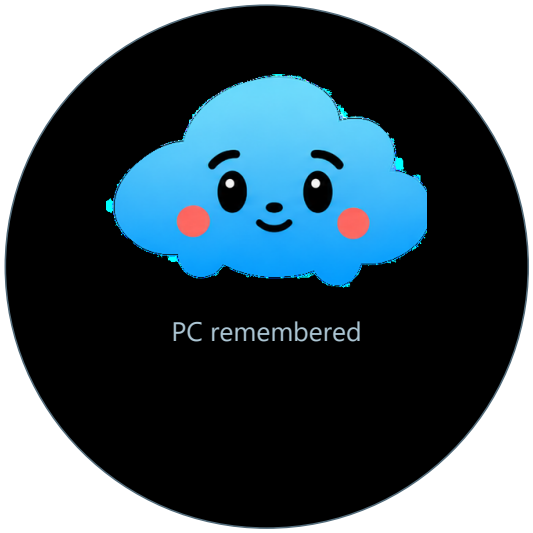

NOTES

Absent Wi-Fi -> 04; association/IP unavailable -> 42; LAN valid and unpaired -> 40; retained pairing -> 14.


VibeWare floppy animation and Cody identity precede route selection. Storage errors remain visible errors; they are never treated as missing settings. LAN access and Internet access are separate observations.

CODY / NAVIGATION ATLAS

Wi-Fi setup / install, then pair

04 -> 05 -> 06 -> 07 -> 09. Installation and provisioning use different QR payloads.

05 / Let's pair

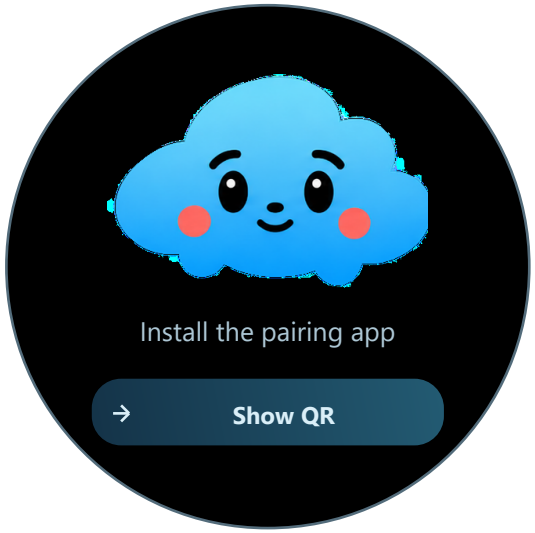


NOTES

06 / Install app



NOTES

07 / Scan to pair

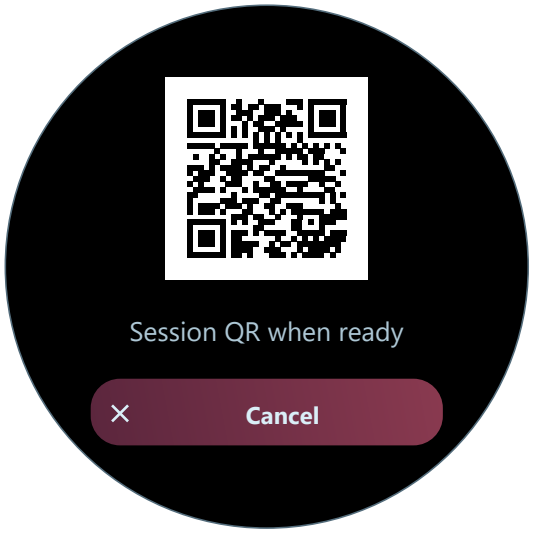

NOTES

Show QR opens 06 without starting radios. Pair Cody starts BLE; only ReadyToScan reveals the session QR in 07.

Credentials received remove the session QR. Cancel waits for confirmed cleanup before returning to 06. Retry resumes the failed owner stage; it never silently restarts another attempt. Historical 06-bis is now a state of screen 07.

CODY / NAVIGATION ATLAS

Wi-Fi handoff and personalization

Successful connection and persistence precede confirmation. Debug handoff has its own fresh tap.

09 / You're online



NOTES

10 / Make it yours



NOTES

11 / Cody's look



NOTES

09 Continue -> 10 Next -> 36 Continue -> 11; Done returns to its caller and evaluates the saved Codex link.

Debug uses 39 before 09; Release proceeds directly. Screen 09 admits Continue only with valid current Wi-Fi/IP. Four preference rows and Desk/Away usage preserve real storage results. First setup requires an explicit skin selection; reusable settings retain their caller.

CODY / NAVIGATION ATLAS

Connect Codex / a separate decision

40 -> 12 -> 13 -> 14 -> 15. Local pairing is independent of the followed chat.

40 / Connect Codex?



No -> 16 / Home

NOTES

12 / Pair Codex



NOTES

13 / You're all set



NOTES

Yes -> code preparation -> confirmed handshake -> Let's go -> immediate retained-PC search. No keeps the local companion.

Use all six characters only on the intended device. The preparation estimate is not measured progress. Backend pairing lasts five minutes; code-screen inactivity is 180 seconds. All set requires two-sided persisted confirmation, not merely a packet ACK.

CODY / NAVIGATION ATLAS

Find the PC, then follow real work

14 -> 15 -> activity variants 17-20. Pairing, presence and actual chat activity remain distinct.

14 / Looking for PC



NOTES

15 / Connected



NOTES

17-20 / Working with you



NOTES

Authenticated current presence -> Connected. A genuine followed prompt -> activity; response ready and chat ended are distinct.

The latest authorized UserPromptSubmit establishes exact chat and turn identities. Background events and opening a tab do not select a chat. Broker restart requires another real prompt. Project names are labels, and unmeasured metrics remain unavailable.

CODY / NAVIGATION ATLAS

Home and companion information

A passive tap cycles the technical panels; a deliberate shake returns directly to Home.

TECH / Activity




NOTES

TECH / Model & Context



NOTES

TECH / Session & Link

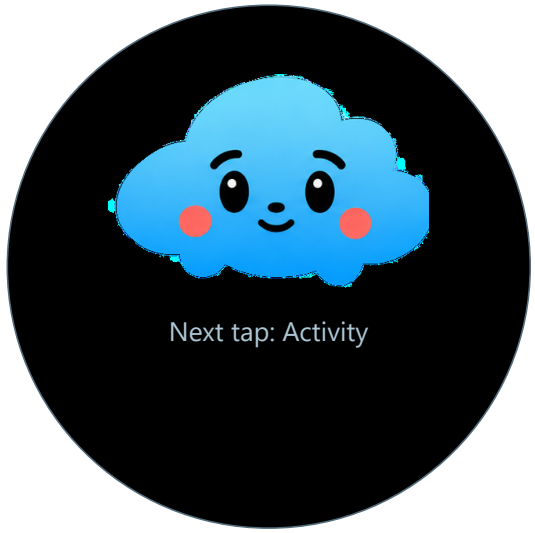

NOTES

Home -> Activity -> Model & Context -> Session & Link -> Activity. Shake -> Home. Technical panels have no Back.


Short passive taps are distinct from the 1.5-second stationary hold that opens Setup. Idle scenes compose on the current route; they do not create new screens or prolong standby. Canonical snapshots are the only runtime measurement source.

CODY / NAVIGATION ATLAS

Reopen Setup without replacing the PC

Hold visible Cody still for 1.5 seconds, then release before selecting an action.

41 / Setup

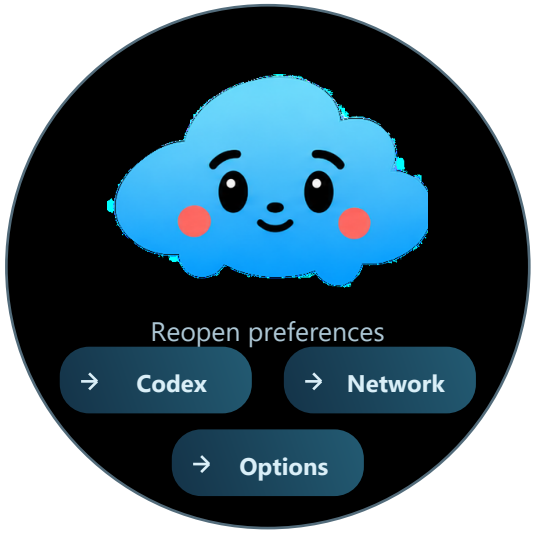


NOTES

RETAINED / PC remembered



NOTES

FORGET / Forget pairing?

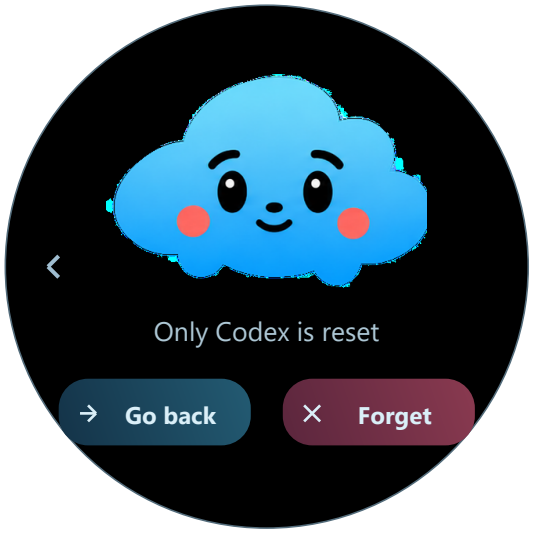

NOTES

Setup -> Connect Codex, Network setup or Options. Keep link reuses the saved PC; Pair again explicitly authorizes replacement.

Forget needs a second confirmation and removes only Cody's CCP records. Wi-Fi, preferences and logs remain; the PC record is not remotely revoked. Pending candidates and storage errors keep their real identity and cause. Back restores the valid caller.

CODY / NAVIGATION ATLAS

Read a question, then choose


26 -> 27 -> review 27. A choice is reversible until Send; native approvals stay on the PC.

26 / Codex needs you



NOTES

27 / Choose a reply

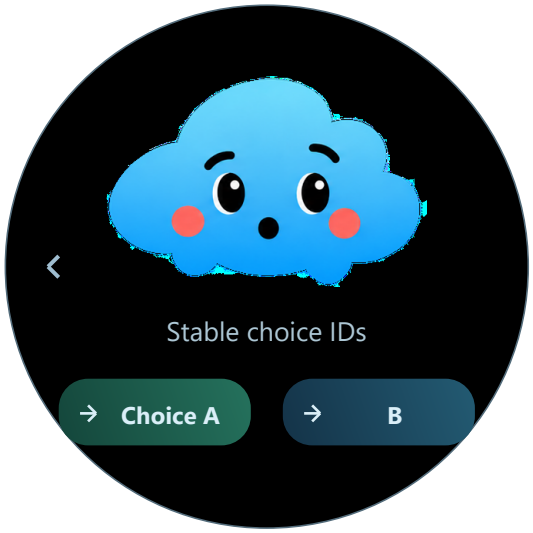

NOTES

27 / Review choice



NOTES

Open -> two or three reply cards -> review -> Send. Back from review returns to choices; Back from choices returns to 26.

Two actions use side-by-side cards; three add a centered card below. One action uses an icon-left capsule. Controls reveal together after narration, without teletype captions. An open question keeps priority over routine updates and battery notices.

CODY / NAVIGATION ATLAS

Delivery, offline and real outcomes


Send -> received -> recipient delivered -> 31. A received ACK is not final delivery.

WAIT / Sending reply



NOTES

31 / Reply sent

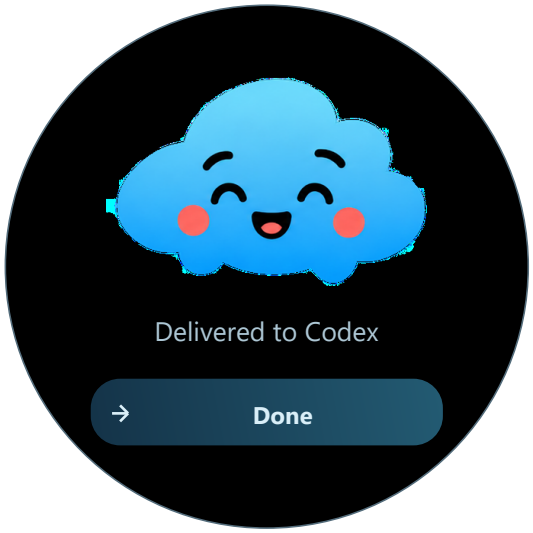

NOTES

32 / Offline



NOTES

Recipient ACK -> Reply sent -> previous context. Before Send: Request expired. After Send: Reply unconfirmed / Check on your PC.

The 180-second deadline includes delivery acknowledgement. Reconnecting does not renew it. Cancel, expiry and offline never choose an answer. Terminal states cannot reopen on late ACKs. A notice has no choices and produces no reply.

CODY / NAVIGATION ATLAS

PR status belongs to ordinary activity

21-24 are information variants of the followed work; no separate PR-management application.

21 / PR pending




NOTES

22 / Checks running



NOTES

23 / Checks failed

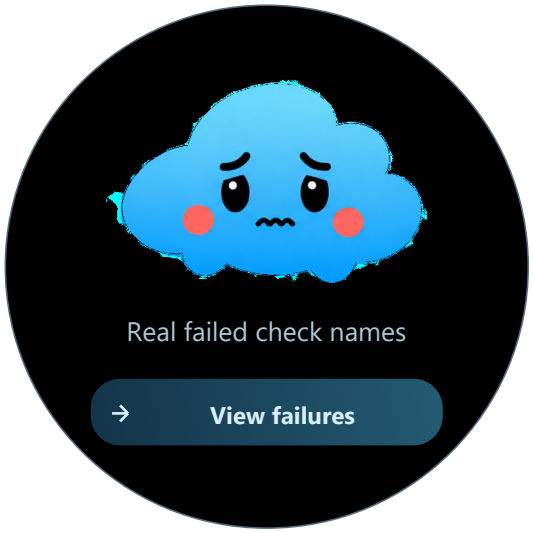

NOTES

Active work -> PR pending -> checks running -> passed or failed. View failures -> 24; Back -> 23. Screen 25 is retired.


The 04 October A03 decision limits device interaction to status and failure names. Counts require a complete current list for the same head. No merge, approve, close, rerun or View log route. This page explains navigation, rather than adding another work mode.

CODY / NAVIGATION ATLAS

Voice input / retained planned journey


28-30 are planned, unimplemented audio routes. The Wi-Fi input discussion remains visible.

28 / Listening

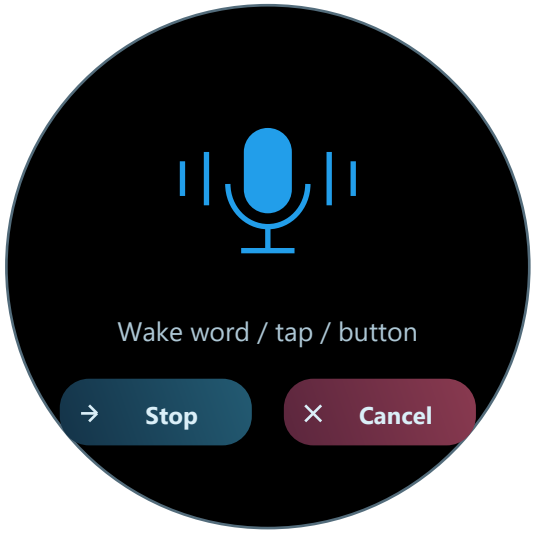

NOTES

29 / Sending audio

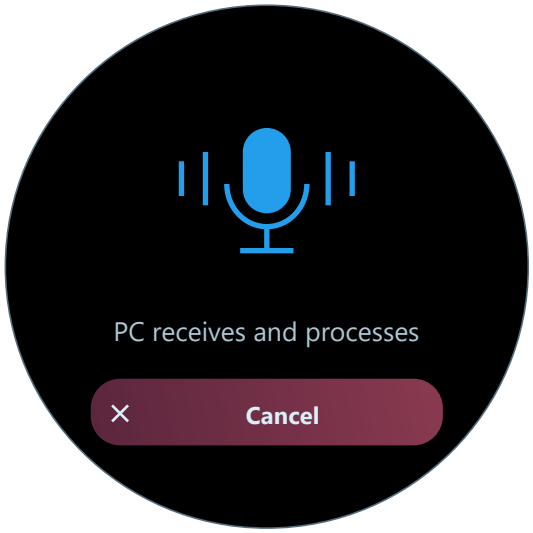

NOTES

30 / Review transcript



NOTES

Trigger -> dedicated listening view -> one-way audio to PC -> processing -> review. Question replies retain recipient delivery rules.


Planned architecture: suspend character rendering, show a small precomputed listening animation, stream authenticated audio over a dedicated Wi-Fi channel and retain up to ten seconds of unacknowledged PCM in PSRAM. Codex native audio compatibility remains to be verified; no audio implementation is claimed.

CODY / NAVIGATION ATLAS

Battery notices at a quiet moment

33 / 34 are expressive notices, not navigation destinations or persistent numeric banners.

33 / Battery low

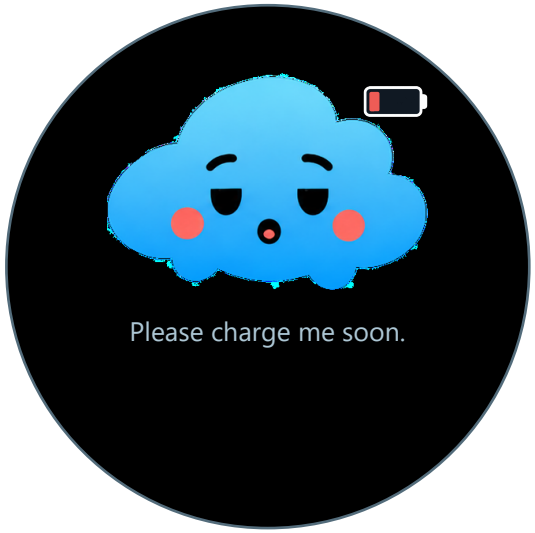


NOTES

34 / Charging



NOTES

34 / Fully charged

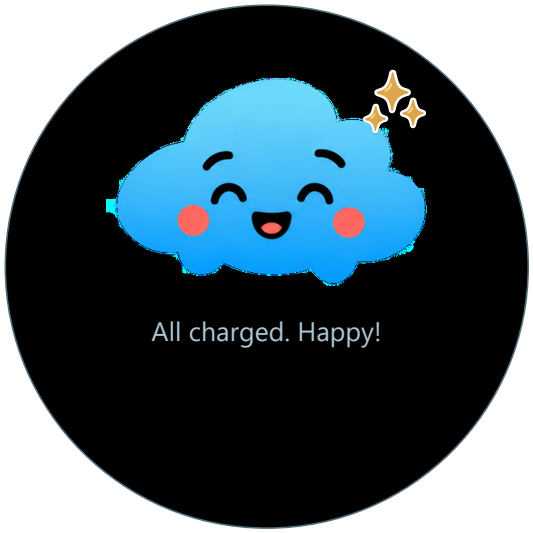

NOTES

Queue low at 20%, critical at 10%, charging-start and full events. Present only when Home is eligible; retain the current route.

After ten quiet Home seconds, show a four-second notice without extending standby. Charging entry and full charge notify once; continuous charging stays silent. Low reminders repeat after five minutes at 20%, one minute at 10%. Use manga symbols without numeric captions; never interrupt a question or setup.

CODY / NAVIGATION ATLAS

Standby and recovery keep their owner

35A / 35B and 32 preserve saved context. Sleep is never an automatic reply or reset.

35A / Going to sleep



NOTES

35B / Sleeping



NOTES

32 / PC unavailable



NOTES

Ten eligible quiet Home seconds admit a brief notice; the existing standby deadline is unchanged. Wake restores the route.

Paired standby retains Wi-Fi and the existing wake-word owner. Restart retains data; an explicitly confirmed factory reset removes settings, Wi-Fi and pairing while retaining firmware, assets and SD. Acceptance ACK and observed reboot are different evidence.

CODY / NAVIGATION ATLAS

Character debug and preview boundaries

37 / 38 inspect the rig; simulator data is visibly synthetic and never becomes a firmware sample.

37 / Rig view



NOTES

38 / Expression channels



NOTES

16 / Home



NOTES

Development entry -> rig / channels -> composed preview -> return to caller. Breathing and expression are pose updates, not routes.

Energy, drowsiness, alertness and tension describe expressive channels. Canonical acquisition owns sensors; UI and animations do not read hardware directly. Windows audio and device capture have separate scopes. These schematics do not prove physical behavior.

Revision register

Historical dates, original IDs and scope retained. Current illustrated flow precedes this register.

DATE / TYPE	DESCRIPTION / ORIGINAL PAGE AND SCREEN IDS
03 October 2026 **ADDENDUM**	**Network setup / revised route** Affected: Original navigation page 13; original screen IDs retained below. 03 OCT 2026 Network setup / revised route A01 supplements base pages 03 and 12. Insert screen 06-bis; keep all existing IDs. REQUESTED BY Umberto Giacobbi (project owner) AFFECTED BASE PAGES 03 / 12 PRINT ONLY THIS PAGE 13 / keep the existing printout PLANNING / ILLUSTRATIVE DATA WHY App installation and device provisioning use different QR payloads. The route needs a distinct device-QR step. Show QR Pair Cody Credentials received Original diagram labels: Wi-Fi + IP / Failure / Retry Let's pair We'll show a QR code. Scan it to install the pairing app. Show QR 05 Let's pair Pair Cody 06 Install app / no title Scan to pair Scan inside the provisioning app. 06-bis Scan to pair Pairing... Cancel 07 Pairing... Try again Retry 08 Try again You're online. Wi-Fi connected Continue 09 You're online BACK / CANCEL / RETRY 06 Back -> 05 06-bis Back -> 06 07 Cancel -> 06 08 Retry -> 06-bis 09 Continue -> 10 Pair Cody starts BLE provisioning before opening 06-bis. Back, Cancel and recoverable failure close the active session before navigation; cleanup errors remain visible. Retry opens a new attempt. Credentials received advance to 07; confirmed Wi-Fi and IP advance to 09. 06: remove 'Scan to install'. QR previews remain illustrative. This is a requested design update, not firmware validation.

Revision register

Historical dates, original IDs and scope retained. Current illustrated flow precedes this register.

DATE / TYPE	DESCRIPTION / ORIGINAL PAGE AND SCREEN IDS
04 October 2026 **ADDENDUM**	**A02 / Screen 11 selection route** Affected: Original navigation page 14; original screen IDs retained below. 04 OCT 2026 A02 / Screen 11 selection route The same selector can be called from first setup and from future Settings. APPEND-ONLY DESIGN DECISION 10 Make it yours 11 Cody's look 12 / 16 Continue setup 36 Future Settings 11 Cody's look 36 Return to Settings Next Done / continue Back Cody's look Done / Back ROUTE RULE Screen identity 11 stays stable. Only its user-facing title and content change. Selection does not create five routes: all choices remain inside one scrollable screen and preserve the caller for Back/Done. This supplements base navigation page 04.
04 October 2026 **ADDENDUM**	**A03 / Read-only pull-request flow** Affected: Original navigation page 15; original screen IDs retained below. 04 OCT 2026 A03 / Read-only pull-request flow Cody reports verified status and failure names; PR work stays on the PC. PRINT PAGE 15 ONLY APPEND-ONLY DESIGN DECISION 17 Project active 21 PR pending 22 Checks running 23 Checks failed 24 Failed checks PR tracked Checks start One or more fail View failures Back All pass: brief success on 22, then return to 17 DATA RULE Counts and conclusions belong to the exact PR head commit. If the companion cannot provide a complete, current check list, screen 22 says only 'Checks running' and does not invent progress. 25 RETIRED No route opens raw logs on the device; detailed investigation remains on the PC.

Revision register

Historical dates, original IDs and scope retained. Current illustrated flow precedes this register.

DATE / TYPE	DESCRIPTION / ORIGINAL PAGE AND SCREEN IDS
04 October 2026 **ADDENDUM**	**A04 / Pairing-to-personalization route** Affected: Original navigation page 16; original screen IDs retained below. 04 OCT 2026 A04 / Pairing-to-personalization route Persist first boot before success UI; gate screen 12 explicitly and never invent PC connectivity. PRINT PAGE 16 ONLY APPEND-ONLY DESIGN DECISION 07 Pairing save false 39 Pairing debug tap 09 You're online Continue 10 Make it yours Continue 36 Settings DEBUG Release skips 39 SCREENS 04-09 / CONFIG_LUNASHELL_CODY_FORCE_FIRST_BOOT=n Accepts y/n; Cody profile default: n. y replays first setup at each boot, even when cody_firstboot=false; n follows the saved value. The override does not change flash. 11 Cody's look Done 12 Connect Codex Continue 13 You're all set Let's go 14 Looking for PC real session 15 Connected Continue to look Flag y Flag n skips 12 ROUTE RULES Screen 09 uses a 60-second standby override. Wake restores 09 and does not activate Continue. Screens 36 and 11 are reusable personalization routes. Screen 11 has no Back in first setup and cannot finish before an explicit row tap. Screen 15 is admitted only by a real current Codex/PC session state; screen 14 remains pending otherwise. SCREEN 12 / CONFIG_LUNA_SHELL_CODY_ENABLE_CODEX=y Controls Codex connection setup. Explicitly configured y and currently always enabled; n skips 12, from 11 to 13.
05 October 2026 **CHANGE**	**Idle moments without leaving Idle** Affected: Original navigation page 17; original screen IDs retained below. Idle moments without leaving Idle A05 supplements base pages 02, 06, 10 and 11. Screen 16 retains its identity. DESIGN / STATIC SOURCE REVIEW ONLY 16 / Idle Breathing + current base expression 20-40 active seconds / eligible and quiet Random selection Choose one of the other gestures; no immediate repeat IS02 / Yawn Soft eyelids; broad mouth. Silent. IS03 / Whistle Pursed mouth; one optional 300-ms sound. IS04 / Greeting Friendly smile, wink and cheek lift. Silent. 3.2 seconds -> return to the same Idle expression -> 40-second cooldown -> new 20-40-second wait. The automatic clock greeting may stay visible behind these accents. Onboarding Hello 04 remains a separate route.

Revision register

Historical dates, original IDs and scope retained. Current illustrated flow precedes this register.

DATE / TYPE	DESCRIPTION / ORIGINAL PAGE AND SCREEN IDS
05 October 2026 **CHANGE**	**Interrupt promptly and protect real work** Affected: Original navigation page 18; original screen IDs retained below. Interrupt promptly and protect real work Transient gesture policy; no new settings writes and no extension of device inactivity. DESIGN / STATIC SOURCE REVIEW ONLY Original diagram labels: Normal Idle / Allow the three gestures only while the normal Main view is running, with a resting expression and no current / personality symbol or caress. Touch, Sophia or activity Cancel the gesture as soon as the route/model consumes the real interaction. New motion-derived stress, microphone activity or other playback also takes priority. Settings / setup / work Suppress scheduling outside screen 16. Never navigate away from a question, pairing attempt, working state, error, settings or Debug route to show a gesture. Original diagram labels: Pause / Sleep / Wake / Do not admit gestures while paused or during lifecycle transitions. Active-time clocks exclude parked time; no backlog / or catch-up scene is created. Whistle admission Only a completed visible pursed-mouth frame may request sound. Quiet hours, volume zero, disabled sounds, busy audio and cooldown suppress it; do not retry later. Audio ownership The audio owner publishes the actual cue identity and successful PCM level in the canonical snapshot. Cody's own whistle keeps its mouth pursed; unrelated playback interrupts. Source implementation and the Windows visual model were updated. Firmware build, tests, simulator execution and physical appearance/acoustics remain unverified and require separate authorization.
05 October 2026 **ERRATA**	**Errata and corrections** Affected: Original navigation page 19; original screen IDs retained below. Errata and corrections Revision date: 05 October 2026. Previous pages and addenda remain intact. DESIGN / STATIC SOURCE REVIEW ONLY Breathing visibility Clarifies a visible mouth pulse under stress: 35% closing, 16-22% reopening and a 4.5% width pulse. Affects screen 16 / Idle and the Stressed expression. Three idle scenes Adds IS02 Yawn, IS03 Whistle and IS04 Greeting alongside IS01 Breathing. These are transient screen-16 accents, not new routes or status measurements. Random scheduling Replaces the fixed idle-yawn trigger with a random 20-40-second eligible wait, a 3.2-second gesture and a 40-second cooldown. Excludes immediate repeats. Audio and interruption Adds one original 300-ms whistle via the existing optional sound owner. Documents cancellation, quiet/volume/busy suppression and canonical playback identity. Affected original references Manga pages 03-04 (cue language), 14 (circular placement), 15 (handoff/motion); Navigation pages 02, 06, 10, 11-12. Screens 04, 16, 35A/35B, 36-38 retain their identities and navigation. Preservation and evidence Original pages 1-16, including all earlier addenda/errata, are preserved. This revision appends two design pages and this errata page. Runtime behavior and acoustics have static source review only.

Revision register

Historical dates, original IDs and scope retained. Current illustrated flow precedes this register.

DATE / TYPE	DESCRIPTION / ORIGINAL PAGE AND SCREEN IDS
06 October 2026 **CHANGE**	**A shorter boot for a paired Cody** Affected: Original navigation page 20; original screen IDs retained below. A shorter boot for a paired Cody N01 / Supersedes startup timing on pages 02 and 06; screens 01-05 and 16. 06 October 2026 | Source review; physical behavior unverified Prior pages retained. This appendix supersedes the cited behavior and values. Original diagram labels: 01 Sleeping / 2.0 s / 02 Waking / 1.5 s / 03 Ready / 2.0 s Returning device: 03 -> 16 A validated saved first-boot false goes straight to Idle and its clock routine. Entering Idle requests one random Affection or Joy for four seconds, using the same visible-symbol sound owner. Pairing and credential keys are preserved. Service waits are additional The three phases take 5.5 active seconds altogether. Actual startup checkpoints gate progression; waiting for a service does not consume the next phase. Boot shows Cody without a website logo, Debug HUD or manga symbol. First setup: 03 -> 04 -> 05 Hello 04 uses Happy and 'Hi, I'm Cody!' at (233,225,130): 70 ms per character, then one active second after the complete text reaches the panel. It proceeds to Pair 05. There is no second bitmap intro. Boot differs from standby wake Sleep 35A and Wake 35B retain their separate power sequencing. A 400-ms eye closure plus 300-ms hold precedes standby; the existing panel fade is 800 ms. A sleeping expression alone does not request physical standby.
06 October 2026 **CHANGE**	**Idle keeps the route and the controls** Affected: Original navigation page 21; original screen IDs retained below. Idle keeps the route and the controls N02 / Updates pages 10-12, the 05 October idle appendix and screens 16 / 35A / 35B. 06 October 2026 | Source review; physical behavior unverified Prior pages retained. This appendix supersedes the cited behavior and values. Continuous expression and breath The stronger mouth breath composes with the selected front-facing expression. Idle accents use the same route, active clock and response controller. They never change navigation history, sensor timestamps, timeout preferences or device activity. Eligible quiet time Only the normal Main/Idle view schedules Yawn, Whistle and Greeting, including the automatic clock title. Setup, Debug, explicit greetings, sleeping/working/stressed overrides, paused animation and current symbol/caress presentations are excluded. Interaction takes priority Eye responses, caresses and tap feedback remain available through their own owners. Real microphone activity, unrelated speaker playback, authored motion stress and touch release an active gesture. Standby can occur before a gesture becomes due. Canonical device facts LowBattery, Charging and NoWifi consume a valid, fresh canonical snapshot. Battery hysteresis enters at 15% and exits at 20%. Stale or disproven facts invalidate their current symbol; an artistic hold never preserves a false device status. Circle, Back and all sizes Canvas 466 x 466, center (233,233), radius 233. The central safe square is [73,393) on both axes. Back occupies (10,203), 60 x 60, only with a previous route. Enlarged icons may overlap Cody but must avoid Back/status controls and fit the circular chord. Visibility precedes sound A prepared cue or pose does not prove display presentation. A newly visible retired frame admits the SFX. Hidden or blocked icons cannot emit a delayed appearance sound. Native errors remain visible in structured state and logs.

Revision register

Historical dates, original IDs and scope retained. Current illustrated flow precedes this register.

DATE / TYPE	DESCRIPTION / ORIGINAL PAGE AND SCREEN IDS
06 October 2026 **CHANGE**	**Cody Studio on Windows** Affected: Original navigation page 22; original screen IDs retained below. Cody Studio on Windows N03 / Desktop appendix: synthetic preview, audio boundary and branding assets. 06 October 2026 | Source review; physical behavior unverified Prior pages retained. This appendix supersedes the cited behavior and values. VibeWare / Cody Studio Face Shape Inputs Inspect Consolas UI / equal tab widths and padding Fake driver; shared original sounds The PC driver links the existing Cody C++ personality, whistle and typewriter modules. Their original PCM reaches the Windows playback backend; boot uses the generated WAVs. Tap, newly visible symbols, whistle and greeting glyphs connect to that owner. There is one playback voice, no mixer. Synthetic is explicit PC playback is never published into firmware snapshots. Native playback errors are retained and shown without stopping the preview. UI launch and a responding first frame have been observed; listening, complete idle cycles and physical device behavior remain unverified. Approved logo and useful links The existing VibeWare PNG is reused unchanged in the desktop header and window icon. These links open only on a click: GitHub / project Personal website VibeWare manifesto Where the original asset lives Obsidian / 20_Execution / Projects / VibeWare / Branding / vibeware-logo.png. The repository copy, MIT license and provenance are in simulator/windows/assets/branding/. Desktop branding does not change the device boot artwork.

Revision register

Historical dates, original IDs and scope retained. Current illustrated flow precedes this register.

DATE / TYPE	DESCRIPTION / ORIGINAL PAGE AND SCREEN IDS
06 October 2026 **ERRATA**	**Errata and corrections** Affected: Original navigation page 23; original screen IDs retained below. Errata and corrections Revision date: 06 October 2026 / Earlier pages and errata remain intact. 06 October 2026 | Source review; physical behavior unverified Prior pages retained. This appendix supersedes the cited behavior and values. Mouth / Manga 03-04, 15 and 05 October idle appendix Replace the earlier 35% closing and 16-22% reopening guidance with 75% closing and 16-24% reopening. Width moves 18% toward its limits. Stressed peak opening is 0.24. Rest lip and tongue geometry now follow the revised rig. Icons / Manga 03-04, 14; Navigation 10-12; Idle 16 Correct Main/Sleep placement to +30 px right, +40 px down and scale to 3.6x (+20% over 3x). Both fades are 400 ms. Micro remains excluded. All fourteen cues retain an enabled, original appearance sound with bounded admission. Interaction / Idle 16 and Sleep 35A Document moving caress recognition, Affection, varied Fear/Frustration eye responses, hysteresis and one fresh-press tap click. Single-voice playback and best-effort logging cannot block touch/rendering. Idle / 05 October appendices; Navigation 10-12 Correct Whistle width 0.42 to authored minimum 0.5. Retain the 20-40 s eligible wait, 3.2 s gesture and 40 s cooldown. Yawn/Greeting are silent; Whistle attempts one 300-ms sound. Stress does not schedule idle gestures. Boot / Navigation 02, 06; screens 01-05, 16, 35A/35B Use 2.0 s Sleeping, 1.5 s Waking and 2.0 s Ready, excluding actual service waits. Paired returning devices skip setup and request random Affection/Joy in Idle. Standby wake remains a separate sequence. Desktop / Navigation simulator appendix; Manga 15 handoff Record the PC fake audio driver, Consolas UI, equal tabs, approved VibeWare asset and project/site/manifesto links. Synthetic PC observations are separate from firmware and physical-device evidence. Preserved pages 01-19, including earlier errata. Firmware checkpoint de9b8b18 built/flashed on COM10; newer mouth/Whistle checkpoint f5ae5e2 has not been compiled or flashed. Two approved checks passed; four stopped/failed and have not been rerun. No physical visual/audio observation is claimed. Canonical sources for this revision assets/cody/cody.yaml; assets/cody/personality.yaml; CODY_rig.cpp / CODY_response.cpp; docs/architecture/cody/runtime.md, idle-scenes.md and personality-icons.md; simulator/windows/cody_simulator.py and cody_fake_audio.py. Clip durations come from the versioned personality audio manifest.

Revision register

Historical dates, original IDs and scope retained. Current illustrated flow precedes this register.

DATE / TYPE	DESCRIPTION / ORIGINAL PAGE AND SCREEN IDS
06 October 2026 **CHANGE**	**VibeWare first. Cody next.** Affected: Original navigation page 24; original screen IDs retained below. VibeWare first. Cody next. B01 / The approved floppy-insertion animation becomes the opening brand signature. 06 October 2026 | Approved artwork; implemented source; device behavior unverified Previous pages and earlier errata retained. This revision supersedes only the cited boot/branding statements. Every cold boot begins with the VibeWare floppy. Its familiar pixel form introduces the maker before the companion comes to life. Original diagram labels: 0.00 s / 0.58 s / 1.25 s / 1.91 s / 3.00 s A recognizable opening The blue floppy and VW mark remain the original approved artwork. Black resolves the transparent background; exact twofold pixel scaling keeps the retro visual character crisp and centered on the circular display. From identity to personality The insertion motion belongs to the VibeWare introduction. Cody's existing Sleeping 01, Waking 02 and Ready 03 follow it, so the brand has its own moment before the character takes over. VibeWare manifesto https://umbertogiacobbi.biz/vibeware/manifesto A shared opening signature for Cody and Luna.
06 October 2026 **CHANGE**	**The VibeWare startup sequence** Affected: Original navigation page 25; original screen IDs retained below. The VibeWare startup sequence B02 / VibeWare precedes screens 01-03; first-run setup and returning-device routes retain their identities. 06 October 2026 | Approved artwork; implemented source; device behavior unverified Previous pages and earlier errata retained. This revision supersedes only the cited boot/branding statements. VIBEWARE 3.5 s per cycle Approved floppy 01 / SLEEPING 2.0 s Existing Cody fade 02 / WAKING 1.5 s Existing expression 03 / READY 2.0 s Existing expression NEXT ROUTE Existing policy Hello 04 or Idle 16 Nominal artwork dwell: at least 3.5 s of branding plus the existing 5.5 s character sequence. Real startup work, frame transfer and deliberate DMA parking can add wall time. Complete the visible cycle The 42 original frames retain their 80/90-ms timings. Cody starts each dwell after frame retirement and repeats while the real service checkpoint is pending. A successful checkpoint never truncates the current cycle or invents numeric loading progress. Keep the right owner Cody uses native 2D and its existing bounded DMA owner. Luna uses LVGL with the same flash-owned data. Original transparency is composited on black. No removable SD, network request or on-device GIF decoder is required. Preserve ordinary wake The introduction belongs to cold boot and software reset. Cody standby wake and actual deep-sleep Wake keep their existing presentation. First-boot, pairing and stored preferences are unchanged. Errors remain real and startup-critical failures stop handoff. Implementation evidence Approved GIF packaged; native/LVGL and Windows source integrated. Firmware build/size, host checks, simulator execution, rotations and physical fluidity are still pending explicit authorization.

Revision register

Historical dates, original IDs and scope retained. Current illustrated flow precedes this register.

DATE / TYPE	DESCRIPTION / ORIGINAL PAGE AND SCREEN IDS
06 October 2026 **ERRATA**	**Errata and corrections** Affected: Original navigation page 26; original screen IDs retained below. Errata and corrections Revision date: 06 October 2026 / VibeWare boot identity / Every earlier page and correction is preserved. 06 October 2026 | Approved artwork; implemented source; device behavior unverified Previous pages and earlier errata retained. This revision supersedes only the cited boot/branding statements. Affected original pages and screens Original page 02 (Boot and entry); page 20 / N01 (shorter boot); page 22 / N03 (Studio branding); page 23 (earlier errata). Screen IDs 01-05 and 16 remain unchanged; 35A/35B wake is unaffected. Corrections in this revision Replace the statement that startup shows only Cody with the VibeWare introduction before screens 01-03. Retain the existing 2 / 1.5 / 2-second character phases. Replace the old public GitHub manifesto reference with the user-provided website URL. Desktop-only branding is now extended to the device boot. Preservation and evidence All 23 existing pages, earlier errata, bookmarks and original page content are retained. New pages B01 and B02 document the supplied artwork and implemented behavior. This final page records the revision; it does not certify firmware compilation or physical behavior. Approved source and canonical reference Source: Obsidian / VibeWare / press-kit / assets / boot / vibeware-floppy-insert-transparent.gif. The original is copied unchanged into the repository; generated metadata records its SHA-256, disposal-composited crop, original durations and flash pixel-data size. https://umbertogiacobbi.biz/vibeware/manifesto Pending validation Build and size budgets, frame dwell under load, real errors, rotation, first setup/returning boot, standby/deep-sleep wake, Windows presentation and physical appearance remain unverified. No firmware tests, simulator launch or hardware operation accompanied this revision.
09 October 2026 **CHANGE**	**Startup: two saved decisions** Affected: Original navigation page 27; original screen IDs retained below. Startup: two saved decisions Local Wi-Fi/IP first. Then the retained Codex pairing. Public Internet is not required. 09 October 2026 | Source implementation; firmware/device unverified 1 / No saved Wi-Fi profile A valid absent-profile observation opens 04 > 05 > 06 > 07 > 09. Debug may show 39 before 09. Continue: 10 > 36 > 11 (skin), then the Codex decision. 2 / Saved Wi-Fi; waiting for the network 42 / No connection keeps the profile while the Wi-Fi owner reconnects. Network setup reopens 04-09; Later returns to Idle. Invalid/stale data shows UNAVAILABLE. 3 / LAN ready; no saved Codex pairing 40 / Connect Codex? Yes starts the code on 12. No returns to 16 / Idle without a settings write or CCP request. The next boot may ask again. 4 / LAN ready; saved Codex pairing Adopt the saved attempt and search on 14. Only authenticated READY enters 15. A retained identity alone never means the PC is connected. Connect Codex? Yes No 40 / Explicit Yes or No Illustrative UI. Choice controls do not start pairing until the user acts.

Revision register

Historical dates, original IDs and scope retained. Current illustrated flow precedes this register.

DATE / TYPE	DESCRIPTION / ORIGINAL PAGE AND SCREEN IDS
09 October 2026 **CHANGE**	**Reopen setup from Cody** Affected: Original navigation page 28; original screen IDs retained below. Reopen setup from Cody Hold the visible character still for 1.5 seconds. No button-based factory reset is added. 09 October 2026 | Source implementation; firmware/device unverified 41 / Setup Connect Codex opens a fresh display-code attempt. Network setup reopens 04-09. Left Back returns to Idle. Opening or leaving the menu erases no Wi-Fi, skin or pairing. Keep the gesture deliberate Available from stable Idle, PC search/connected and terminal CCP errors. Moving more than 12 px, a sample gap over 250 ms, rotation or a lifecycle interruption cancels the hold. Busy work and active provisioning are excluded; release before choosing. PWR / existing policy Single: standby/wake; active Debug defaults to screenshot countdown. Long release: standby. Debug double within 500 ms, or a continuous 3-second hold: restart preserving data. BOOT / existing policy Short: restore a dim/sleeping panel first, otherwise toggle fullscreen/status arcs. Hold 3 seconds: Debug restart; Release has no firmware reset action. Saved Wi-Fi and CCP survive restart. Setup Connect Codex Network setup 41 / Reversible setup access Illustrative UI. A true factory erase is a separate explicitly requested operation.
09 October 2026 **ERRATA**	**Errata and corrections** Affected: Original navigation page 29; original screen IDs retained below. Errata and corrections Revision date: 09 October 2026 / CODY-SETUP-20261009 09 October 2026 | Source implementation; firmware/device unverified Original analysis gap Affected original pages and screen IDs Original pages 02, 04, 16 and 25; screens 04-16, 35B, 36. Earlier errata on pages 19, 23 and 26 remain unchanged. Corrections Add 40 / optional Yes-No Codex choice, 41 / character-hold Setup, and 42 / reconnect wait. 09 means local Wi-Fi/IP; 11 selects a skin. No/Later performs no persistence or new CCP request. Saved pairing returns to 14 and requires authenticated READY for 15. PWR/BOOT do not clear pairing. Preservation All 26 previous pages, earlier corrections, bookmarks and unrelated content are retained. This dated addendum supersedes only the cited startup/setup/install statements; the original numbering stays stable. Evidence and limits Firmware source implementation and static integration review completed. PDF pages rendered and visually reviewed. No firmware tests, validation scans, configure/build/size, simulator execution, device pairing/input, flash or erase accompanied this revision. Runtime validation is pending. The initial analysis omitted startup with Wi-Fi already configured but no saved Codex pairing, and did not define a reversible user entry to setup. This was an original analysis gap, now addressed in source.

Revision register

Historical dates, original IDs and scope retained. Current illustrated flow precedes this register.

DATE / TYPE	DESCRIPTION / ORIGINAL PAGE AND SCREEN IDS
09 October 2026 **CHANGE**	**Setup after standby** Affected: Original navigation page 30; original screen IDs retained below. Setup after standby Hold Cody for 1.5 seconds to choose Network setup or Connect Codex. CODY-SETUP-RECOVERY-20261009 | Physical review pending 04-06 / Escape the network loop After inactivity, Welcome previously sent its first touch straight back to Let's pair. Welcome now opens 41 on a stationary tap release. A character hold also opens 41 from timeout Welcome, Let's pair or the installation QR page when no operation is busy. 35B / Wake, then hold A finger already down during wake starts its 1.5-second hold only on a fresh acquired sample with the restored visible character. Hidden standby/wake time never counts. Movement over 12 px, report gaps over 250 ms or rotation cancel the hold. Release before choosing. 41 / Two explicit destinations Upper Connect Codex opens 12 and its six-character CCP code using the local Wi-Fi/IP connection. Lower Network setup explicitly opens 04-09. No Internet probe is required. Active provisioning, worker admission and pending cancellation block menu access. Setup Connect Codex Network setup 41 / Same choices after wake Illustrative UI. Existing credentials and retained CCP pairing are preserved.
09 October 2026 **ERRATA**	**Errata and corrections** Affected: Original navigation page 31; original screen IDs retained below. Errata and corrections Revision date: 09 October 2026 / recovery correction CODY-SETUP-RECOVERY-20261009 | Physical review pending Original analysis gap Affected pages and screens Previous setup addendum: page 28. Affected screen IDs: 04, 05, 06, 12, 35B and 41. Earlier dated errata remain intact. Corrections Timeout Welcome tap release and stationary character holds on resting 04-06 reopen 41. A hold spanning wake starts only after visible restoration. Connect Codex goes to 12; Network setup goes to 04-09. Busy work and pending cleanup cannot be bypassed. Evidence and limits A user-authorized 90-second passive serial capture confirmed LAN/DHCP, Welcome inactivity return and standby. No Connect Codex press occurred in that capture; the initial wrong-selection report remains unresolved. The correction has static source review; corrected physical behavior still needs observation. Preservation All 29 preceding pages, prior errata and unrelated content are retained. This addendum supersedes only the cited escape/gesture behavior. Saved credentials are not erased. The first analysis did not reconcile the legacy Welcome timeout/touch path with reopening setup after standby. This was an original analysis gap.

Revision register

Historical dates, original IDs and scope retained. Current illustrated flow precedes this register.

DATE / TYPE	DESCRIPTION / ORIGINAL PAGE AND SCREEN IDS
09 October 2026 **CHANGE**	**Cody action language** Affected: Original navigation page 32; original screen IDs retained below. Cody action language IMPORTANT UI DECISION / approved 09 October 2026 / binding for future screens CODY-UI-DECISION-20261009 | Physical review pending Layout rule Two actions: rounded cards side by side. Three: the same pair plus one centered action below. One: a wide centered capsule with its icon left of the label. Shared visual language Dark restrained gradients, thin semantic borders, white labels and action icons. Teal: affirmative/Codex; blue: network; graphite: No/Later/Options; amber: Retry/Cancel. Circular geometry Keep Back separate at the left. Share rendering and touch bounds in every orientation. QR pages keep the quiet zone and use the compact single-action variant.
09 October 2026 **CHANGE**	**Options and touch continuity** Affected: Original navigation page 33; original screen IDs retained below. Options and touch continuity Setup keeps Network setup and Connect Codex distinct. Options opens screen 10. CODY-UI-DECISION-20261009 | Physical review pending 41 / Setup Left card: Connect Codex. Right card: Network setup. Centered third action: Options. Options opens 10 / Make it yours, then 36 and 11 / skin. Done returns to Setup; Back retraces this local preferences path. No network or Codex association is erased or implicitly started. 40 / Connect Codex? and 42 / No connection Yes/No and Network setup/Later are side by side, with purpose-specific icons and colors. Their existing explicit backend admission stays intact. Screen IDs 05-15 and 36 share the action styling where an action is present. Observed freeze / original cause An authorized 90-second reset/capture recorded Yes at 16497 ms, entry to Connect Codex at 16498 ms, then a CST9217 report with fifteen FF bytes and ACK=FF at 17112 ms (expected AB). ESP_ERR_INVALID_RESPONSE stopped the renderer. LAN/IP was ready. Scoped runtime correction The touch owner still rejects malformed reports and publishes the real error. After startup only, that acquisition error is optional for rendering. Discard queued gesture reports, cancel the gesture and require a real acquired release before another press. No release is invented. The same acquisition error can mean an I2C NACK; its origin is not inferred. Startup, other acquisition errors, locks and route failures remain terminal. Evidence boundary Native source integration and approved mockups are documented here. The underlying cause of the FF report and corrected physical touch/standby behavior remain unverified. A successful build/flash alone does not establish those outcomes.

Revision register

Historical dates, original IDs and scope retained. Current illustrated flow precedes this register.

DATE / TYPE	DESCRIPTION / ORIGINAL PAGE AND SCREEN IDS
09 October 2026 **ERRATA**	**Errata and corrections** Affected: Original navigation page 34; original screen IDs retained below. Errata and corrections Revision date: 09 October 2026 / important UI decision and touch correction CODY-UI-DECISION-20261009 | Physical review pending Important design decision The user approved the two-column pair plus centered third action, and the wide single action with icon to the left. These are binding layouts from this revision onward. Gradients, icons and semantic colors are required across Cody screens. Affected original material Original pages 02, 04, 16 and 25; screens 04-16, 35B, 36. Earlier errata on pages 19, 23 and 26 remain unchanged. Also affected: screens 05-15, 35B, 36 and 40-42. Earlier stacked-blue control illustrations are superseded only in their action layout/styling. Original analysis gaps Corrections and limits Yes/No become horizontal and semantic. The measured invalid touch report retains its original error while rendering continues with interrupted gestures. Hardware FF root cause and physical corrected behavior remain open. Preservation All 31 preceding pages, earlier errata and unrelated content remain unchanged. Approved images are design references, not physical device screenshots. The initial analysis omitted Options re-entry and did not distinguish an optional malformed runtime touch report from renderer failure. This was an initial analysis gap. Options now opens 10 and returns to Setup after preferences/skin.
10 October 2026 **ADDENDUM**	**Addendum / automatic context** Affected: Original navigation page 35; original screen IDs retained below. Addendum / automatic context CCP 0.4 / screens 15-20 and 32 / corrected 10 October 2026. 10 October 2026 | CODY-AUTO-CONTEXT-20261010 | Refer to screen IDs 15 / Connected, waiting for Codex An authenticated PC reply proves presence. Until a genuine prompt arrives, show Waiting for Codex. There is no device picker and no manual selection command in Codex. The user prompt chooses context Trusted UserPromptSubmit sends the exact chat and turn identities to CCP. The latest prompt-hook emission becomes the followed context for this PC's paired Cody devices. SessionStart alone does not select a chat. Background chats stay in the background Tool activity, completion and interrupts from another chat cannot steal the followed context. A new prompt in that other chat switches it. A tab click alone has no documented hook signal and is not claimed as focus tracking. 32 / Recover the same context LAN reconnect restores the broker's current context. A broker restart waits for the next genuine prompt. The workspace label is display text, not identity. No transcripts, prompts or responses are retained by CCP.

Revision register

Historical dates, original IDs and scope retained. Current illustrated flow precedes this register.

DATE / TYPE	DESCRIPTION / ORIGINAL PAGE AND SCREEN IDS
10 October 2026 ERRATA	**Errata and corrections** Affected: Original navigation page 36; original screen IDs retained below. Errata and corrections Revision date: 10 October 2026 / authenticated chat activity CODY-CCP-ACTIVITY-20261010 | Physical review pending Affected original material Original pages 5-6 and 8; screens 15-20, 26-27, 31-32. Analysis gap corrected Contract and UI CCP 0.3 adds metadata-only hooks, exact session selection and nonce-bound ACTIVITY messages. The canonical snapshot owns validity and errors. 18U adds the unavailable state. Setup re-entry preserves the selected context. Evidence and limits The user confirmed Connected on 10 October after real pairing. That evidence belongs to the previous firmware and CCP 0.2. New code is implemented; host checks, hook trust/autoload and physical 0.3 behavior are not established here. A response-ready event is never reported as task success. Preservation All 34 previous pages and earlier errata remain unchanged. The approved gradient/icon action layouts remain binding. These diagrams describe architecture, not captured device pixels. Screen 15 originally proved PC presence only. The initial analysis omitted explicit chat selection, shared runtime lifetime and event freshness. This was an initial analysis gap; it is now addressed in source.
10 October 2026 ADDENDUM	**Addendum / current integration contract** Affected: Original navigation page 37; original screen IDs retained below. Addendum / current integration contract Screen IDs 15-20, 18U and 32 / genuine hooks are required. 10 October 2026 | CODY-AUTO-CONTEXT-20261010 | Refer to screen IDs PC ownership One local broker owns the paired PC identity and authenticated activity. Multiple MCP clients share it. Trusted hook metadata supplies session/turn/tool identities; prompts, replies, transcripts and tool arguments are discarded at ingestion. Device ownership Cody receives nonce-bound ACTIVITY alongside authenticated READY. The canonical snapshot owns validity, timestamps and real errors. UI and audio consume it; neither chooses a chat nor reads host data independently. Limits and observation Eight seconds without packets expires device activity; 120 seconds without an active hook marks activity unavailable. Missing input never becomes success. Hook acceptance is not evidence of displayed pixels or audible playback. Deployment and references CCP 0.4 removes manual select/clear tools. Install the updated plugin, review/trust its hooks and submit a real prompt. Source: learn.chatgpt.com/docs/hooks and developers.openai.com/plugins/build/plugins. Actual hook/display delivery remains to verify.

Revision register

Historical dates, original IDs and scope retained. Current illustrated flow precedes this register.

DATE / TYPE	DESCRIPTION / ORIGINAL PAGE AND SCREEN IDS
10 October 2026 ERRATA	**Errata and corrections** Affected: Original navigation page 38; original screen IDs retained below. Errata and corrections Revision date: 10 October 2026 / CODY-AUTO-CONTEXT-20261010 10 October 2026 | CODY-AUTO-CONTEXT-20261010 | Refer to screen IDs Main pages updated Current flow is integrated from the cover onward, using screen IDs as the reference. Screens 10-15, 36, 40 and 41 now show Skin, real pairing and the agreed setup access. Screens 15-20, 18U and 32 describe automatic context and real activity. Manual selection removed History retained Earlier addenda, unrelated pages and errata remain at the end. The activity addendum itself is corrected. Historical errata mentioning explicit selection describe the previous decision and are superseded by this dated revision, not current instructions. Evidence and limits CCP 0.4 and the Waiting for Codex caption are source changes. New host checks, plugin hook execution and physical behavior require their own evidence. The prior successful Connected/standby capture does not verify this revision. Screen artwork is illustrative. The old Choose/Pick a chat prerequisite was an initial analysis gap. CCP associates the latest genuine prompt automatically. Cody only presents the supplied context. Background chat events do not change it.
10 October 2026 ADDENDUM	**Addendum / retained pairing** Affected: Original navigation page 39; original screen IDs retained below. Addendum / retained pairing Decision record / 10 October 2026 / screens 04-16, 35B, 36 and 40-42. CODY-RETAINED-FLOW-20261010 | Refer to screen IDs First boot / Already configured Without saved Wi-Fi, open 04-09. With credentials but no IP, use 42. With LAN but no pairing, offer 40. A valid record resumes 14-15 without checking Internet. Setup / Consent to replace Hold the character for 1.5 seconds to open 41. A saved pair shows Already paired: Keep pairing, Pair again or Forget. Retry resumes discovery without a new code. Pairing / Presence / Activity 13 confirms pairing. Let's go searches the PC immediately. 15 confirms CCP and waits for a genuine prompt. Hooks follow its chat automatically; manual selection is removed. Options / Local choices Options opens Make it yours and reuses Settings and Skin. Return to the correct caller. Keep preferences, PC replacement and explicit erasure separate.

Revision register

Historical dates, original IDs and scope retained. Current illustrated flow precedes this register.

DATE / TYPE	DESCRIPTION / ORIGINAL PAGE AND SCREEN IDS
10 October 2026 **ADDENDUM**	**Addendum / recovery cases** Affected: Original navigation page 40; original screen IDs retained below. Addendum / recovery cases Screens 14-16, 18U, 32, 35A/35B and 42 / preserve the saved identity. CODY-RETAINED-FLOW-20261010 | Refer to screen IDs Internet down, LAN working Continue using local Wi-Fi/IP between Cody and CCP. Codex online services are separate: a PC present on the LAN does not guarantee a model response. Wi-Fi or local IP unavailable Preserve credentials and paired PC. Startup shows 42 with Network setup or Later. Recovery waits for LAN and retries the saved identity. Real transport errors remain visible in state. PC or CCP unavailable Keep searching on 14; use 32 after loss of previously followed activity. Retry searches without a new code. A 1.5-second Cody hold can still open Setup. 35A / 35B and firmware updates Ordinary standby preserves route and pairing. Wake restores authenticated presence. A normal application flash preserves NVS; erasure, damaged data or another PC identity are separate cases.
10 October 2026 **ADDENDUM**	**Addendum / confirmation and reset** Affected: Original navigation page 41; original screen IDs retained below. Addendum / confirmation and reset Screens 12, 13, 40 and 41 / preserve network, skin, preferences and logs. CODY-RETAINED-FLOW-20261010 | Refer to screen IDs Two candidates, active records retained Persist the PC's DPAPI candidate before PAIR; Cody uses ccp_pending. Preserve previous active records separately. CONFIRM or fresh READY proves the PC and allows Cody commit/readback. Close with proof of commit The PC promotes after authenticated ACTIVE or COMMITTED, never FIND alone. Each valid READY makes Cody repeat COMMITTED with the current nonce, recovering restarts and lost ACKs without a new code. Cancel / End the attempt Cancel from the ready-code screen discards Cody's candidate and preserves the old operational link; the PC candidate stays pending. Replacement requires a new code and explicit replace_pending:true. Old-key proof cannot authorize deletion. Forget / Codex pairing only Confirm Forget pairing with Go back / Forget and Only Codex is reset. Delete only Cody's CCP records; the PC keeps its record. After the result, show Unpaired / Pairing removed, then Done -> Setup.

Revision register

Historical dates, original IDs and scope retained. Current illustrated flow precedes this register.

DATE / TYPE	DESCRIPTION / ORIGINAL PAGE AND SCREEN IDS
10 October 2026 **ERRATA**	**Errata and corrections** Affected: Original navigation page 42; original screen IDs retained below. Errata and corrections Revision date: 10 October 2026 / CODY-RETAINED-FLOW-20261010 CODY-RETAINED-FLOW-20261010 | Refer to screen IDs Original pages 1, 2, 3, 4, 5, 6, 10, 12 Current flow is integrated into the main pages while preserving unrelated content and earlier addenda/corrections. Refer to screen IDs even when pagination changes. Screens 10-16, 32, 35B and 40-42 Options saves four preferences; Already paired offers Keep pairing, Pair again and Forget. Separate Retry, Cancel and reset. Journals and COMMITTED prove commit. Let's go searches immediately. Initial analysis gap and responsibilities Commissioning, recovery and activity were previously conflated, without replacement confirmation. Those decisions are now explicit. CCP follows the genuine prompt; the earlier manual chat selection is retired. UI decision and evidence Retain the approved language: gradients, icons, horizontal pairs or a single capsule, and buttons without teletype. This revision updates source and documents; pending device, hook and simulator evidence is listed separately.
10 October 2026 **ADDENDUM**	**27 / Choose a reply** Affected: Original navigation page 43; original screen IDs retained below. 27 / Choose a reply 27 / Review choice Addendum / notices and decisions Revision date: 10 October 2026 / screens 26, 27 and 31. CODY-NOTIFICATIONS-20261010 | Refer to screen IDs 26 / Codex needs you and Open Show declared context, title and notice. The request has its own ticket and lasts 180 seconds. Opening or closing a view neither extends the deadline nor selects an answer. Use two cards side by side; with three, add one centered below. Each choice has a stable ID and meaning. Back returns to 26 and preserves the question without sending. A choice opens a review with its description and Send capsule. Back returns to options. After Send, keep the choice fixed and show Sending reply. Do not add a fourth button below three cards. 31 / Reply sent after delivery UDP received ACK leaves Waiting for Codex: CCP recorded the choice. Only delivered shows Reply sent and Delivered to Codex; Done resumes the previous context, 17, 18 or 16.

Revision register

Historical dates, original IDs and scope retained. Current illustrated flow precedes this register.

DATE / TYPE	DESCRIPTION / ORIGINAL PAGE AND SCREEN IDS
10 October 2026 **ADDENDUM**	**23 -> 24 / View failures** Affected: Original navigation page 44; original screen IDs retained below. 21 / PR pending 23 -> 24 / View failures Addendum / read-only PRs A03 remains in force / screens 21-24; screen 25 retired. CODY-NOTIFICATIONS-20261010 | Refer to screen IDs Observe only the indicated PR. Preserve the exact head in Codex's explicit snapshot. Stop is not check evidence; no merge, approve, close, rerun or comment is offered. 22 / Checks running and Checks passed Show numbers only from a complete current list for the same head. Checks passed has no buttons: wait for the narrative and three seconds, then resume work. The only action opens real failed-check names: at most six, each up to 48 ASCII characters. Explicitly reject unrepresentable input; never truncate names or invent totals. 24 read-only / 25 retired Show three names per page, up to two lines each; scroll vertically and keep Back lateral. No View log or selectable rows. Logs, diagnosis and corrections stay on the PC.
10 October 2026 **ADDENDUM**	**Addendum / delivery and commands** Affected: Original navigation page 45; original screen IDs retained below. Addendum / delivery and commands Screens 31, 32 and new setup / distinguish acceptance from outcome. CODY-NOTIFICATIONS-20261010 | Refer to screen IDs received is not delivered Poll returns the choice and answer_id. A later poll with matching acknowledge_answer_id proves caller receipt; only then enter delivered and screen 31. Expiry and uncertain delivery The 180-second deadline also applies in received. After Send, show Reply unconfirmed: only the ACK may be missing. Before Send, show Request expired. Retry or a late ACK cannot reopen the question. Explicit restart / Data retained Write 'restart the device, code 043533477' in the current message: nine digits, including zero. It prevents mistakes; it is not a password. Never fill it from documents. Use the paired LAN peer and retain data. ACK = accepted; boot = fresh presence. Factory reset / First setup 'Factory reset Cody, code 043533477' removes preferences, Wi-Fi and pairing; retain firmware, assets and SD. ACK means admission. Reboot after verified erasure, then restart Wi-Fi setup. A failure stays visible and never triggers reboot.

Revision register

Historical dates, original IDs and scope retained. Current illustrated flow precedes this register.

DATE / TYPE	DESCRIPTION / ORIGINAL PAGE AND SCREEN IDS
10 October 2026 ERRATA	**Errata and corrections** Affected: Original navigation page 46; original screen IDs retained below. Errata and corrections Revision date: 10 October 2026 / CODY-NOTIFICATIONS-20261010 CODY-NOTIFICATIONS-20261010 | Refer to screen IDs Original pages 1, 5, 6, 7, 8, 9, 10 Affected main pages are updated while preserving unrelated flow pages and earlier addenda. Use screen IDs. Screens 21-27 and 31-32 Apply A03: PRs are read-only and 25 is retired. View log and the old vertical list are removed. 27 now uses cards and a Send review; 31 requires delivered after recipient ACK. Initial analysis gap Receipt, delivery and expiry were ambiguous, alongside outdated PR illustrations. Separate them with tickets, received/delivered and 180 seconds. Timeout and offline never choose answers. History, commands and evidence Separate restart and factory reset: restart retains data; factory reset removes configuration to return to setup. ACK means admission. Preserve history and real errors; done.md records host and physical results.
10 October 2026 CHANGE	**A single final revision register** Affected: Previous pages 47-50; earlier history on pages 13-46 (Navigation) or 23-46 (Planning). The 10 October screen supplements previously on pages 47-50 are reorganized into this grid. Their dates, decisions, screen IDs and evidence limits remain explicit. All preceding 46 pages, including historical artwork and earlier corrections, remain intact. Earlier decisions are historical: 03 October A01 separates installation and provisioning; 04 October A02 preserves the skin selector's caller, A03 keeps PR status read-only, and A04 gates pairing handoff. The 05-06 October idle and branding records, and the 09-10 October setup, retained pairing, activity and notification revisions remain in their preserved pages. Evidence / limits: Document reorganization only. Original physical page numbers remain valid through page 46; later references use stable screen IDs.
10 October 2026 ADDENDUM	**Boot and Wi-Fi** Affected: Original page 47; branding, screens 01-09, 39, 40 and 42. Cody AI Companion and A distraction-free sidekick appear together above the complete floppy artwork. Its 42 frames retain the 3.5-second cycle; startup work can extend wall time. Title y=60, subtitle y=110, artwork (137,164), 192 x 219. After local startup, absent Wi-Fi opens Welcome 04, missing association/IP opens 42, a valid LAN without pairing opens 40, and retained pairing searches its PC on 14. Screen 05 opens the installation QR on 06 without starting radios; Pair Cody starts Bluetooth on 07. The session QR exists only at ReadyToScan and retires when credentials or connection are in progress. Cancel waits for confirmed cleanup. Screen 09 admits Continue only with current valid Wi-Fi/IP. Screen 42 offers Network setup or Later. Local LAN and public Internet are separate facts. Debug handoff 39 requires a fresh tap; Release continues to 09.

Revision register

Historical dates, original IDs and scope retained. Current illustrated flow precedes this register.

DATE / TYPE	DESCRIPTION / ORIGINAL PAGE AND SCREEN IDS
10 October 2026 **ADDENDUM**	**Pairing and connection** Affected: Original page 48; screens 12-15, 40 and 41. Hold the visible character still for 1.5 seconds to open Setup. Connect Codex and Network setup share a row; Options is centered below. Release the opening touch before selecting. Back follows the valid previous route. Already paired offers Keep pairing, Pair again and Forget. Only Pair again authorizes replacement; Forget needs a second confirmation. Pairing paused identifies an incomplete candidate. Pairing error preserves the storage cause and permits only explicit removal. Preparing secure code / Please wait / About 30 seconds is an estimate, not measured progress. Use all six characters on the intended Cody after discovery. The backend pairing window is five minutes; screen inactivity is three minutes from code readiness. You're all set follows the two-sided persisted handshake. Let's go searches the retained PC immediately, without the earlier ten-second Idle detour. Security clarification: a signed READY now challenges the connection; the broker admits presence and releases current data only after the fresh endpoint-bound COMMITTED response. Genuine prompt hooks establish chat activity, independently of pairing or presence.
10 October 2026 **ADDENDUM**	**Settings and complete controls** Affected: Original page 49; screens 10, 11, 36 and 41. Shake to wake, Auto-rotate and Sounds retain persistent On/Off values. Orientation shows Auto when auto-rotation is on; manual orientation is 0 or 180 when off. Sounds Off stops playback while preserving microphone and wake-word operation. Next opens Settings / Personalization / Choose Cody's look. Continue opens the stable-ID skin selector: Pearl Mist, Aurora Veil, Cosmic Stardust, Enchanted Mosaic and Dreamwave. A save preserves the prior value until successful write/readback. Save failed and Retry retain the cause and requested value; no silent repair is admitted. Two actions use side-by-side gradient cards; three add one centered card below. A single action uses an icon-left capsule. Captions never use teletype: controls and touch become available together after title and body narration. Preserve QR quiet zones and the local circular chord.
10 October 2026 **ERRATA**	**Current screen corrections and evidence** Affected: Original page 50; current base pages 2, 3, 4, 12; branding, screens 01-15, 36, 40-42. Replace the earlier title-free/twofold boot drawing with the current title, subtitle and 192 x 219 artwork. Replace obsolete setup, secure-code preparation, connection detour and settings descriptions with the current contracts above. Historical values and diagrams retain their dated meaning. The source-based static schematics use illustrative fonts and values. They are neither simulator frames nor device captures. Layout coordinates are not sensor measurements. This PDF revision does not verify firmware, simulator, hooks or physical behavior. Evidence / limits: English grid replaces the latest four appendix pages; prior corrections and unrelated pages are preserved.

Revision register

Historical dates, original IDs and scope retained. Current illustrated flow precedes this register.

DATE / TYPE	DESCRIPTION / ORIGINAL PAGE AND SCREEN IDS
11 October 2026 **ERRATA**	**English throughout the document** Affected: Original pages 1, 5-10, 29, 31, 34, 36, 38-46; previous final page 53. Historical Italian text, headings, diagram captions and footers translated into English; original dates, screen IDs, technical values, evidence limits and artwork retained at that revision. That language review also covered the English consolidated connection atlas, the four-page A5 pairing flyer and the manga status atlas; those documents required no language correction. Evidence / limits: Document language and visual review only; no firmware build, simulator or physical-device verification.
11 October 2026 **CHANGE**	**Continuous illustrated navigation and consolidated history** Affected: Original main pages 1-12; historical pages 13-53; screens 01-42, 28-30, 33-35. Main routes are rebuilt as illustrated flows with the common cyan Cody and writable NOTES. Restore planned audio screens 28-30, distinguish ordinary PR activity from a separate application, and integrate quiet battery notices after ten eligible Home seconds. All previous Addendum, Change and Errata pages are consolidated here with their original dates, page references and substantive text. Security remains a clearly labelled subsection of this final register. Evidence / limits: Editorial schematics and source review. No test, build, simulator or physical verification.

Security

Historical dates, original IDs and scope retained. Current illustrated flow precedes this register.

DATE / TYPE	DESCRIPTION / ORIGINAL PAGE AND SCREEN IDS
10 October 2026 **SECURITY**	**Fresh proof before presence or current data** Affected: Screens 12-15, 18U, 26-27, 31-32; CCP FIND / READY / COMMITTED. A captured authenticated broadcast FIND must not establish broker presence, select a notification destination or obtain current ACTIVITY, TECH or EVENT data. The broker issues a random challenge, signed together with the observed device IPv4 address and UDP port. Cody verifies that endpoint before answering. READY and COMMITTED use explicit ready-v2 and committed-v2 authentication domains and the fields device, pc, nonce, challenge, address, port and proof. Only the matching one-time challenge response from the challenged endpoint admits liveness, commit recovery and current-data delivery. Old and new firmware/plugin implementations must be updated together; no legacy handshake fallback is provided. Evidence / limits: Source implementation and static review. CCP 0.6.3 is not deployed or physically verified by this document revision.
10 October 2026 **SECURITY**	**Bound unauthenticated work** Affected: Firmware UDP worker; PC discovery and pairing; CCP ingress and runtime logs. Firmware limits the receive pass by packet count and elapsed time so local commands, expiry and protocol maintenance still run while UDP remains busy. Fixed-size global/per-source ingress admission precedes expensive authentication; source-address rotation cannot remove the global budget. PC discovery bounds total offers and per-source contributions, and pairing bounds distinct verification work and time. Overflow is an explicit failure, rather than a partial result presented as complete. The broker applies ingress limits before expensive credential access and aggregates rejection diagnostics; rotating logs bound retained storage. Initial limits: firmware receives at most eight packets or a 5-ms slice, with 32 packets/s globally (burst 64), 16/s per IP (burst 32), and 16 source slots. PC UDP allows 64/s globally (burst 128), 16/s per IP (burst 32), and 64 slots. Discovery admits 16 offers, four per IP, and 128 received packets; pairing verification has a two-second deadline before candidate persistence. Endpoint challenges have a two-second lifetime and a 128-entry cap. Rejection summaries appear at most once per five seconds. Broker logs retain at most three 2-MiB files; local control admits at most 32 concurrent workers, retaining its three-second socket deadline and 64-KiB request-body limit. Evidence / limits: Initial tuning constants require measurement against real pairing/reconnection bursts. No flood probe, suite, build or flash is claimed.
10 October 2026 **SECURITY**	**Retained safeguards and deferred protocol work** Affected: Pairing code and link-key derivation; ACTIVITY / TECH / EVENT confidentiality; optional device HTTP. Keep local user admission, the expiring pairing window, constant-time HMAC verification, separate active/pending durable records, strict identities and packet bounds, authenticated choices/settings/debug/reset commands, and loopback-only authenticated PC control. Native approval remains on the computer. Failed storage or authentication must not become success. The six-character code still permits offline candidate checking from a captured pairing transcript; online rate limiting does not remove that risk. CCP payloads remain authenticated but unencrypted. Evaluated PAKE or high-entropy QR pairing, followed by standard authenticated encryption and replay discipline, is deferred as a coordinated protocol redesign. No custom cryptography or confidentiality claim is introduced. Optional device HTTP behavior is a separate security scope: enabling its plaintext bearer API or broad health endpoint requires its own review. This CCP hardening does not claim to secure an enabled device HTTP service or a hostile local machine. Log scope: broker/network diagnostics rotate under the exclusive broker owner. The startup-only runtime.log still appends across launches; LAN UDP rejection traffic cannot write to it. Bounded multi-process bootstrap logging remains a separate follow-up. Evidence / limits: Remaining risks are recorded in planned-todo.md. Compilation, device stack headroom and physical pairing/recovery checks remain pending in TODO.md.

NAVIGATION ATLAS

Revision register

Dated decisions, corrections and evidence. Historical entries retain their original scope.

DATE / TYPE	REVISION DETAILS AND SUPPORTING MATERIAL
2026-10-12 **CHANGE**	**Coordinated cover and navigable contents** Affected: All original pages; existing correction and Security sections preserved Add VibeWare cover artwork, author copyright and Draft / Confidential / Internal use only classification. Contents and bookmarks point to the final document pages; historical page and screen references retain their original identities. Evidence / limits: PDF authoring and visual review; no firmware execution.