DRAFT / SOURCE REFERENCE



CODY / VIBEWARE

CCP Communication Atlas

A visual guide to pairing, replies and voice

DRAFT / 15 October 2026

Copyright (c) 2026 Umberto Giacobbi

umbertogiacobbi.biz

Contents

Main sections / click a row to jump to its page

System map 3

Setup 4

Pairing 5

Everyday work 6

Questions 7

Recording 8

Audio delivery 9

Available operations 10

Diagnosis 11

Sources and evidence 12


Revision register 13

Security 15

Page numbers refer to this PDF. Original screen IDs identify the illustrated routes.

01 / THE WHOLE SYSTEM

One device, one PC, one chat

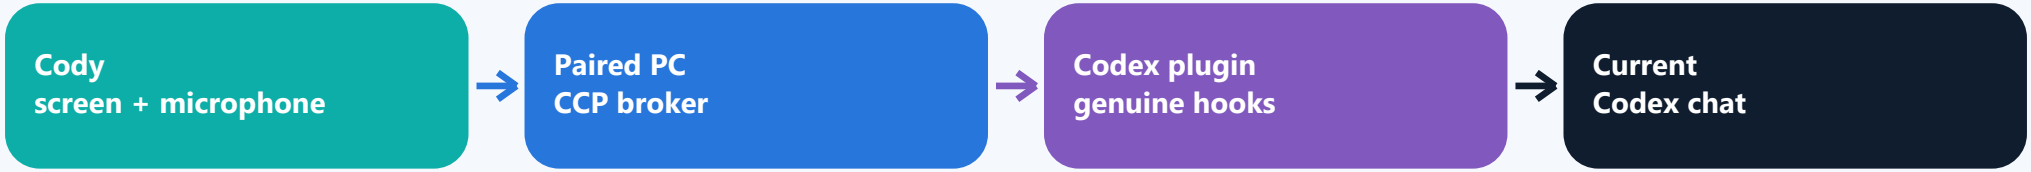

The LAN link carries authenticated device state and commands. Genuine hooks report the followed chat. A separate local Codex App Server reads account usage for Cody.

Pairing

Both sides remember one intended PC. A saved identity alone says nothing about whether it is online.

Presence

Fresh authenticated LAN replies show that the paired PC is reachable now. Internet availability is separate.

Activity

Real Codex hooks identify the followed chat, its current work and when a reply is ready.

02 / DECIDE FROM SAVED STATE

From power-on to Setup

No Wi-Fi?
Provision locally

→

Wi-Fi, no IP?
Reconnect

→

No pairing?
Offer Connect

→

Saved pair?
Find same PC

Only a real IP opens the next step

Keep saved Wi-Fi credentials during a reconnect. A storage error is not an absent profile. The installation QR starts no radio; Bluetooth provisioning begins only when selected.

Setup is reversible


Connect Codex, Network setup and Options are explicit choices. Saying No or Later does not create a pairing request or erase existing settings.

Cody route: Welcome 04-09 → preferences 10/36/11 → pairing 12-15 → connected work 16-20.

Illustrative route map; screen IDs remain stable across PDF revisions.

03 / TWO-SIDED PAIRING

Pair once, prove presence each time

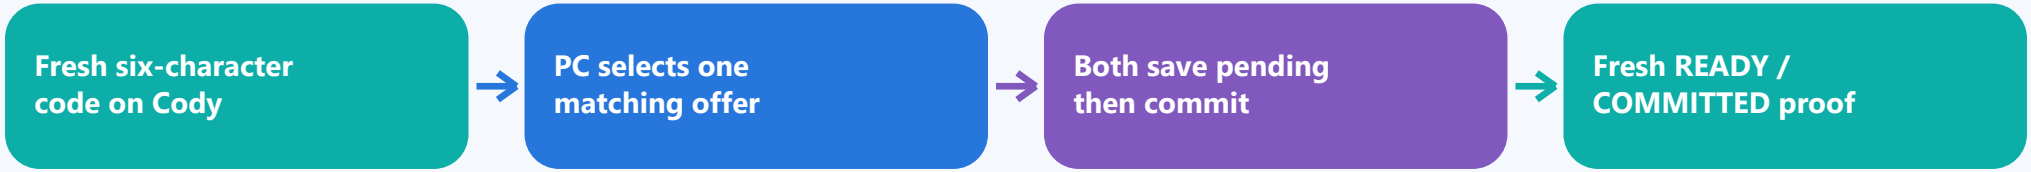

The old link survives a failed replacement

PC candidate: DPAPI. Cody candidate: separate NVS pending record. Promotion follows authenticated proof and durable readback.

Discovery is not connection

FIND alone cannot establish presence, redirect notifications or expose metadata. READY binds a fresh challenge to the observed endpoint. COMMITTED and the signed capability gate account reads.

If there are zero or multiple matching offers, stop with an error. Never pick the first PC; never reuse a code from a screenshot.

04 / EVERYDAY STATE

Work and link are separate

PC connected

Fresh authenticated broker presence. It does not prove a chat is active.

Working

Actual prompt and tool hooks name the followed chat and observed phase.

Reply ready

A Stop hook says the response is available; it does not certify task success.

Working

Example chat title: Improve audio flow

Tokens • Model • Connection • Chat


Codex stats on Cody

Open Options, then Codex stats for reset, quota windows, daily tokens, streaks, credits, vouchers, plan and workspace message count. Token History shows observed 15-minute changes over 1, 5 or 24 hours. Missing intervals stay blank.


Illustrative Home panel, not a device capture. Activity expires after 120 s; PC presence after 8 s without current replies.

05 / REPLY FLOW

A question waits for its real recipient

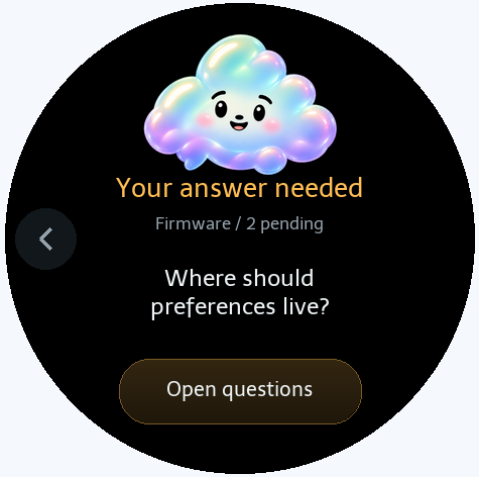


1 / Notice / concept mockup

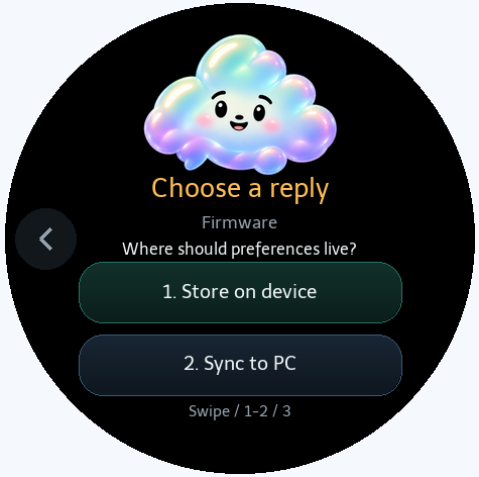

2 / Choose / concept mockup



3 / Review / concept mockup

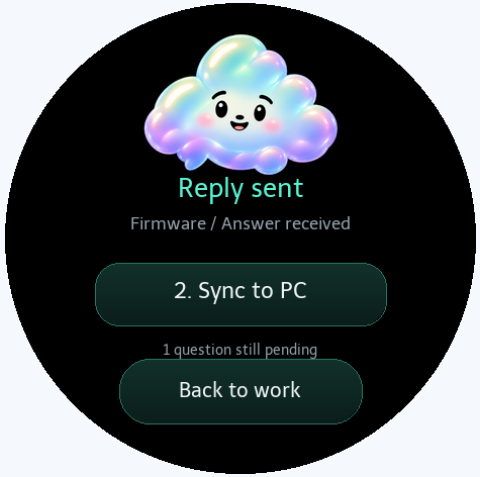

4 / Delivered / concept mockup

Two numbered, full-width choices fit at once; swipe for a third. Tap a choice to read it fully, then Send. A broker receipt is still not delivery: only the recipient's matching answer_id ACK makes it Reply sent.

06 / VOICE FLOW

Record, then decide to send



Voice animation proposal / not a physical capture

A shake or double tap discards Listening. A single tap requests Send. No transcript or audio archive is written to Cody's SD or internal flash.

Prepare — Complete screen visible before input admission.

3, 2, 1 — Countdown; tap cancels before capture.


Listen — AFE supplies real 16 kHz PCM; VAD tracks speech and silence.

5 s quiet — Five acquired silent seconds start Send countdown.

3, 2, 1 — Tap cancels; no END is sent until countdown completes.

07 / CURRENT LIMIT

Audio handoff: where proof stops

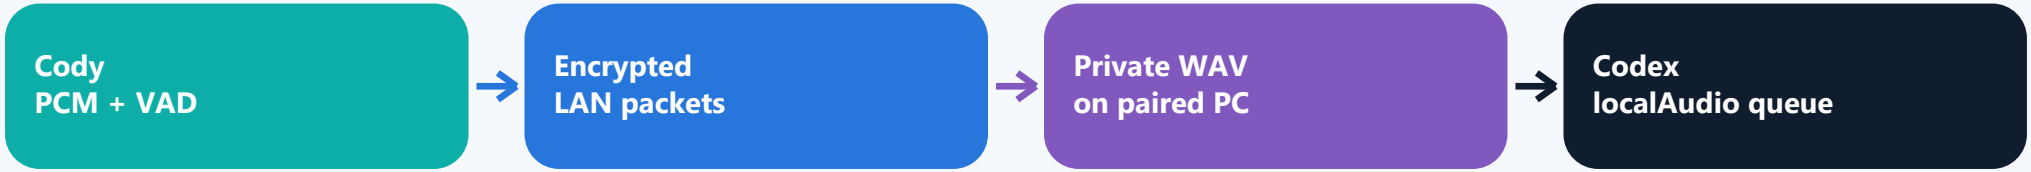

What the pilot proved

A synthetic WAV was admitted to the public experimental queue for this exact chat. It then left that queue.

What this chat actually showed

The received turn said: audio content omitted because audio input is unsupported. Speech was not understood or transcribed.

Do not enable physical voice submission through this path yet. The documented model catalog exposes input modalities; this chat omitted the pilot audio. Desktop Voice is a UI feature, not a documented external-WAV injection point.

08 / CUSTOMER OPERATIONS

What you can ask CCP to do

Connect

Discover the physical Cody; pair with its live code; read retained and current connection; list genuine followed sessions.

Inform

Report actual progress; publish a known notice; ask a bounded question; poll and acknowledge its answer.

Personalize

Read or set preferred name, timezone and quiet hours. Readback confirms a durable change; unsupported values fail.

Inspect or power

Read audio status; show diagnostics in Debug and Release. Tap Memory on Cody for heap details. Restart and factory reset require explicit current intent and confirmation.

The read-only Codex stats dashboard uses the existing pairing and Codex sign-in without extra PC setup. Native approvals remain on the computer. CCP has no arbitrary shell, mount browser, firmware updater, transcript reader or PR action tool.

09 / A SHORT DECISION TREE

Diagnose the right layer

No device IP?
Fix Wi-Fi

→

No authenticated PC?
Check LAN + broker

→

No real chat?
Check hooks

→

No audio reply?
Check model support

Do not erase to fix a disconnect

A missing PC or Internet does not remove saved pairing. Keep the same PC identity and retry discovery. If Codex closes or samples expire, account values become unavailable or stale. The countdown needs a valid device clock.

Keep the evidence levels separate

Queued ≠ consumed; consumed ≠ model-supported; sent ≠ understood. For questions, received ≠ recipient-delivered. A worker ACK ≠ visible pixels.

CCP authenticates ordinary LAN metadata, which is not encrypted. Signed account replies carry bounded metrics and a plan label. Credentials and message bodies stay on the PC. Six-character pairing transcripts remain offline-guessable and PAKE/AEAD is deferred.

10 / WHERE TO LOOK NEXT

Source map and evidence

Packet and device contract

plugins/cody-codex-plugin/protocol/CCP1.md defines fields, order, size and authentication. Firmware owns sensor reads, settings and screens.

PC and Codex integration

CCP owns pairing, hooks, question tickets and audio. The Codex App Server documents model/list and the account, rate limit, usage and workspace message read methods. The PC forwards only the required projections.

Artwork and screen IDs

Question and voice images here are versioned design proposals. Navigation and planning atlases hold detailed UI routes; this PDF keeps the communication journey.

What is actually verified

The audio pilot verified queue admission and removal, then the chat reported omitted audio. Account dashboard behavior is documented from source. Physical display and live App Server behavior still require validation.

Revision register

DATE / TYPE	CHANGE / AFFECTED ORIGINAL PAGES AND SCREENS
2026-10-09 ADDENDUM	**Startup decisions and reversible Setup** Saved Wi-Fi without pairing offers a real Yes/No. Setup can reopen. No/Later writes nothing; saved pairing searches the same PC. Affected: Service 11-13; Connection 15-17; original screens 12-16, 40-42
2026-10-09 ERRATA	**Setup recovery after standby** The old timeout hid Setup. A fresh, stationary hold can reopen it; movement, wake time and busy work cancel. Earlier capture did not test Connect Codex. Affected: Service 14-15; Connection 18-19; screens 04-06, 12, 35B, 41
2026-10-09 ERRATA	**Malformed touch report interrupted rendering** Captured: Yes 16497 ms, Connect Codex 16498 ms, then fifteen FF bytes and ACK=FF at 17112 ms (expected AB). Preserve ESP_ERR_INVALID_RESPONSE; runtime gesture interruption does not prove hardware cause. Affected: Service 17-18; Connection 21-22; screens 12 and 35B
2026-10-10 ADDENDUM	**Notifications, choices and recipient delivery** Question tickets expire within 180 s. Received is not delivered until answer_id ACK; no timeout selects a reply. Historical wire limits remain dated facts. Affected: Service 25-28; Connection 29-32; screens 21-27, 31-32
2026-10-10 ERRATA	**Acknowledgement is admission, not reset completion** Restart preserves settings; factory reset verifies erasure of Wi-Fi, pairing and preferences before reboot. A signed ACK alone proves neither reboot nor wipe. Affected: Service 27-28; Connection 31-32; reset and factory-reset commands
2026-10-11 ERRATA	**English correction retained from both earlier atlases** Earlier Italian headings, captions, copy and footers were translated to English; dates, IDs, artwork meaning and evidence limits were preserved. Affected: Service page 33; Codex Connection page 37
2026-10-12 ADDENDUM	**Operator capabilities, customer tools and Debug boundaries** Inventory customer and Debug operations. Applied ACK is not pixel evidence. No mount browser, arbitrary shell, face override or remote first-boot setter exists. Affected: CCP operator and diagnostic routes; diagnostic screen 38

Revision register

DATE / TYPE	CHANGE / AFFECTED ORIGINAL PAGES AND SCREENS
2026-10-15 ERRATA	**Public audio pilot outcome** The synthetic WAV left the queue, but the Desktop chat displayed that audio content was omitted because audio input is unsupported. Physical voice submission stays disabled. Affected: Audio delivery; original voice screens 28-30

Security

DATE / TYPE	CHANGE / AFFECTED ORIGINAL PAGES AND SCREENS
2026-10-10 SECURITY	**Fresh endpoint-bound proof before current data** A recorded FIND cannot establish presence or obtain current data. READY binds a fresh one-time challenge to observed IP/port; matching COMMITTED gates current metadata and recovery. Affected: Core page 4; FIND / READY / COMMITTED; screens 12-15 and current activity/questions
2026-10-10 SECURITY	**Bound unauthenticated work and retained logs** Device/PC ingress, discovery, verifier work and broker logs have explicit limits. Startup runtime.log growth and real flood/pairing measurements remain separate open evidence. Affected: Core page 10; device worker, PC discovery/pairing, broker ingress and runtime logs
2026-10-10 SECURITY	**Remaining protocol risks are explicit** Six-character transcripts permit offline guessing and ordinary CCP metadata is not confidential. Standard PAKE or high-entropy pairing plus authenticated encryption needs a coordinated redesign. Affected: Pairing verifier/link-key derivation; ACTIVITY / TECH / EVENT; optional HTTP
2026-11-07 SECURITY	**Authenticate bounded account projections** The current paired endpoint, nonce and HMAC gate ALLOWANCECAP, ALLOWANCE and ACCOUNT. Only bounded metrics and plan labels reach Cody. Read-only access, freshness limits, and generation changes prevent stale or cross-account history from appearing current. Affected: Core pages 3 and 9 / physical PDF pages 5 and 11; ALLOWANCECAP / ALLOWANCE / ACCOUNT; original screens 12-15