


## PLAN - FOOTING

SCALE 1:100

PD : 400SQ x 400 DEEP MASS CONCRETE PAD FOOTING.  
TO BEAR ON FIRM NATURAL GROUND WITH A SAFE BEARING CAPACITY OF AT LEAST 150 KPa.

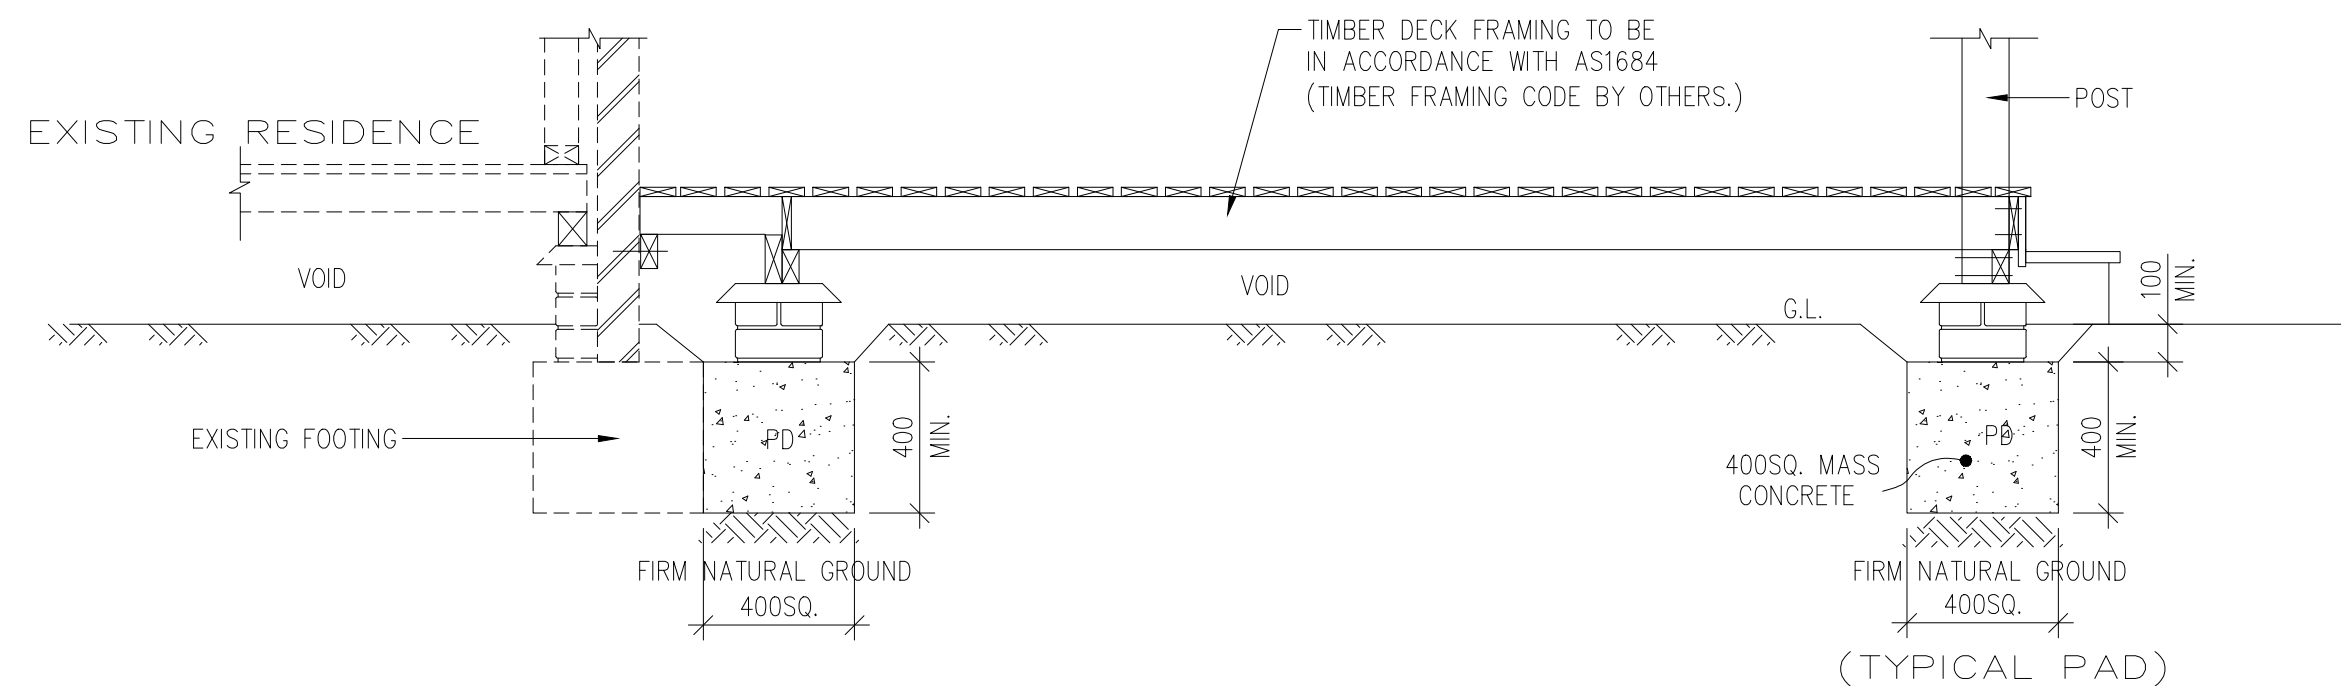

## SECTION A-A

SCALE 1:20

## NOTES:

1. THIS DRAWING TO BE READ IN CONJUNCTION WITH THE ARCHITECTURAL DRAWING AND SPECIFICATION.
2. WORKMANSHIP AND MATERIALS TO COMPLY WITH A.S.3600 AND ASSOCIATED AUSTRALIAN STANDARDS.
3. CHARACTERISTIC CONCRETE COMPRESSIVE STRENGTH IN ACCORDANCE WITH A.S.3600 TO BE 20MPa.
4. CONCRETE SLUMP TO BE 80mm.
5. REINFORCEMENT TO BE SUPPORTED ON PAIRS OF BAR CHAIRS AND BASES SPACED AT 900mm CENTRES
6. GRADE FINISHED GROUND SURFACE TO DIVERT WATER AWAY FROM SLAB ON ALL SIDES AND TO PREVENT PONDING.
7. TERMITE PROTECTION TO BE IN ACCORDANCE WITH A.S.3660.1-1995 AND COUNCIL'S REQUIREMENTS

ISSUE	DATE	APP'D	DESCRIPTION
			REVISIONS



**KNEEBONE & BERETTA CONSULTING** PTY LTD  
CONSULTING STRUCTURAL & CIVIL ENGINEERS  
ABN 43 734 246 264

UNIT 18, 7 ANELLA AVENUE CASTLE HILL NSW 2154  
PH (02) 8850-0799 FAX (02) 8850-1277  
EMAIL: info@kbgconsulting.com WEB: www.kbgconsulting.com



SCALE 1:100 1:20  
DATE 13-10-2015  
DRAWN O.C  
CHECKED MT./E.L.B  
APPROVED *R. Beretta*

CLIENT : CAPE COD AUSTRALIA PTY LTD

PROPOSED ADDITIONS TO RESIDENCE AT  
1A HOLLY STREET, CASTLE COVE  
FOR Mr. A & Mrs. S BHALLA

TIMBER DECK FOOTINGS

DRAWING NUMBER

79516-1

ISSUE