


Room Control Center

User Manual 1.0.1

REAPER monitoring, metering, reference playback and headphone correction

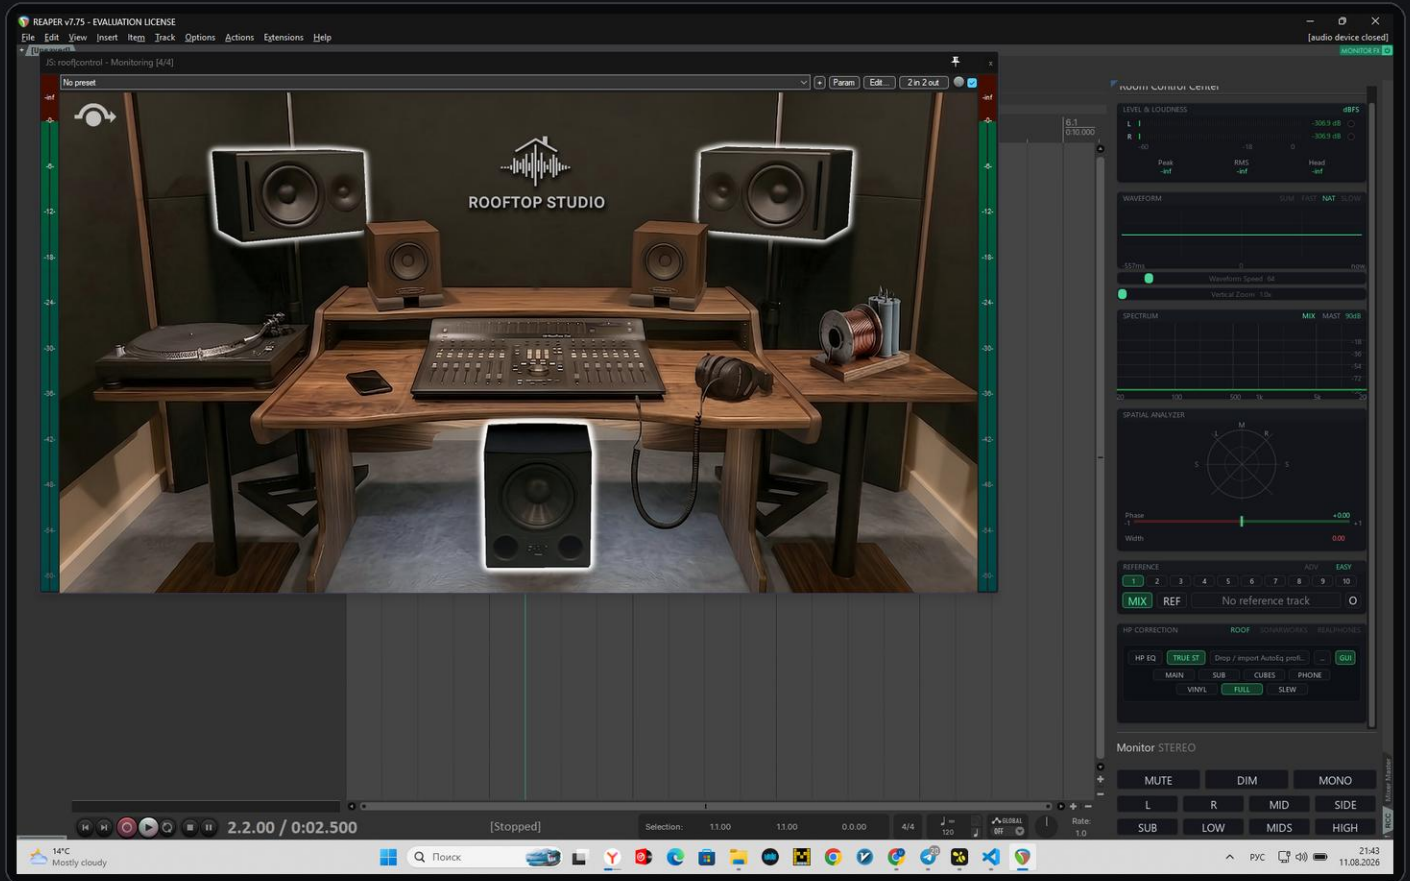

Screenshots captured from REAPER v7.75 on 2026-08-11.

ReaPack URL:

<https://raw.githubusercontent.com/uncleosmixing/ReaScripts/main/index.xml>

1. Purpose And Installation

Room Control Center is a dockable REAPER panel that combines monitoring controls, loudness metering, visual analyzers, reference playback, and headphone correction.

Requirements


- REAPER 7 or newer.
- ReaPack and RealmGui.
- RCC installs helper JSFX/modules into Monitoring FX for analyzer and reference features.
- Roof uses a bundled copy of Roof|control by Ilya-audio / Ilya Kuznetsov (MIT License). Sonarworks and Realphones require their plug-ins in Monitoring FX.

Install With ReaPack

- Open Extensions > ReaPack > Import repositories.
- Add the URL below and synchronize packages.
- Install Room Control Center.lua.
- Run it from the Action List and dock it if desired.

<https://raw.githubusercontent.com/uncleosmixing/ReaScripts/main/index.xml>

2. Main View

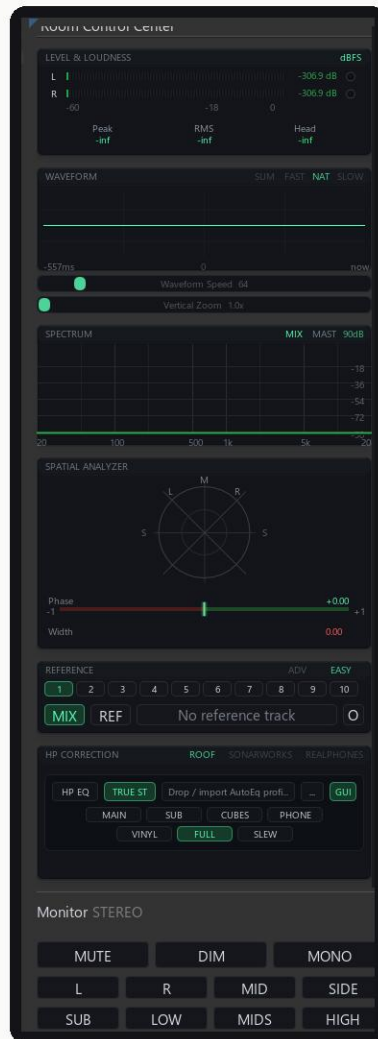


RCC docked on the right: analyzers above, Monitor pinned below.

The analyzer stack scrolls. The Monitor section stays fixed, so MUTE, DIM, MONO, and listen modes remain available.

- Click a module title to collapse or expand it.
- Right-drag module titles to reorder panels.
- If the order changes, a default-order reset appears in the header.
- When RCC has focus, basic REAPER shortcuts are forwarded: Space, Ctrl+S, Ctrl+Z, Ctrl+Y, R.

3. Level & Loudness

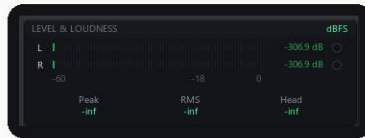

Level & Loudness: L/R meters, peak/RMS/headroom, current dBFS mode.

This panel shows current level, peak hold, RMS or LUFS, and headroom. Colors make clipping and level risk easy to read.

- Right-click the mode label in the top-right corner to choose the metering standard.
- Modes: dBFS, LUFS, Spotify -14, YouTube -14, Apple -16, AES -18, Netflix -27, EBU -23, K-14, K-12, K-20.
- Click the peak/clip readout area to reset peak hold and clip state.
- Streaming and EBU modes show target difference and true peak safety.

4. Waveform And Spectrum



Waveform: signal shape, window speed, and vertical zoom.


- SUM shows a summed waveform; STEREO expands to L/R lanes.
- FAST/NAT/SLOW change the time window.
- Waveform Speed sets the exact divisor; Vertical Zoom changes amplitude magnification.
- Click the graph to toggle compact or expanded view.



Spectrum: MIX mode, 90 dB range, logarithmic frequency grid.

- MIX reacts faster and is useful while mixing.
- MAST is smoother and better for master checks.
- Click 30/40/60/90 dB to cycle the vertical range.
- Hover shows frequency, dB, and nearest note; holding hover for about 3 seconds freezes peak markers.

5. Spatial Analyzer

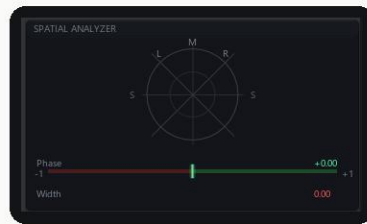


Spatial Analyzer: goniometer, phase/correlation, and width.

Spatial Analyzer helps reveal center energy, side energy, stereo width, and phase risk. Correlation near +1 is generally mono-safe; negative values deserve attention.


- Click the scope to expand the analyzer.
- Right-click for Points/Heatmap, Grid, Labels, Correlation, Width, and Reset.
- Expanded mode exposes Trail and Gain.
- Width highlights unusually narrow or wide material.

6. Reference

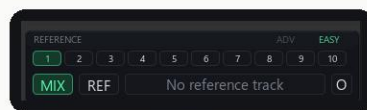

Reference Easy: 10 slots, MIX/REF, and reference track selection.

- Put WAV/AIFF files into Data/ref_tracks inside the REAPER resource path.
- The O button opens the reference-track folder.
- MIX monitors your project; REF monitors the selected reference.
- Right-click a slot number to clear one slot or all slots.

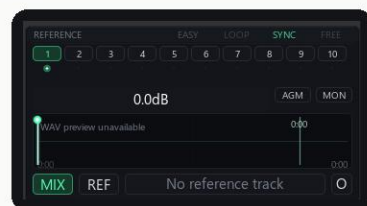

Reference ADV: SYNC/FREE/LOOP, gain, AGM/MON, and reference waveform.


- SYNC locks reference playback to the project timeline.
- FREE plays the reference independently.
- LOOP enables a loop inside the waveform.
- AGM enables auto gain match; MON makes the reference mono.

7. Sample Browser

Sample Browser scans a local sample folder and lets you insert audio files into the current REAPER project without leaving RCC.

- Supported files: WAV, AIFF, FLAC, MP3, and OGG.
- SET chooses the root sample folder by path.
- OPEN opens the current sample folder.
- REC toggles recursive subfolder scanning.
- SCAN refreshes the file list.
- The search field filters by file name or relative folder path.
- INSERT places the selected sample at the current edit cursor.
- Double-clicking a sample also inserts it.
- Right-click the selected sample area to open the file or its folder.

8. HP Correction

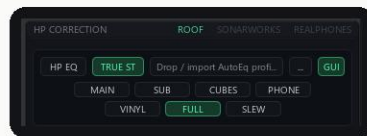

HP Correction in ROOF mode: HP EQ, TRUE ST, AutoEq profile, GUI, and target curves.

HP Correction controls headphone EQ, crossfeed, and external correction systems. In Roof mode, RCC integrates Roof|control by Ilya-audio / Ilya Kuznetsov: RCC bundles the MIT-licensed copy, installs the files into the REAPER Resource Path, and exposes compact controls in the panel.


- Roof|control GitHub: https://github.com/Ilya-audio/roof_control
- Releases: https://github.com/Ilya-audio/roof_control/releases
- Video demo: https://www.youtube.com/watch?v=u_sbqv-6IHA
- Support / Boosty: <https://boosty.to/rooftopstudio>
- AutoEq profiles: <https://autoeq.app>
- License: MIT License, copyright 2026 Ilya-audio.
- HP EQ enables headphone EQ from an AutoEq profile.
- TRUE ST enables crossfeed / true stereo monitoring.
- The profile field accepts AutoEq .txt profiles by drag-and-drop or import.
- GUI opens the Roof|control interface.
- Target curves: MAIN, SUB, CUBES, PHONE, VINYL, FULL, SLEW.



roof_control GUI opened in Monitoring FX next to RCC.

- Sonarworks: add the plug-in to Monitoring FX, then choose SONARWORKS in HP Correction.
- Realphones: add the plug-in to Monitoring FX. RCC controls correction, room, output, limiter, and post-cal metering.
- If an external plug-in is missing, RCC prompts you to add it to Monitoring FX.

9. Monitor

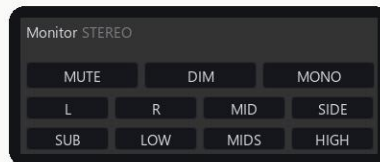

Pinned Monitor section: global listening checks.

- MUTE disables monitoring.
- DIM temporarily lowers monitor level.
- MONO checks mono compatibility.
- L/R/MID/SIDE isolate channel or mid/side listening modes.
- SUB/LOW/MIDS/HIGH isolate frequency bands for quick diagnosis.

10. Quick Workflows

Check A Master Before Export

- Choose the correct target in Level & Loudness.
- Reset peak hold and clip state.
- Play the loudest section.
- Check headroom, clipping, and target difference.

Compare A Mix Against A Reference

- Add WAV/AIFF files to Data/ref_tracks.
- Choose a slot and file in Reference.
- Toggle MIX and REF.
- Enable AGM in ADV mode for loudness-matched comparison.

Set Up Headphone Correction

- Open HP Correction and select ROOF.
- Import an AutoEq .txt profile.
- Enable HP EQ and TRUE ST.
- Choose the target curve for the monitoring task.

11. Troubleshooting

- DAW Engine Stopped / Analyzer Tap Inactive: click Install / Run Analyzer Tap.
- Empty analyzers: check the audio engine and Monitoring FX.
- Empty reference list: add WAV/AIFF files to Data/ref_tracks using the O button.
- Sonarworks/Realphones missing: add the matching plug-in to Monitoring FX.
- Roof GUI can stay open while RCC remains docked.