

Vinyl cutter guide



Figure 1: Our vinyl cutter

Theory



Figure 2: Uppsala Makerspace

Contents

Foreword	2
1. Install Inkcute	3
2. Setup Inkcute	4
3. Get T-shirts	5
4. Get vinyl	6
5. Connect the vinyl cutter	7
6. Setup the vinyl cutter	8
7. Place foil on the vinyl cutter	9
8. Set up Inkcute connection	10
9. Use Inkcute	11
10. Set up heat press	13
11. Peel vinyl	14
12. Transfer vinyl to T-shirt	15

Foreword

This is a book about using the laser cutter at the Uppsala Makerspace.

About this book

This book has a CC-BY-NC-SA licence.



Figure 1: Licence for this book

(C) Richèl Bilderbeek and all contributors

You can do whatever you like with this book, as long as you give proper credit to us and/or mention the website https://uppsala-makerspace.github.io/vevor_vinyl_cutter_to_t_shirt_manual/.

This guide will always be free (as in beer) and free (as in freedom).

1. Install Inkcute

Inkcute is a program to send things to cut to the vinyl cutter. It works under Linux, Mac and Windows. This guide shows how to do this for Linux.

1.1 Start a terminal

On a Linux computer, start a terminal:

- Press the Meta/Windows key (between Ctrl and Alt at the bottom left of the keyboard)
- Type `terminal`

Now you have started a terminal

1.2 Install the Debian packages

Copy-paste the following command to the terminal:

```
sudo apt-get install python3-pip python3-pyqt5 python3-setuptools
```

Probably you will need to type a password and press enter.

You will probably be asked if you want to install these programs. Type 'Y' and press enter.

You will see a lot of programs being installed.

Well done!

Now repeat with this command:

```
sudo apt-get install libcups2-dev python3-pyqt5.qtsvg
```

1.3 Create a virtual environment for Inkcute

Create a (mandatory!) virtual environment for Inkcute:

```
python3 -m venv ~/inkcut_venv
```

1.4 Install Python packages in the virtual environment

Install the Inkcute and PyQt5 Python packages in the virtual environment"

```
~/inkcut_venv/bin/pip install inkcute PyQt5
```

1.5 Start Inkcute

Now you can start `inkcut` with:

```
~/inkcut_venv/bin/inkcut
```

Inkcute is now started. Well done!

2. Setup Inkcute

2.1 Start a terminal

On a Linux computer, start a terminal.

2.2 Add yourself to the dialout group

Add yourself to the dialout group:

```
sudo usermod -a -G dialout "$USER"
```

2.3 Reboot the computer

Reboot the computer.

3. Get T-shirts

Get one or more T-shirts.

Company	Address	Price	Description
Lager 157	Kungsgatan 95	30	Has S, M, L and XL
New Yorker	Marknadsgatan 1	79	?All sizes

- Price is in kroner per (cheapest) T-shirt

4. Get vinyl

Get suitable vinyl

Suitable foil looks like this:



Figure 2: Transfer foil ready for transfer



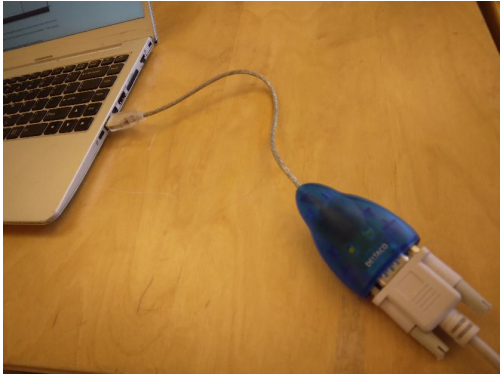
- The foil feels smoother than a sticker ('klistermärke')
- The foil is shinier than a sticker

Places to buy vinyl:

Place	Features
https://folier.se/ https://www.scandraft.se/	Recommended by a member Sells our favorite Siser P.S. Film Easyweed in 25 meter rolls for 2500 kr

5. Connect the vinyl cutter

Plug in the correct USB cable from the vinyl cutter to your computer:

Vinyl cutter side	Center	Computer side
		

6. Setup the vinyl cutter



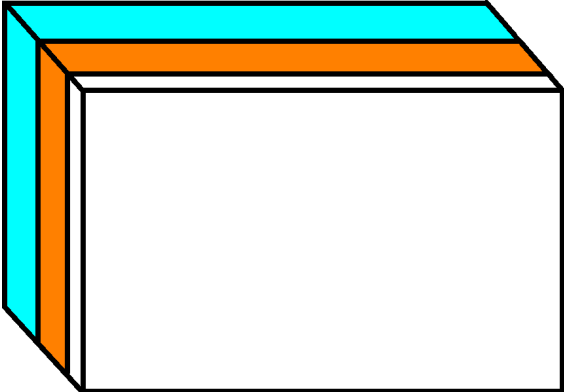
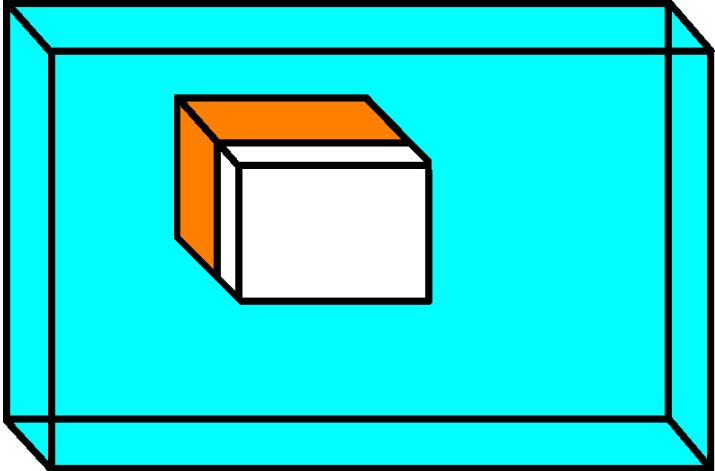
The vinyl cutter has three parameters:

- Origin: the bottom-left of the cut, move the red dot to the bottom-left of the vinyl
- Speed: the speed of the blade
 - If the speed is too high, no idea what happens. Please contribute if you know!
 - If the speed is too low, the process takes needlessly longer
- Force: how much force the blade applies to the vinyl
 - If the force is too high, the cutter will go through the vinyl
 - If the force is too low, the vinyl cannot be removed easily

Vinyl	Speed (mm/s)	Force(g)	Recommendation source
Siser P.S. Film	20	120	Trying out, works!
Siser P.S. Film	300	60	manual

7. Place foil on the vinyl cutter

Place the foil on the vinyl cutter, with the white side up, i.e. with the thick and transparent plastic at the bottom.

View	Before cutting	After cutting
Slice		
Isometric		

Structure of the foil and what will be cut away. Light-blue: thick, transparent layer, do not cut, can be separated from orange layer by hand. Orange: the color of the print. White: the glue connecting the print to the T-shirt

The knife cuts the white and colored layer only. The thick and transparent layer needs to remain intact.

8. Set up Inkcute connection

In Inkcute, go to the 'Configure device | Connection':

- Type: Serial port
- Port: `tttyUSB0`. If you cannot select `tttyUSB0`, you've used the wrong USB cable coming out of the vinyl cutter :-)
- Baudrate: 38400

The screenshot shows the 'Configure device — Inkcute' window. On the left, under 'Configure device', there is a list of 'Available Devices' containing 'Our own Vevor'. Below this list is an 'Add' button. On the right, there are tabs for 'General', 'Device', 'Connection', 'Protocol', and 'Filters'. The 'Connection' tab is selected. It contains the following settings: 'Type' is set to 'Serial Port'; 'Port' is set to '/dev/ttyUSB0 - FT231X USB UART - FT231X USB UART' with a 'Refresh' button; 'Baudrate' is set to '38400'; 'Bytesize' is set to '8'; 'Parity' is set to 'None'; 'Stopbits' is set to '1'; and 'Flow control' has three unchecked checkboxes: 'RTS/CTS', 'DSR/DTR', and 'XON/XOFF'. At the bottom left, it says 'Activated Device: Our own Vevor'. At the bottom right, there are 'OK' and 'Cancel' buttons.

Figure 3: Use the serial port with a baudrate of 38400

Use the serial port with a baudrate of 38400. If you cannot select `tttyUSB0`, you've used the wrong USB cable coming out of the vinyl cutter

9. Use Inkcute

9.1 Load an SVG

In Inkcute, load an SVG.

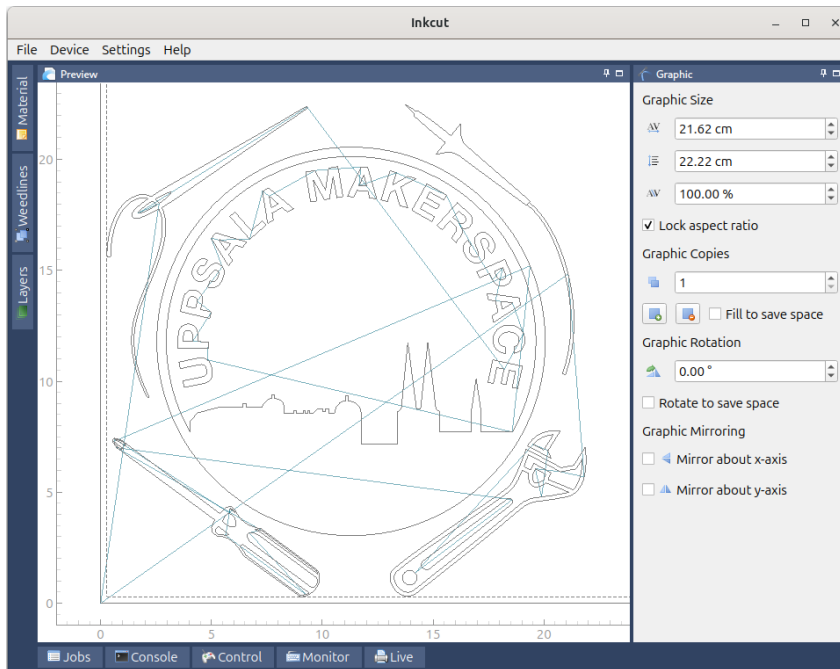


Figure 4: Inkcute in action

9.2 Mirror the image

Click on 'Mirror y-axis' (at the bottom-right of the screen) to mirror the image horizontally. This is especially important for letters.

9.3 (optional) Set up multiple images correctly

For many copies, do as shown here:

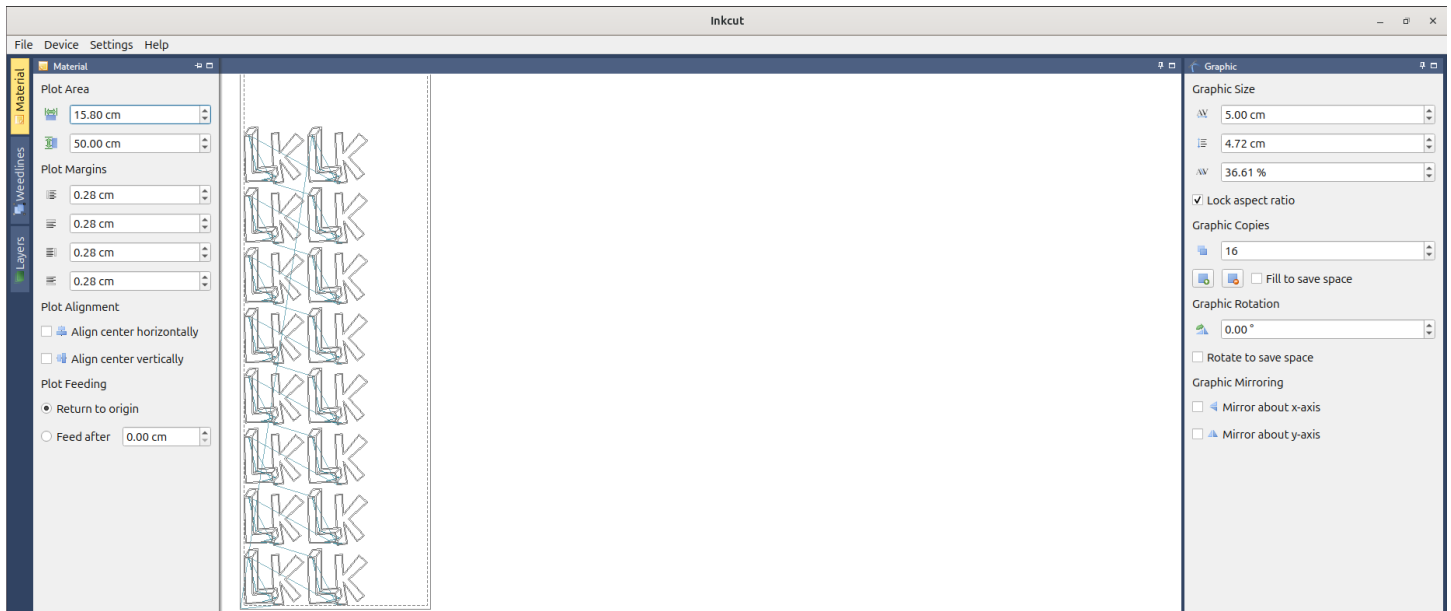


Figure 5: Do many copies like this

9.4 Start the cut

Click on ‘Device | Send to device’ to start the vinyl cutter.

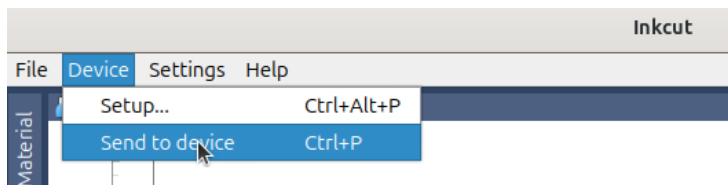


Figure 6: Click on ‘Device | Send to device’ to start the vinyl cutter

Click on ‘Device | Send to device’ to start the vinyl cutter

10. Set up heat press

Set up the heat press to have the correct temperature and time.

Vinyl	Temperature (C)	Time (s)	Recommendation source
Siser P.S. Film	180	10	Trying out, works!
Siser P.S. Film	150	15	manual

11. Peel vinyl

You now have vinyl with your pattern cut out.



Figure 7: Vinyl with a pattern cut out

Remove all the vinyl that should **not** be on the T-shirt. Use your favorite tools for this.

In the end, this how your vinyl looks lik after peeling:



Figure 8: Vinyl after peeling

12. Transfer vinyl to T-shirt

Put the remainder of the foil on the T-shirt, with the colorful side up:



Figure 9: Vinyl to be transferred to T-shirt

Confirm the heat press is warmed up: it's temperature should match the desired temperature.

Place the T-shirt under the press, with the foil still at the desired location on the t-shirt.

When the heat press is warmed up, lower the press. After the time you've set up in an earlier step, the press will start to beep. Raise the press again.

Wait for the print to cool off.

Peel off the transparent layer from the shirt:



Figure 10: Vinyl transferred to T-shirt

Done!