

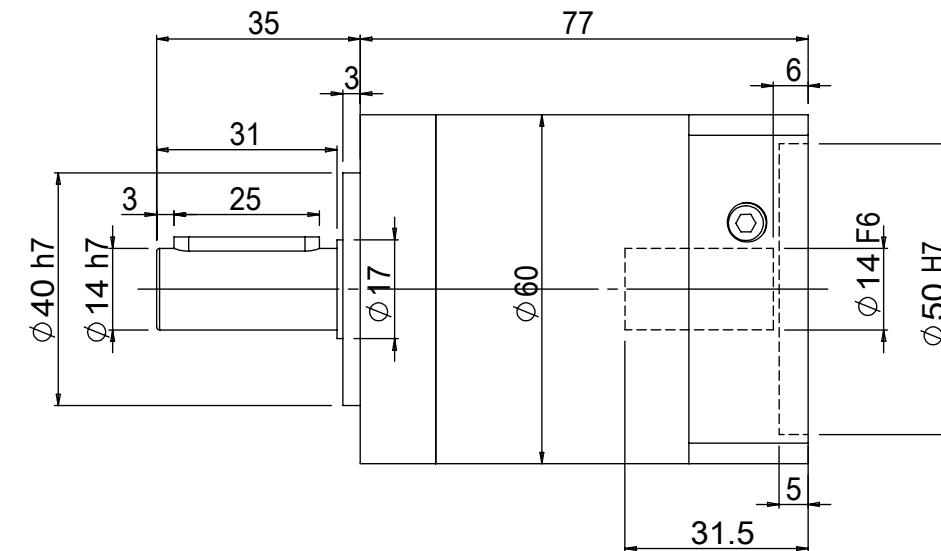


A

輸出端(output)

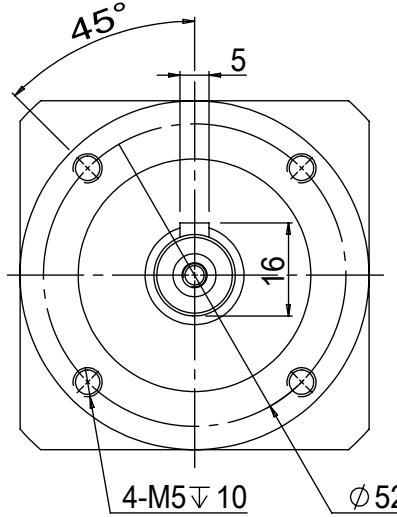

輸入端(input)

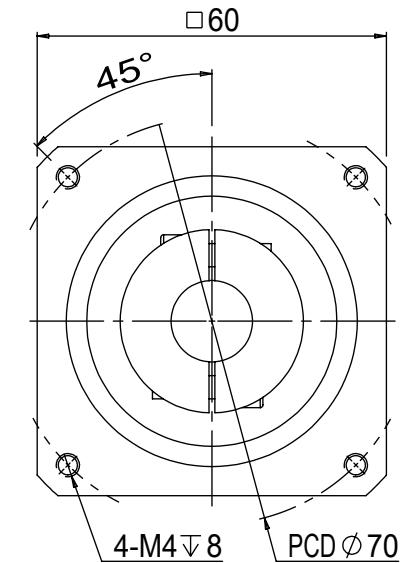

B

C

D

A

B

C

| | |
|---|---|
| 急停扭矩 (Emergency Stop Torque) | 2倍額定輸出力矩 (2 times rated output torque) |
| 額定輸入轉速 (Rated input speed) | 3000rpm |
| 背隙 (Dorsal gap) | ≤8arcmin |
| 容許徑向力 (Allowable radial force) | 400N |
| 容許軸向力 (Allowable axial force) | 300N |
| 使用壽命 (Service life) | 20000h |
| 效率 (Efficiency) | ≥96% |
| 使用溫度範圍 (Operating temperature range) | -25°C~80°C |
| 防護等級 (protection class) | IP65 |
| 安裝方式 (Installation DIRECTION) | 任意(Arbitrarily) |

| 減速比 (Speed ratio) | 3 | 4 | 5 | 7 | 10 |
|---------------------------------|--------|--------|--------|--------|------|
| 額定輸出力矩 (Rated output torque) | 15.8Nm | 25.5Nm | 27.5Nm | 19.2Nm | 12Nm |

| | | | | |
|-----------|-------------|-------------------|----------|------------|
| --- | 2018-12-26 | 00初版 | 陳國棟 | |
| 改版 SYM | 年月日 DATE | 變更事項 REVISIONS | 設計 BY | 備注 NOTE |

| | | | |
|---|----------------|--------------|---|
| 制圖 PRAWN | 設計 DESIGNED | 品名: TITLE | 精密行星減速機 Precision Planetary Gear Reducer |
| | | 規格: SPEC | GPL060-L1-(14-50-70-M4) |
| G+ ® 吉嘉精密科技有限公司 GIGA Precision Technology Co., Ltd | | | A4 |