


INSTRUMENT
APPROACH
CHART - ICAO

AERODROME ELEV 361
HEIGHTS RELATED TO
THR RWY 04R - ELEV 355


DEBRECEN TOWER	125.910
DEBRECEN INFO	125.910
BUDAPEST INFORMATION (EAST)	133.000

DEBRECEN
RNP RWY 04R
(ACFT CAT A, B, C, D)

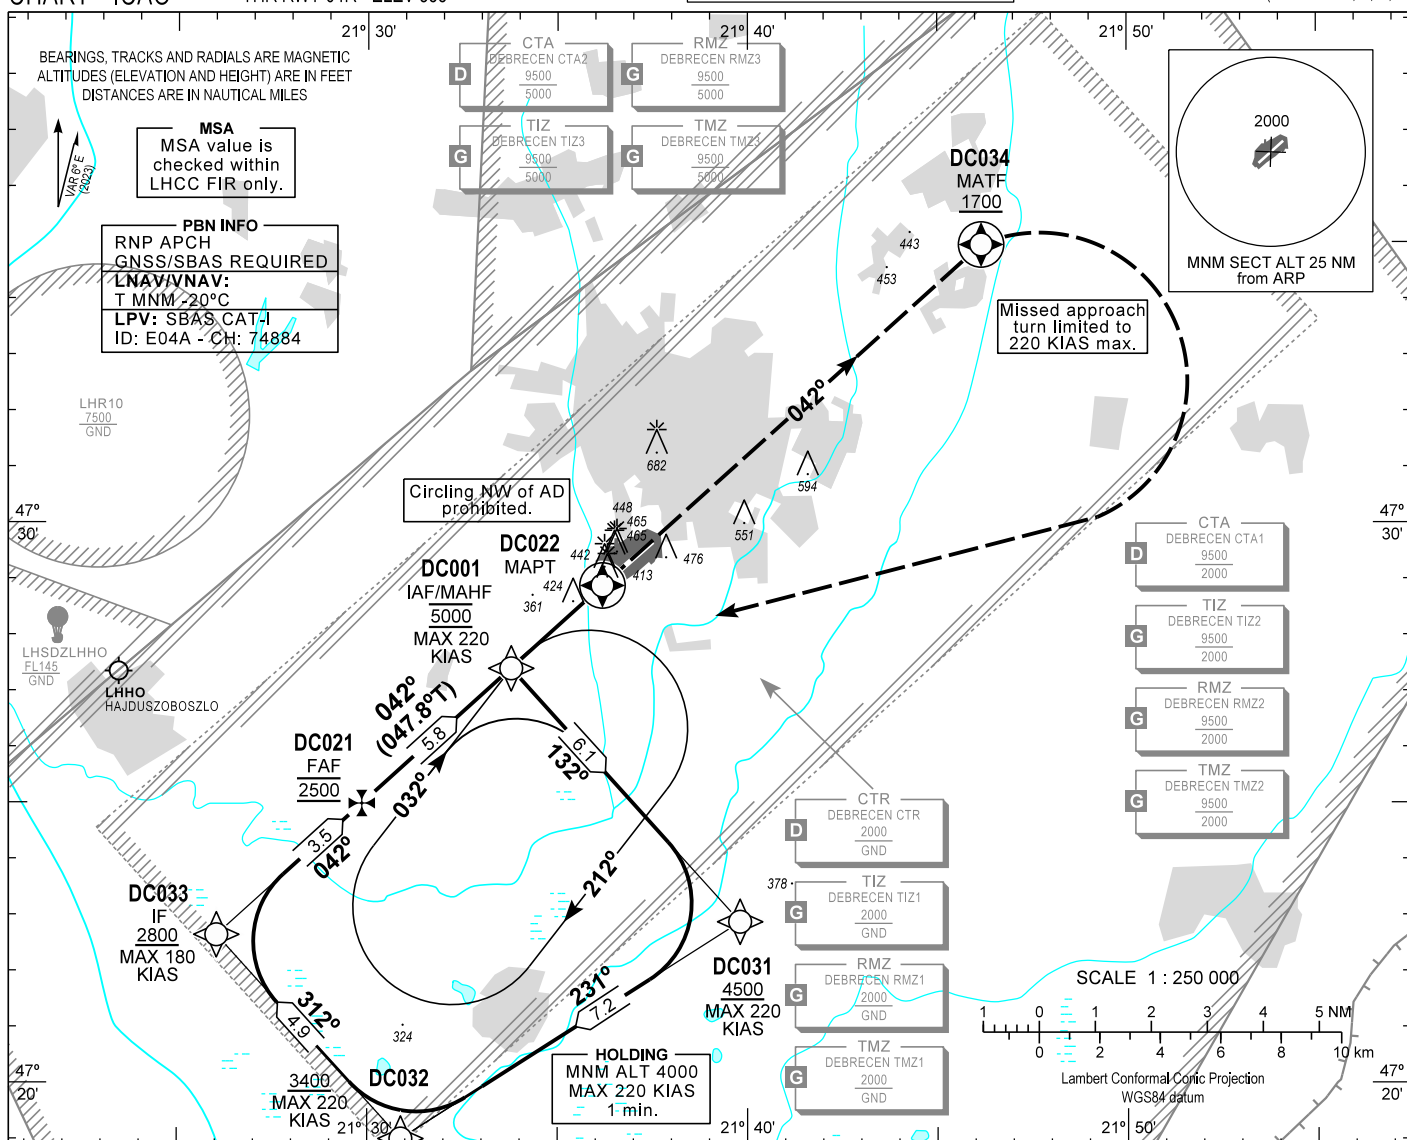

TRANSITION ALTITUDE
10000

MISSED APPROACH
Climbing straight ahead to 4000.
Reach at least 1700 by DC034 and turn right direct DC001.
Missed approach turn limited to 220 KIAS maximum.
Proceed to DC001, and enter holding at 4000,
or follow basic procedure according to ATC.

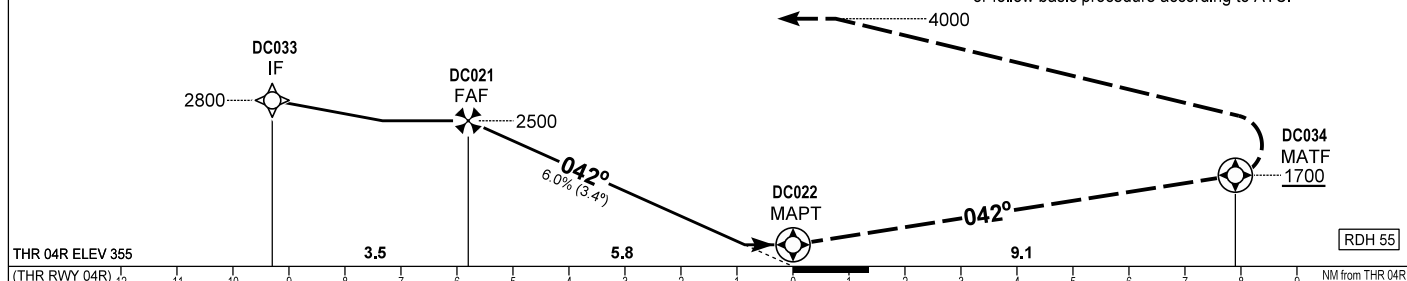

CHANGE: SBAS FAS Data Block

OCA (OCH)		A	B	C	D	DIST THR / RWY 04R		NM	5.0	4.0	3.0	2.0	1.0	
STRAIGHT-IN APPROACH	LNAV	670 (310)	670 (310)	680 (320)	690 (330)	ALTITUDE		ft	2230	1870	1500	1140	770	
	LNAV/VNAV	578 (223)	591 (236)	625 (270)	636 (281)	Timing not authorized to define the MAPt.								
	LPV	550 (195)	562 (207)	573 (218)	584 (229)									
CIRCLING APPROACH SE of AD only		ft AMSL	850	860	990	1050	GROUND SPEED		kt	60	90	120	150	180
		VIS. m	1900	2800	3700	4600	FAWP - MAWP 5.79 NM		MIN:sec	5:48	3:51	2:54	2:19	1:56

AD 2 LHDC INSTRUMENT APPROACH CHART RNP RWY 04R

Only aircraft, equipment and aircrew **approved by the State of the Operator** to carry out GNSS approaches, may use the procedure.

PT	WP ID	Role	OverFly	Bearing/ (Len Dur)	Turn Direction	Altitude (FT)	IAS (KT)	VRT ANG	NAV PERF
IF	DC001	IAF				@5000	-220		RNP APCH
TF	DC031			137.9 T/6.1 NM		+4500	-220		RNP APCH
TF	DC032			237.4 T/7.2 NM		+3400	-220		RNP APCH
TF	DC033	IF		317.9 T/4.9 NM		+2800	-180		RNP APCH
TF	DC021	FAF		047.8 T/3.5 NM		@2500			RNP APCH
TF	DC022	MAPT	Y	047.8 T/5.8 NM		+700		-3.4°	RNP APCH
TF	DC034	MATF	Y	047.9 T/9.1 NM		+1700	-220		RNP APCH
DF	DC001	MAHF			R	@4000	-220		RNP APCH
HM	DC001			038.0 T/1 min	R	@4000	-220		RNP APCH

SBAS FAS Data Block Coding Data

FAS-DB (CRC wrapped data)	
Operation type	0
SBAS Provider	1 (ENGOS)
Airport identifier	LHDC
Runway	04R
Approach Performance Designator	0
Route indicator	
Reference Path Data Selector	0
Reference Path Identifier	E04A
LTP/FTP Latitude	472853.0100N
LTP/FTP Longitude	0213610.8700E
LTP/FTP Ellipsoidal Height (m)	149.2
FPAP Latitude	472947.3095N
FPAP Longitude	0213739.4325E
Threshold Crossing Height	55
TCH Units Selector	0
Glidepath Angle (degrees)	3.40
Course Width (m)	105.00
Length Offset (m)	0
HAL (m)	40.0
VAL (m)	35.0
Data Block	10 03 04 08 0C 44 00 00 01 34 30 05 24 76 60 14 EC 60 45 09 D4 19 37 A8 01 E5 B3 02 26 02 54 01 64 00 C8 AF 58 36 6F 30
Calculated CRC Value	58366F30
FAS-DB (not CRC wrapped data)	
ICAO Code	LH
LTP/FTP Orthometric Height (m)	108.2

WAYPOINT COORDINATES

WP ID	Latitude	Longitude
DC001	N47 27 24.2	E021 33 46.9
DC031	N47 22 52.9	E021 39 48.3
DC032	N47 19 00.5	E021 30 53.1
DC033	N47 22 38.8	E021 26 02.3
DC021	N47 24 59.7	E021 29 51.3
DC022	N47 28 53.0	E021 36 10.9
DC034	N47 34 58.0	E021 46 09.8
DC001	N47 27 24.2	E021 33 46.9

Holding procedure

Holding fix: DC001
Right hand holding pattern.
Maximum speed: 220 KIAS
Inbound track: 032°
Outbound track: 212°
Rate of turn: 3°/sec. or 25° bank angle
(whichever requires lesser bank)
Outbound times: 1 min.
Minimum holding altitude: 5000
4000 for Missed Approach

Final approach descent: 3.40°