

Fault Code: Multiple A


Multiple Fault Code A

 Printable Version

Overview

Codes	Reason	Effect
Fault Code: Multiple PID(P): SPN: FMI: Lamp: SRT: 00-517	Sensor power supply A01 is shorted to +24 VDC.	Multiple sensor Fault Codes 156, 212, and 694 simultaneously occur.

©Cummins Inc

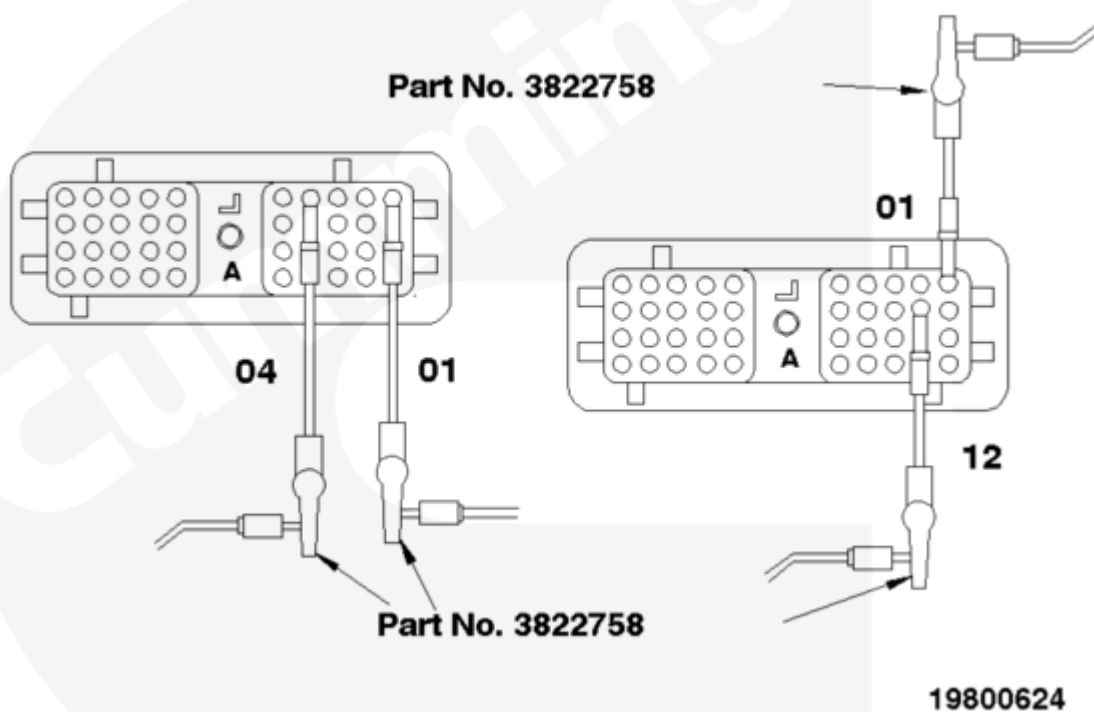

Multiple Fault Code A

Circuit Description

The electronic control module (ECM) supplies sensors on the CENSE™ harness with +5 VDC from either pin 01 or pin 02 on the ECM A connector. A failure on this circuit will cause multiple fault codes.

Component Location

Consult the engine diagrams. Circuits that have an extension/sensor harness in addition to the main harness are to be tested and inspected as part of the “main harness.”

Shoptalk

Look for open circuits, short circuits, or shorts to ground in the supply or return wires, or a defective ECM power supply.

A failed pressure sensor can cause multiple active fault codes to go inactive once the engine has been started.

Refer to Troubleshooting Fault Code t05-mfc01 (</qs3/pubsys2/xml/en/procedures/81/81-t05-mfc01.html>)