


Trainings ▾

General Information

⚠ CAUTION ⚠

Incorrect or insufficient break-in of the piston rings will lead to early oil consumption or high blowby complaints. Adherence to these run-in guidelines will allow the full durability of new pistons, liners, and rings to be realized.

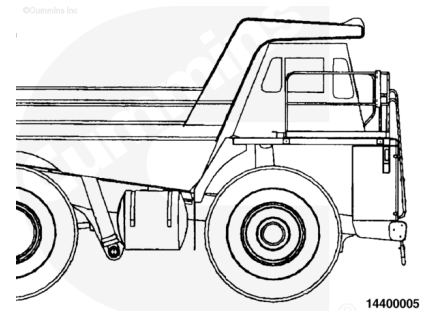

This section outlines engine testing and engine run-in recommendations for QSK23 engines. All engines **must** be run-in after a rebuild or a repair involving the replacement of one or more piston ring sets, cylinder liners or pistons.

Before running the engine, make sure the engine is filled with the proper coolant. Also, make sure the lubricating oil system is filled and primed.

In Service Run-in

The following in-service run-in guidelines are recommended for QSK23 engines after a repair involving replacement of one or more of the piston ring sets, cylinder liners, or pistons where an engine dynamometer and/or chassis dynamometer run-in can **not** be performed.

The majority of heavy duty diesel applications will provide sufficient run-in under normal loaded operations. However, light load/high rpm operation **must** be avoided during the run-in period.

Engine Dynamometer Run-in

This is the preferred method of run-in for engines that have been rebuilt out-of-chassis. It is **not** practical, or recommended that an engine be removed from the application to conduct the run-in after a rebuild or cylinder repair has been performed in-chassis. There is no requirement, or is it recommended for an

engine that has been through run-in and tested on an engine dynamometer to be run-in again after it has been installed in the vehicle or equipment.

©Cummins Inc.

Chassis Dynamometer, Portable Dynamometer, or Load Bank Run-in

When it is **not** possible to load an engine immediately after rebuild or repair due to the following:

©Cummins Inc.


- A standby generator
- A fire pump that can **not** be operated because of customer restrictions

The engine **must** be run-in on a chassis dynamometer, portable dynamometer, or load bank following the recommendations outlined in this section.

Fuel Flow Measurement on Engine or Chassis Dynamometer

Accurate fuel flow measurement is important for evaluation of engine performance and troubleshooting on an engine or chassis dynamometer. The **only** way accurate fuel flow measurement can be obtained is through proper use of available equipment. Below is a description of the fuel measuring device, available from Cummins Inc., along with installation and operation recommendations. The fuel measuring device, Part Number 3376375, can be used with a chassis or engine dynamometer.

©Cummins Inc.



eg8togf


Install

When installing the fuel measuring device, it is important to reduce the amount of air that can be introduced into the system when the device is **not** in use. Therefore, the plumbing

used **must** include non-restrictive shutoff valves, such as ballcock valves, to contain fuel in the device after each use.

Additional installation considerations are:

- The fuel measuring device, Part No. 3376375, **must** be mounted vertically to ensure accuracy and proper operation.
- A separate fuel supply for use on the dynamometer is recommended. All fuel used in the measuring device **must** be clean for consistent operation.
- Care **must** be taken to reduce fuel line restriction **to** and **from** the engine. Minimum recommended hose sizes are number 10 for the engine fuel inlet, and number 8 for the engine fuel drain. The length of either hose **must not** exceed 15 feet.
- For accurate fuel consumption or flow measurement while testing on a chassis dynamometer, it is recommended to use a fuel cooler to maintain inlet temperature to the fuel gear at 49°C [120°F] or below.




eg8togf


Theory of Operation

This is a schematic of the fuel measuring device, Part No. 3376375. The device consists of the following components:

- Fuel Filter
- Flowmeter
- Float Tank
- Fuel Rail Pressure Gauge
- Fuel Cooler is **not** a part of fuel measuring device, Part Number 3376375, however it **must** be used when conducting test with the flow meter.

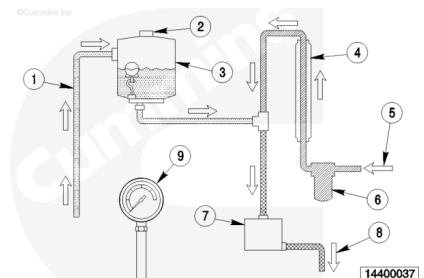

The fuel measuring device recirculates return fuel to the engine fuel inlet by routing the return fuel to the top side of the float tank. The fuel is deaerated as it passes through the baffling in the float tank. A ball float valve at the bottom of the float tank maintains an adequate volume in the tank for deaeration. The fuel is then returned to the engine fuel inlet. Refer to the sketch for fuel line connection points on the fuel measuring device.

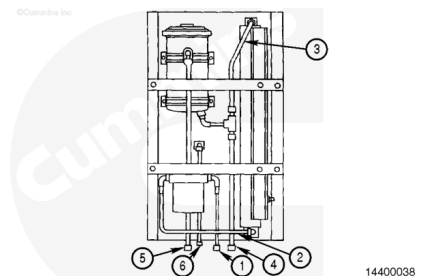

1. Fuel Supply from Tank

2. Fuel Flow to Fuel Meter
3. Fuel Flow from Fuel Meter
4. Fuel Flow to Fuel Cooler
5. Injector Return Fuel
6. Fuel Rail Pressure

Note : The fuel supply tank **must** be below the level of the fuel measuring device to prevent overflow of the float tank. If an overhead fuel supply tank is used, a float controlled reservoir **must** be installed between the fuel supply tank and the fuel measuring device, and below the level of the device.

The fuel measuring device is installed in series between the fuel supply tank and the engine fuel inlet. The quantity of fuel being drawn through the flowmeter is known as makeup fuel or the amount of fuel being burned by the engine.

The flowmeter is graduated to read fuel flow in pounds per hour. The flowmeter contains two floats with respective scales on either side of the flowmeter. The small float is used to measure lower flows and **must** be read on the left scale, as shown. The larger float is for measuring higher flows and **must** be read on the right scale.

To obtain an accurate fuel rate measurement, the flowmeter reading **must** be corrected based on the fuel temperature. There is a fuel temperature gauge on the front panel of the fuel measuring device. The gauge is graduated in percent of error by which the reading requires correction. An example is: The fuel of an engine reads 125 lbs/hr on the flowmeter, and the temperature gauge reads plus 2 percent; the corrected fuel flow rate will be 125 plus 2 percent, or 127.5 lbs/hr.

