

Trainings ▾

Specifications

Oil Pressure at Idle (minimum allowable at 93°C [200°F] oil temperature)	103 kPa [15 psi]
Oil Pressure at No-Load Governed Speed (automotive and industrial only)	155 to 324 kPa [22.5 to 47 psi]
Pressure Drop Across Oil Filter (maximum allowable with 15W40 oil at operating temperature)	172 kPa [25 psi]


The lubricating oil change fill volume is the amount of lubricating oil added if the lubricating oil pan has been fully drained for a service event, then refilled for operation. Lubricating oil fill volumes are unique to the installed lubricating oil dipstick of the engine being serviced.

If the lubricating oil change fill volume is **not** known:

- Contact a Cummins® Distributor/Dealer
- Determine the capacity of the lubricating oil pan option for the engine being serviced by using QuickServe™ Online (QSOL) and the engine serial number.
- Fill the lubricating oil pan to the smallest lubricating oil pan capacity listed for the engine being serviced. Add 0.95 liters [1 U.S. qt] of lubricating oil at a time until the lubricating oil reaches the high mark on the lubricating oil dipstick. Record the number of liters/quarts or lubricating oil added, so the lubricating oil capacity is known the next time the lubricating oil is drained.


Steel and Rear Sump Style

Lubricating Oil Pan Capacity		Lubricating Oil Filter Capacity	Total Lubricating Oil Capacity
Low	Maximum		
37.9 liters [10.0 U.S. gal]	49.2 liters [13.0 U.S. gal]	2.2 liters [0.6 U.S. gal]	54.5 liters [14.4 U.S. gal]

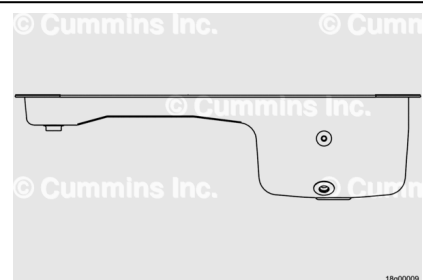

Steel and Front Sump Style

Lubricating Oil Pan Capacity		Lubricating Oil Filter Capacity	Total Lubricating Oil Capacity
Low	Maximum		
37.9 liters [10.0 U.S. gal]	49.2 liters [13.0 U.S. gal]	2.2 liters [0.6 U.S. gal]	54.5 liters [14.4 U.S. gal]

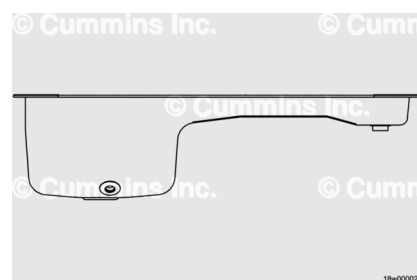


Aluminum and Rear Center Sump Style

Lubricating Oil Pan Capacity		Lubricating Oil Filter Capacity	Total Lubricating Oil Capacity
Low	Maximum		
36 liters [9.5 U.S. gal]	43.5 liters [11.5 U.S. gal]	2.2 liters [0.6 U.S. gal]	48.8 liters [12.9 U.S. gal]




Aluminum and Rear Center Sump Style

Lubricating Oil Pan Capacity		Lubricating Oil Filter Capacity	Total Lubricating Oil Capacity
Low	Maximum		
36 liters [9.5 U.S. gal]	43.5 liters [11.5 U.S. gal]	2.2 liters [0.6 U.S. gal]	48.8 liters [12.9 U.S. gal]

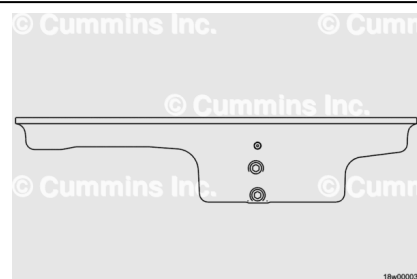


Aluminum and Front Center Sump Style

Lubricating Oil Pan Capacity		Lubricating Oil Filter Capacity	Total Lubricating Oil Capacity
Low	Maximum		
36 liters [9.5 U.S. gal]	43.5 liters [12.5 U.S. gal]	2.2 liters [0.6 U.S. gal]	52.6 liters [13.9 U.S. gal]

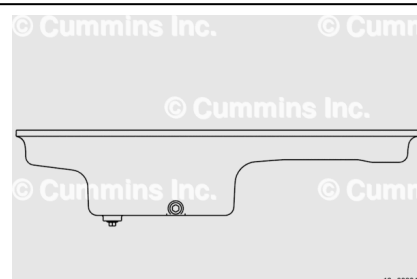

Aluminum and Rear Center Sump Style

Lubricating Oil Pan Capacity		Lubricating Oil Filter Capacity	Total Lubricating Oil Capacity
Low	Maximum		
36 liters [9.5 U.S. gal]	43.5 liters [12.5 U.S. gal]	2.2 liters [0.6 U.S. gal]	52.6 liters [13.9 U.S. gal]

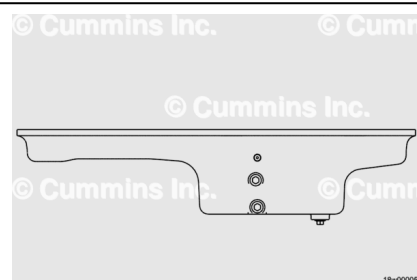

Aluminum Full Sump Style			
Lubricating Oil Pan Capacity		Lubricating Oil Filter Capacity	Total Lubricating Oil Capacity
Low	Maximum		
75.7 liters [20 U.S. gal]	83.3 liters [22 U.S. gal]	2.2 liters [0.6 U.S. gal]	88.6 liters [23.4 U.S. gal]

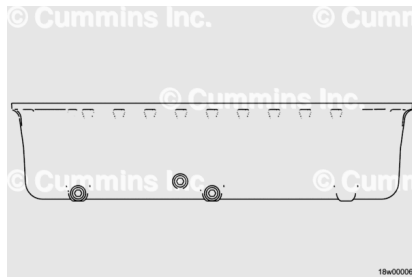


Diagram of the Aluminum Full Sump Style oil pan. It shows a rectangular pan with a flange on top and a drain plug on the bottom. The pan is labeled with '© Cummins Inc.' and '18w00006'.

Aluminum Shallow Full Sump Style			
Lubricating Oil Pan Capacity		Lubricating Oil Filter Capacity	Total Lubricating Oil Capacity
Low	Maximum		
45.2 liters [12 U.S. gal]	53 liters [14 U.S. gal]	2.2 liters [0.6 U.S. gal]	58.3 liters [15.4 U.S. gal]

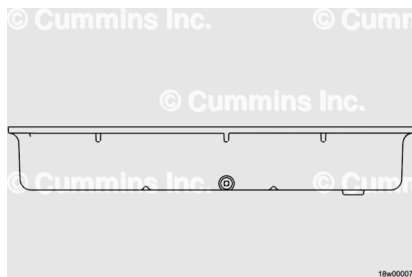


Diagram of the Aluminum Shallow Full Sump Style oil pan. It shows a rectangular pan with a flange on top and a drain plug on the bottom. The pan is labeled with '© Cummins Inc.' and '18w00007'.