



Technical Service Bulletin

Technical Service Bulletin: tsb100180

Released Date: 22-Oct-2002

Industrial C8.3 Series Update

Industrial C8.3 Series Update


Warranty Statement

The information in this document has no effect on present warranty coverage or repair practices, nor does it authorize TRP or Campaign actions.

Contents

This Technical Service Bulletin supports the latest version of the C8.3 industrial engine. The new C8.3 engines will meet the next level of both Environmental Protection Agency (EPA) and European emissions requirements while providing increased performance and reliability.

©Cummins Inc

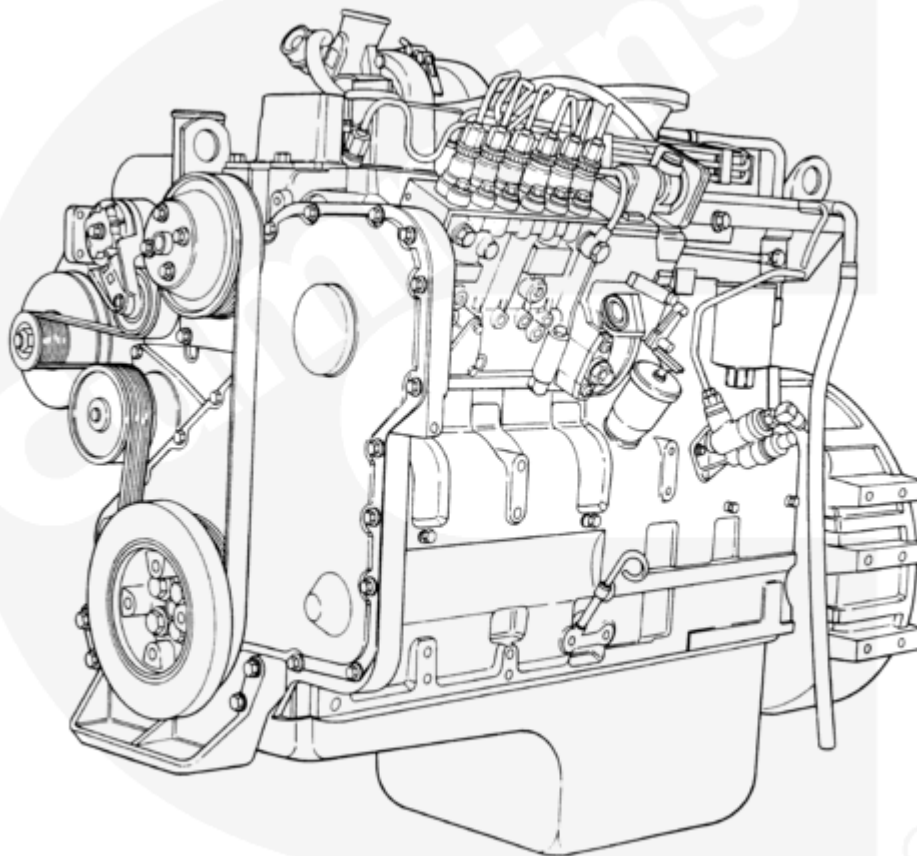

ew900gu

Engine Ratings 2

New Engine Information 3

Additional Service Literature 5

Engine Identification 5

Engine Diagrams 7

Maintenance Guidelines - Overview 11

Tool Requirements 11

Maintenance Schedule 12

Maintenance Record Form 13

Cummins/Fleetguard® Filter Specifications 14

All C8.3 engines use the Bosch® P3000 in-line fuel system. The available ratings are as follows:

Rated Power hp (kW)	Rated Speed (rpm)	Peak Torque ft-lb (N•m)	Peak Torque Speed (rpm)	Governor Break (rpm)	High Idle (rpm)	Low Idle (rpm)	CPL
260 (194)	2200	825 (1119)	1500	2275	2460	850	8185
250 (186)	2200	853 (1157)	1500	2275	2457	850	8185
240 (179)	2200	823 (1116)	1500	2275	2460	850	8185
230 (172)	2200	820 (1112)	1400	2275	2412	850	8211
215 (160)	2200	668 (906)	1500	2275	2460	850	2996
205 (153)	2200	715 (969)	1500	2275	2460	850	2997
190 (142)	2000	640 (868)	1500	2075	2240	800	8197
185 (138)	2200	575 (780)	1500	2275	2400	1000	8307

