



ECOGENICA

INNOVATION MEETS
TECHNOLOGY



Wi-Fi enabled

R290 Refrigerant

Solar ready

HOT WATER HEAT PUMP | SPLIT SYTEM

EG-290FR

290 Litre heat pump hot water system with R290 natural refrigerant, delivered as a tank and heat pump pair.

290 L

Tank volume

5.3 w/w

COP

90 l/h

Recovery rate

247.7 L

1st hour delivery

Technical Specifications

EG-290FR | Hot Water Heat Pump Split System



PERFORMANCE & CAPACITY	
1st Hour Delivery	247.7 Litres
Tank Volume	290 Litres
Recovery Rate	90 Litres/Hour
Set Hot Water Temperature	68 °C
COP *	5.3 W/W
Suitable for People	Up to 7
HEATING	
Compressor Input Power	1020 Watts
Heat Pump Heating Capacity	3975 W
DIMENSIONS & FITTINGS	
Height	1850 mm
Width	570 mm
Heat Pump (H × W × D)	545 x 780 x 276 mm
Fittings (Inlet & Outlet)	20 mm / G ¾
Return Inlet	N/A
ELECTRICAL & ENVIRONMENT	
Power Supply	220–240V / 50Hz
Circuit Breaker	25 Amps
Maximum current	28
Operating Temperature Range	–7 °C ~ +43 °C
Refrigerant Type	R290
Protection Ranking Class	IPX4
Wi-Fi	Yes

* Specifications measured at inlet water temperature +14 °C, dry bulb +19 °C, wet bulb 15 °C, hot water set point 55 °C. Recovery rates vary with environmental conditions. Hot water temperature is limited to 70 °C.

This water heater is with fully welded enamel tank meeting the design requirements: AS 2712 and AS 60335. This water heater complies with AS 3498 and AS/NZS 1677.2. Maximum allowable pressure: 4.4MPa.

Dimensional Drawings

EG-290FR | All dimensions in millimetres

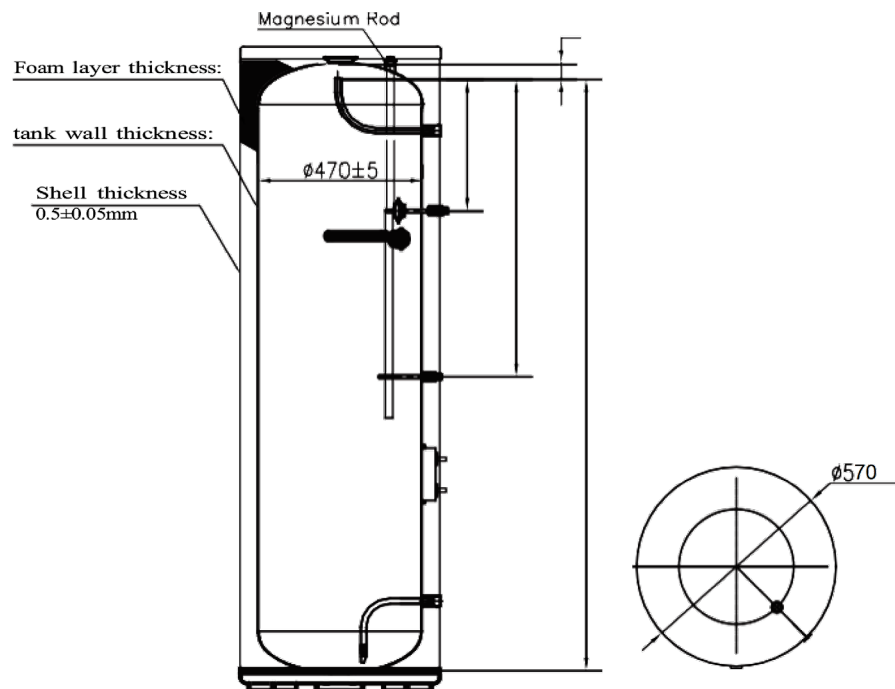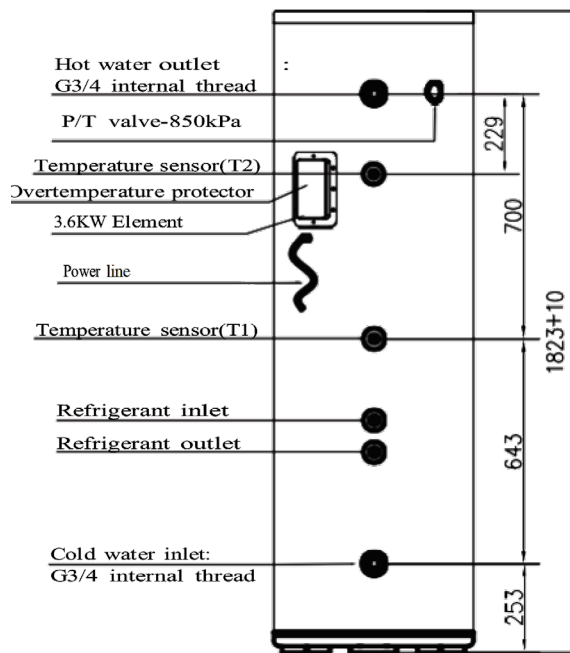

KEY DIMENSIONS

Heat Pump Size

545 x 780 x 276 mm

Tank Size


1850 x Ø570 mm

Fittings

20 mm / G ¾

Heat Pump Assembly - Exploded View

EG-290FR | Component breakdown

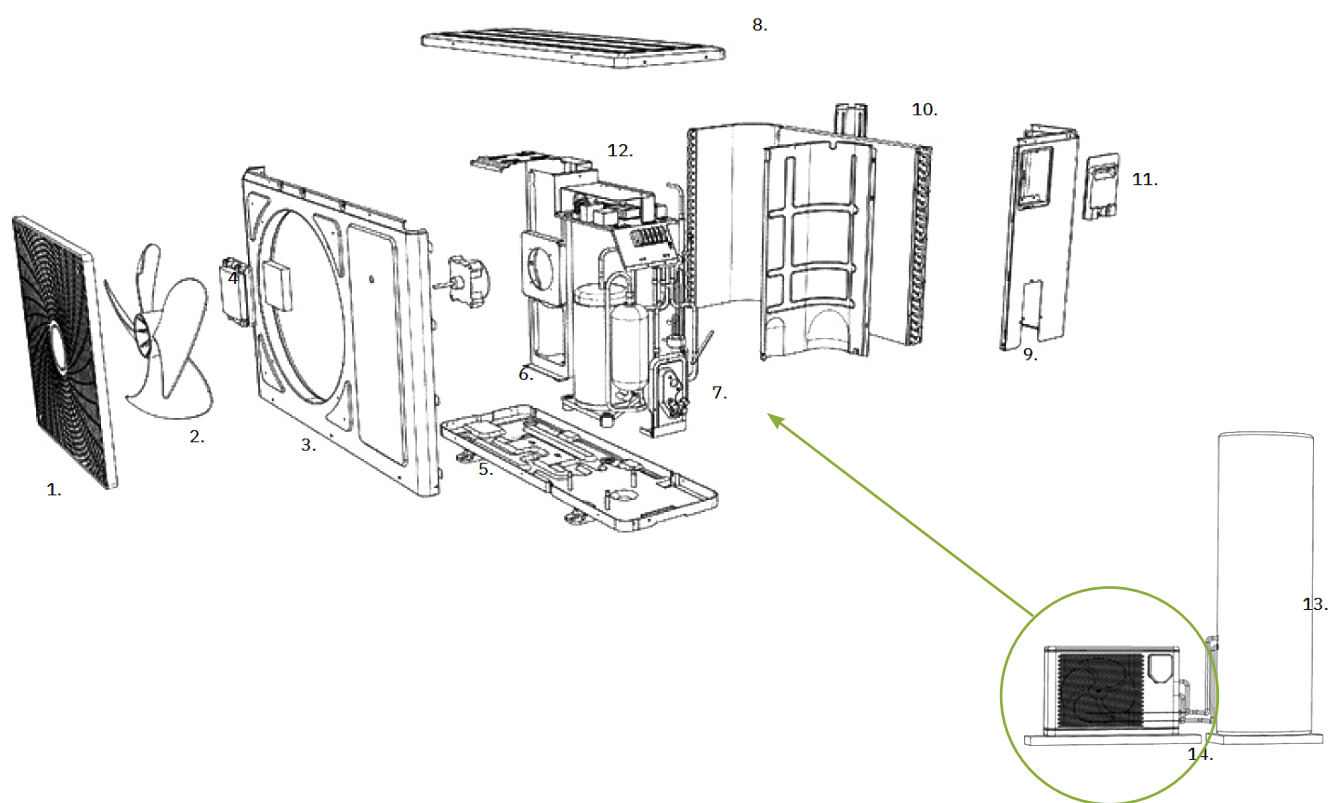

PARTS LIST

- | | | | |
|---|---|----|----------------------------|
| 1 | Fan protection grill | 8 | Top cover |
| 2 | Fan | 9 | Rear casing assembly |
| 3 | Front cover | 10 | Evaporator |
| 4 | Controller | 11 | Power cable cover |
| 5 | Condensation drain | 12 | Circuit board |
| 6 | Compressor assembly | 13 | Condenser tank |
| 7 | Schrader valve & quick condenser connection | 14 | Condenser pipe (pair coil) |



**Only ECONOVA® or a licensed tradesperson
may open this unit.**