

DIE ORDER JUSTIFICATION FORM

SHIPMENT VIA: LAND ☐
AIR ☐

Die Supplier: JIANGSU

Press code	Die No/str	Die Specifications	Wt/m.	Delivery Request Date	Org	New	Repeat.	Last Die Order Date	Die stock Level	Justification			Customer Ref.
										Reg. Order	Pre-mature failure	O/wt	
35	30552-3501	Dia 320x160; 1 CAV; PH			AUH	☒	☐						NEW (TOP URGENT)
F	30553-601	Dia 355x200; 1 CAV; PH			DXB	☒	☐						NEW (TOP URGENT)
F	30554-602	Dia 450X250; 1 CAV; PH			DXB	☒	☐						NEW (TOP URGENT)
F	30555-603	Dia 450x250; 1 CAV; PH			DXB	☒	☐						NEW (TOP URGENT)
F	30556-604	Dia 450x250; 1 CAV; PH			DXB	☒	☐						NEW (TOP URGENT)

Ordered By

(To be signed and faxed back to Gulf Extrusion's as order confirmation by the Die supplier)



Order received date :-

Signature :-




For jiggging and holding, a minimum clearance of 35–40 mm must be maintained at both ends of the profiles, resulting in a total required length of 80 mm

SUPPLIER	-	DATE	- 15/01/2026
EMAIL THE DESIGN BEFORE MANUFACTURING			
DIE SIZE	-	320x160	
No OF CAV	- 01	PRESS	- P35
SOLID	-	HOLLOW	- Yes
BOLSTER No.	-	INSERT No.	- 35C1C
SIZE	-	SIZE	- Old
REQUESTED DELIVERY DATE		- 30/01/2026	
3D MODULE FOR SIMULATION		- Yes	
MODE OF SHIPMENT		-	
NOTE: PROFILE WEIGHT SHOULD START FROM ...5...			
FINISH	Mtll	Anodizing	☒ Powder coating

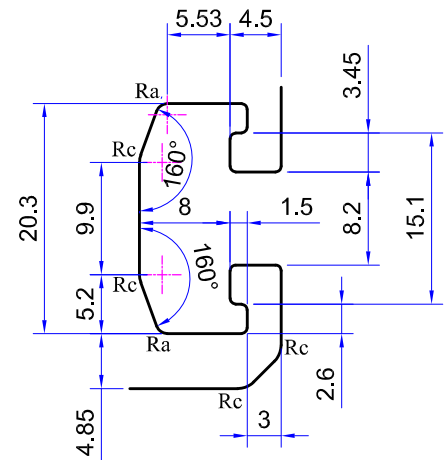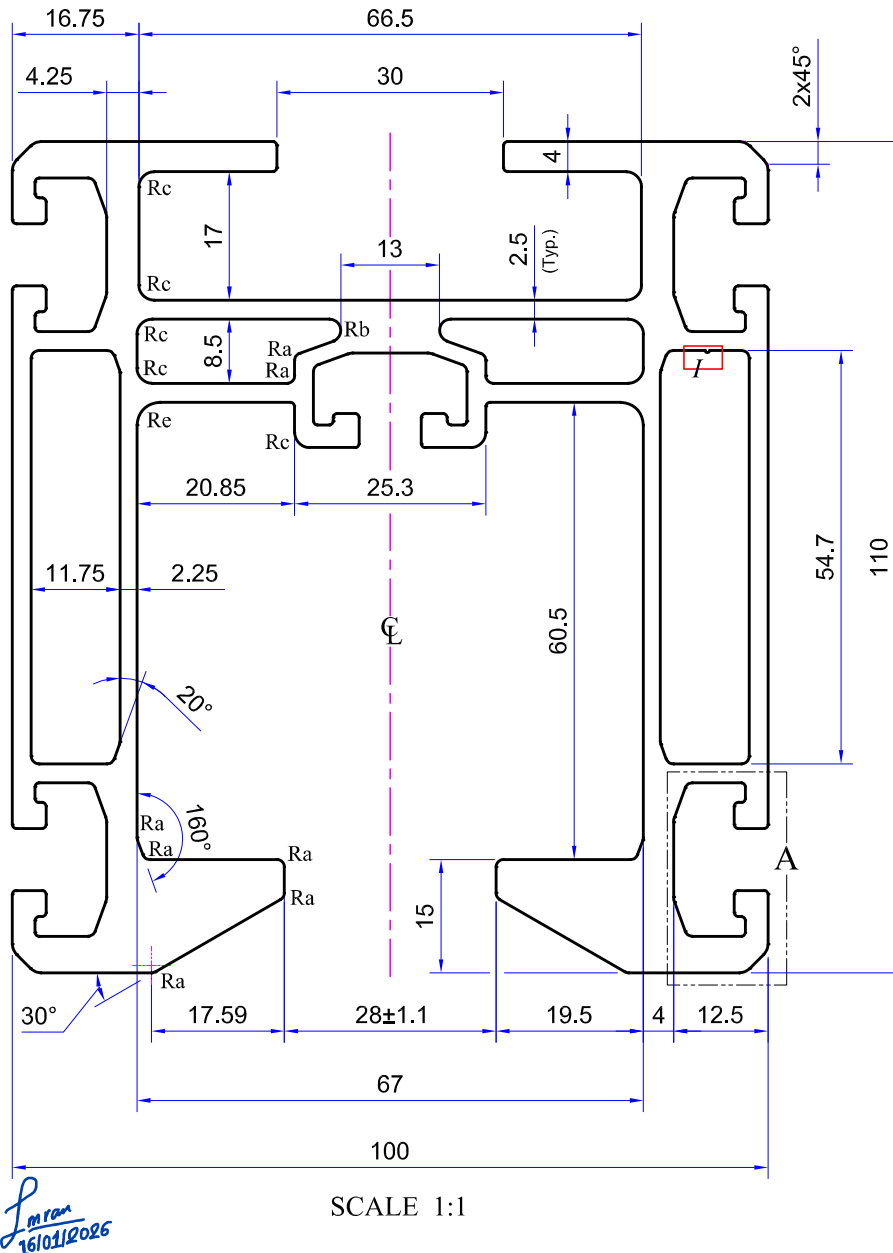

DETAIL - A
(Typ.-5 Places)

SCALE 3:2

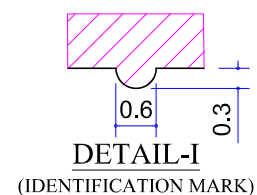

30552-3501

1. All dimensions are in millimeter
2. All unspecified radius = 0.5R
3. BS EN 755-9:2016 applicable for tolerances - unless mentioned otherwise
4. Ra=1.0rad, Rb=1.5rad, Rc=2.0rad, Re=3.0rad



P.O.Box-5598, DUBAI- United Arab Emirates
Tel +9714 8846146 Fax +9714 8846830
Email:mail@gulfex.com Web:www.gulfex.com

Customer :

Description :

Ref. No. : CAP1-110-100

NPE

N12570699-010

Mating :

Appd. by

Rev	00
-----	----

Scale : 1:4, 1:1, 3:2

Drawn	Ravinder
-------	----------

Section No.


Die Criticallity	4
------------------	---

Date	04/12/25
------	----------


30552

FINISH: NATURALANODIZED (10±3)microns


NOTE :- (xx) SLIGHT SHADES/BLENDS MIGHT APPEAR.
(**) SHUT OFF MARK MIGHT APPEAR.



SUPPLIER	-	DATE	- 15/01/2026
"EMAIL THE DESIGN BEFORE MANUFACTURING"			
DI SEIZE	-	355x200	
No OF CAV	-	1	PRESS - P6
SOLID	-	HOLLOW	- Yes
BOLSTER No.	-	INSERT No.	- 1-15840
SIZE	-	SIZE	- old
REQUESTED DELIVERY DATE			- 30/01/2026
3D MODULE FOR SIMULATION			
MODE OF SHIPMENT		-	
NOTE: PROFILE WEIGHT SHOULD START FROM <u>5.5</u>			
FINISH	Mill	Anodizing	☒ Powder coating

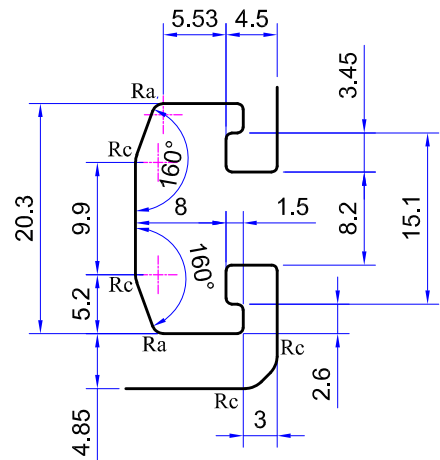


SCALE 3:2



DETAIL-I
(IDENTIFICATION MARK)

30553-601

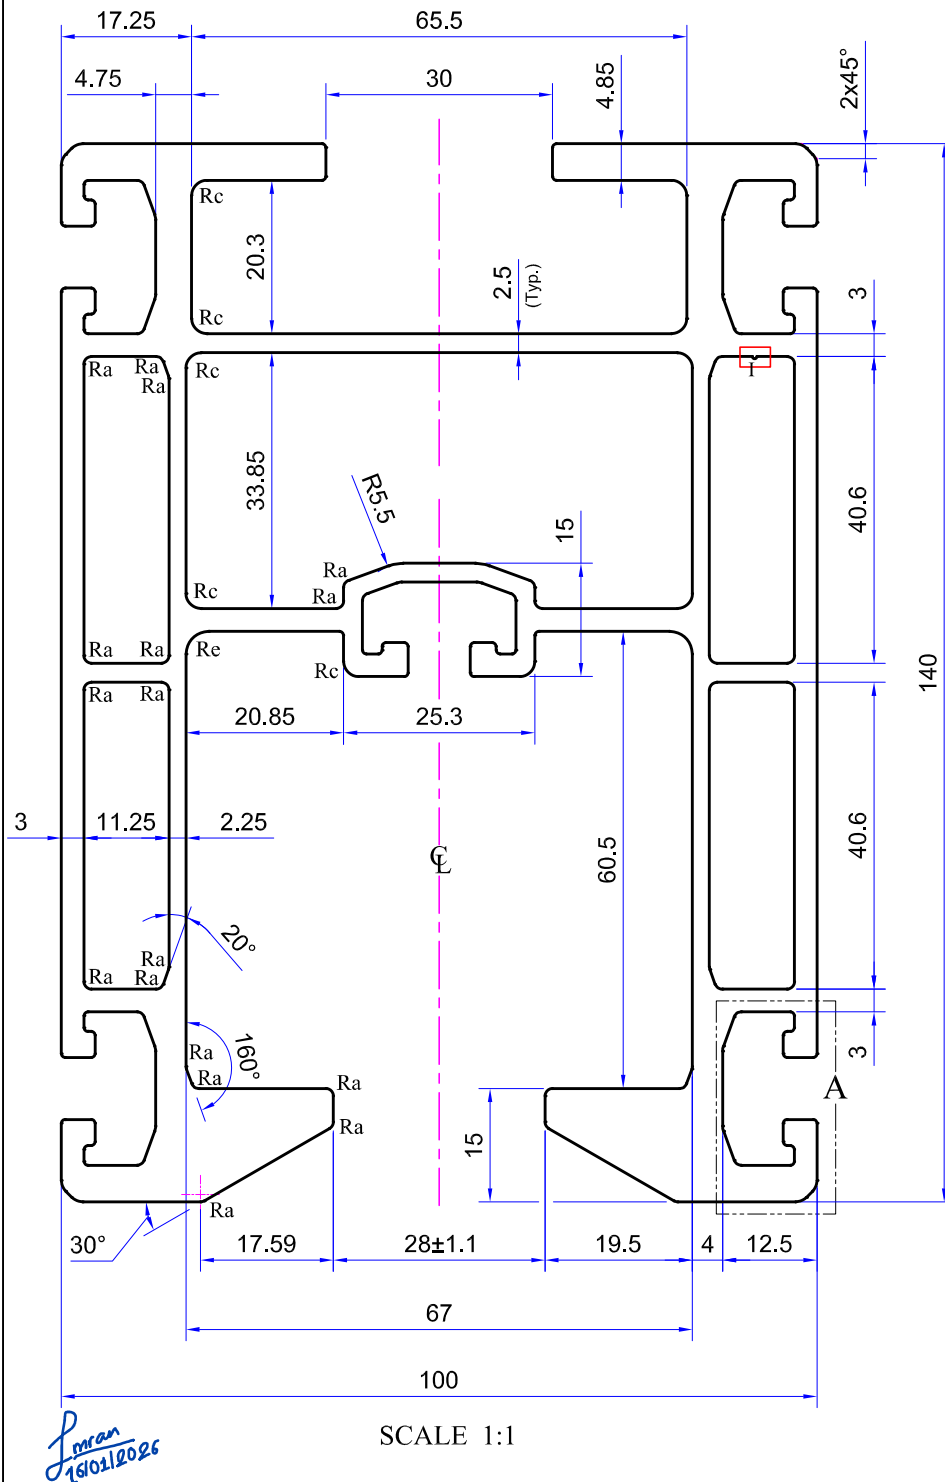

1. All dimensions are in millimeter
2. All unspecified radius = 0.5R
3. BS EN 755-9:2016 applicable for tolerances - unless mentioned otherwise
4. Ra=1.0rad, Rc=2.0rad, Re=3.0rad



P.O.Box-5598, DUBAI- United Arab Emirates
Tel +9714 8846146 Fax +9714 8846830
Email:mail@gulfex.com Web:www.gulfex.com

Customer :

Main visible surf.: _____		C/S Area	3088.3	CCD	170	Description :					
Sec. visible surf.: _____		Weight kg/m.	8.338	Alloy	6063	Ref. No. : CAP2-140-100				NPE	N12570699-020
Main visible surface		General wall thickness	2.25-4.75	Temper	T66	Mating :				Appd. by	Rev 00
C/S Length	Area/mtr.	External Perimeter	1059	Ext./R		Scale : 1:4, 1:1, 3:2		Drawn	Ravinder	Section No.	
848		Total Internal Perimeter	611	No. of cavites		Die Criticallity		4	Date	04/12/25	30553



SPECIAL NOTES:-

FINISH: NATURAL ANODIZED (10±3)microns


For jigg and holding, a minimum clearance of 35–40 mm must be maintained at both ends of the profiles, resulting in a total required length of 80 mm

NOTE :- (xx) SLIGHT SHADES/BLENDS MIGHT APPEAR.


(**) SHUT OFF MARK MIGHT APPEAR.

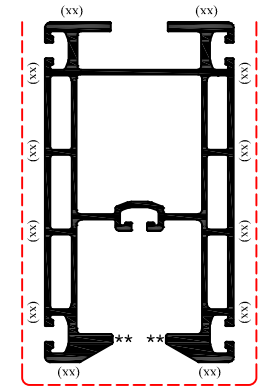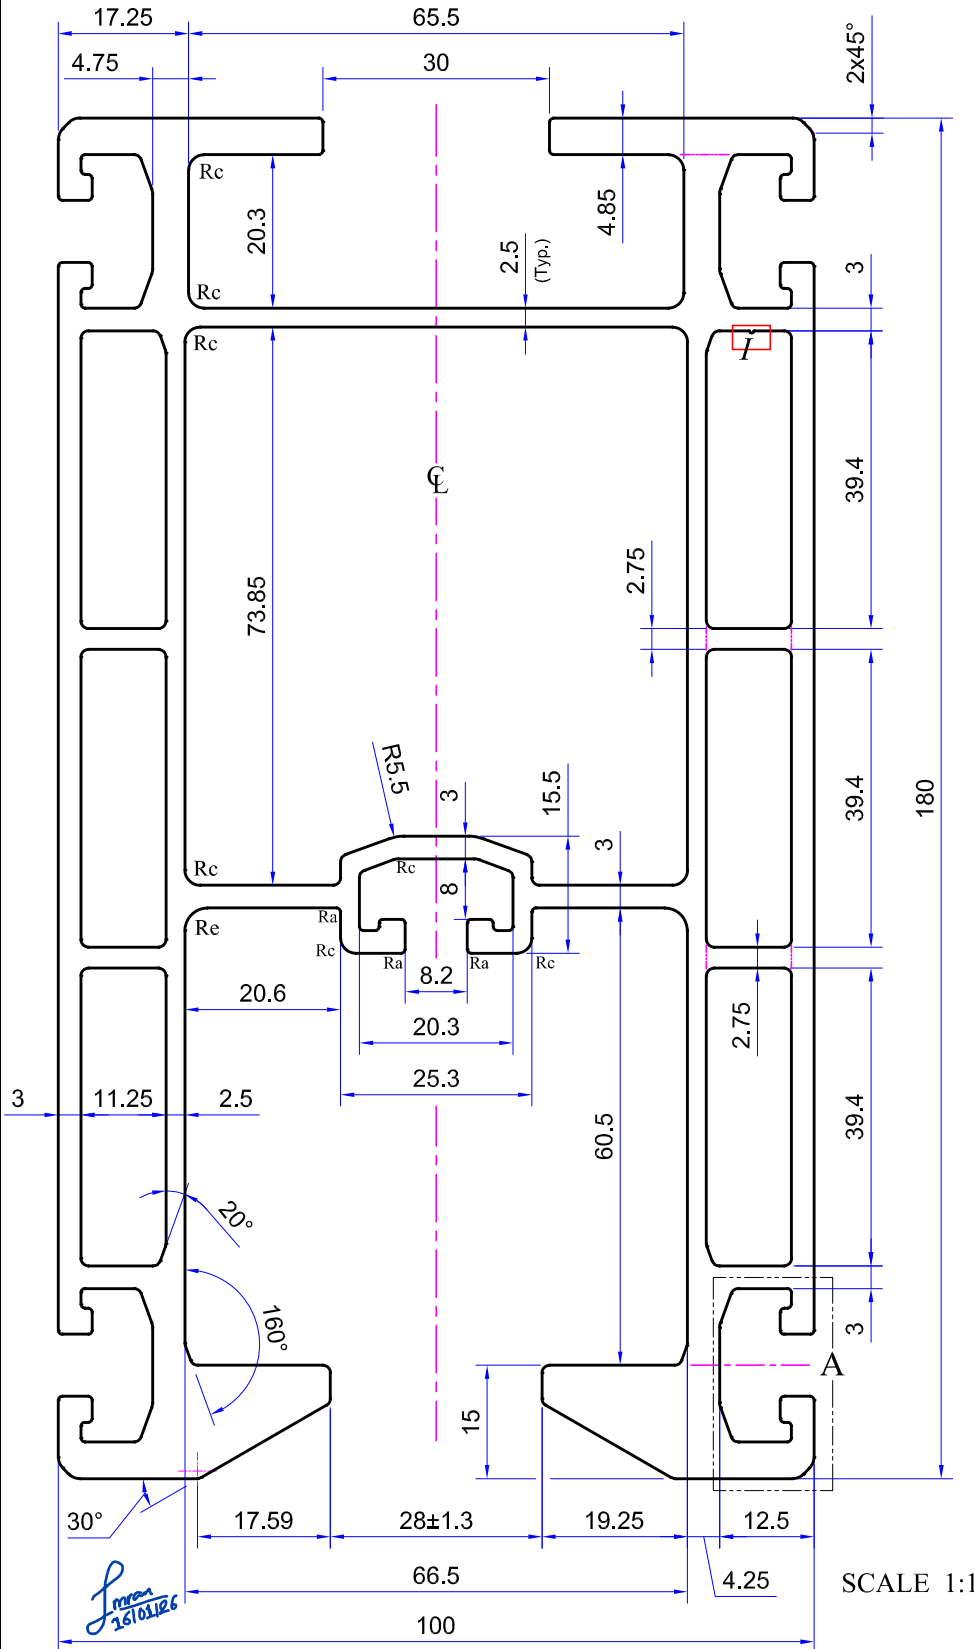

SCALE 1:4

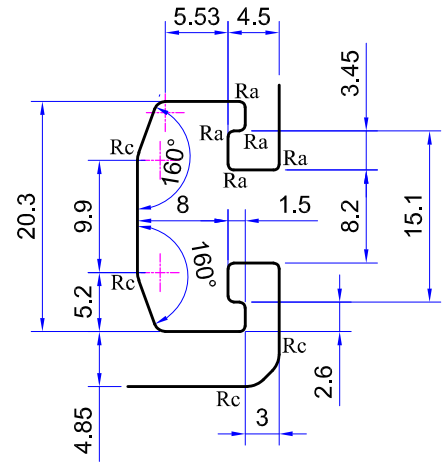DETAIL - A
(Typ.-4 Places)

SCALE 3:2

DETAIL-I
(IDENTIFICATION MARK)

SUPPLIER	-	DATE	- 15/01/2026
EMAIL THE DESIGN BEFORE MANUFACTURING			
DIE SIZE	-	450X250	
No OF CAV	- 01	PRESS	- P6
SOLID	-	HOLLOW	- Yes
BOLSTER No.	- 6-1-5-A	INSERT No.	
SIZE	- Old	SIZE	-
REQUESTED DELIVERY DATE			- 30/01/2026
3D MODULE FOR SIMULATION			- Yes
MODE OF SHIPMENT			-
NOTE: PROFILE WEIGHT SHOULD START FROM : .5. %			
FINISH	Mtl	Anodizing ☒	Powder coating ☐

SCALE 1:1

30554-601

1. All dimensions are in millimeter
2. All unspecified radius = 1.0R
3. BS EN 755-9:2016 applicable for tolerances - unless mentioned otherwise
4. Ra=0.5rad, Rc=2.0rad, Re=3.0rad



P.O.Box-5598, DUBAI- United Arab Emirates
Tel +9714 8846146 Fax +9714 8846830
Email:mail@gulfex.com Web:www.gulfex.com


Customer :

Description :


Main visible surf.: - - - - -	C/S Area	3655.0	CCD	204	Ref. No. : CAP3-180-100		NPE	N12570699-030	
Sec. visible surf.: - . - . - .	Weight kg/m.	9.869	Alloy	6063	Mating :		Appd. by	Rev	01
Main visible surface		General wall thickness	2.5-4.85	Temper	T66	Scale : 1:4, 1:1, 3:2		Section No.	
C/S Length	Area/mtr.	External Perimeter	1138	Ext./R		Drawn	Ravinder	30554	
926		Total Internal Perimeter	880	No. of cavities		Date	08/12/25		

FINISH: NATURALANODIZED (10±3)microns

NOTE :- (xx) SLIGHT SHADES/BLENDS MIGHT APPEAR.
(**) SHUT OFF MARK MIGHT APPEAR.

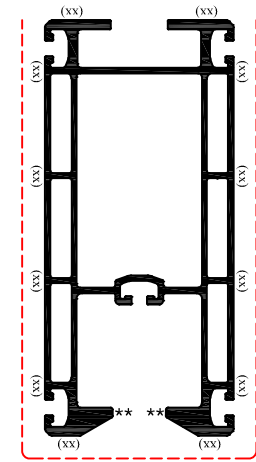

SUPPLIER	-	DATE	-15/01/2026
EMAIL THE DESIGN BEFORE MANUFACTURING			
DIE SIZE	-	450x250	
NO OF CAV	-	01	PRESS - P6
SOLID	-	HOLLOW	- Yes
BOLSTER No.	-	B-05161	INSERT No.
SIZE	-	Old	SIZE -
REQUESTED DELIVERY DATE	-	30/01/2026	
3D MODULE FOR SIMULATION	-	Yes	
MODE OF SHIPMENT	-		
NOTE: PROFILE WEIGHT SHOULD START FROM ...5			
FINISH	Mill	Anodizing	☒ Powder coating

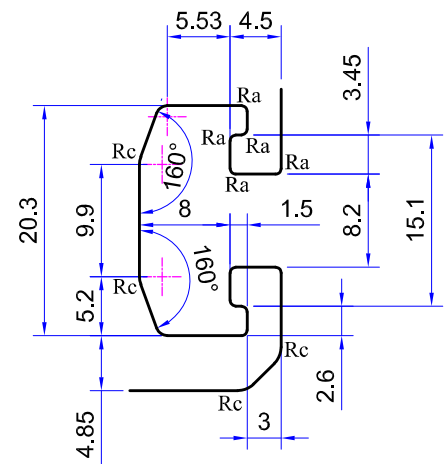

A cross-sectional diagram of a T-joint. The vertical plate has a width of 0.6 and a thickness of 0.3. The horizontal plate is attached to the top of the vertical plate.

30555-601

الخليج للسحب
Gulf Extrusions

P.O.Box-5598, DUBAI- United Arab Emirates
Tel +9714 8846146 Fax +9714 8846830
Email:mail@gulfex.com Web:www.gulfex.com

Description :

Ref. No. : CAP4-220-100

NPE

N12570699-040

Mating :

Appd. by

Rev	01
-----	----

Scale : 1:4, 3:4, 3:2

Drawn	Ravinder
-------	----------


Die Criticallity	4
------------------	---

Date	08/12/25
------	----------

Section No.


30555

NOTE :- (xx) SLIGHT SHADES/BLENDS MIGHT APPEAR.

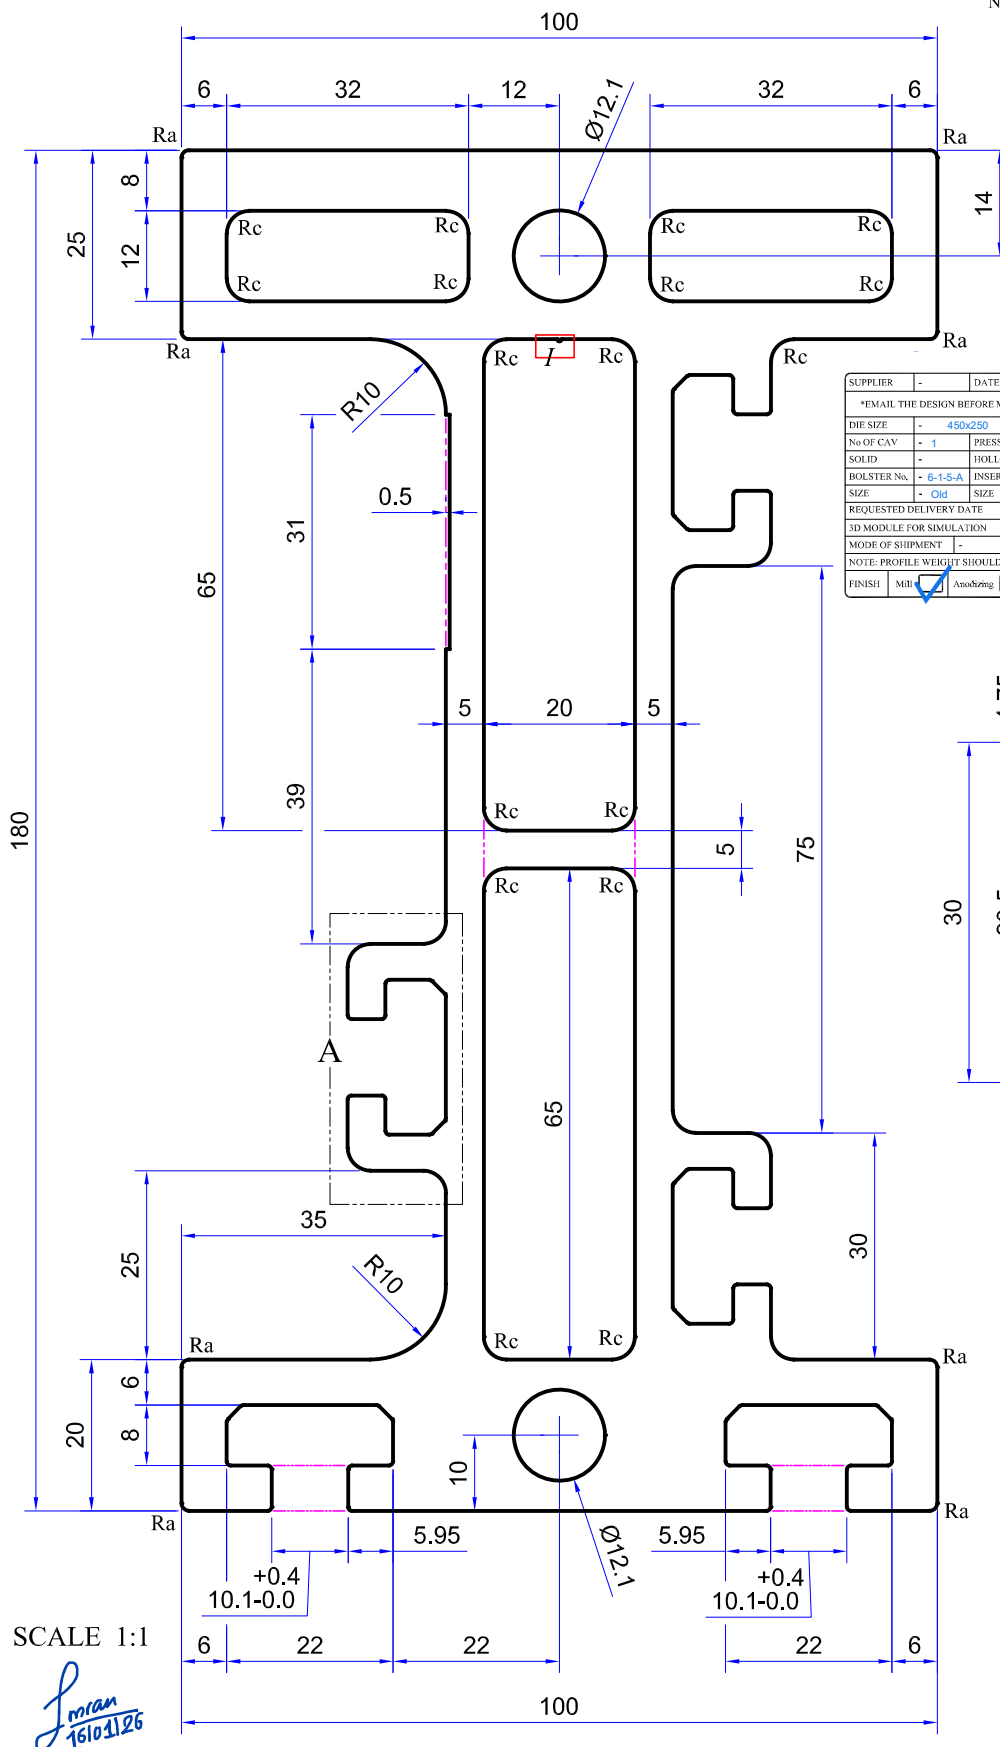

SCALE 1:1


Imran
16/01/2026

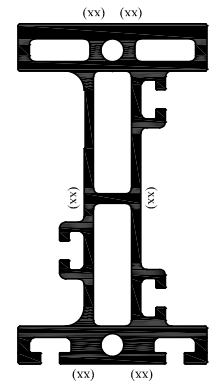

SCALE 1:4


NO EXPOSED SURFACE

SUPPLIER	-	DATE	-15/01/2026
EMAIL THE DESIGN BEFORE MANUFACTURING			
DIE SIZE	-	450x250	
No OF CAV	-	1	PRESS
SOLID	-	HOLLOW	-
BOLSTER No.	-	6-1.5-A	INSERT No.
SIZE	-	Old	SIZE
REQUESTED DELIVERY DATE	-	30/01/2026	
3D MODULE FOR SIMULATION	-	Yes	
MODE OF SHIPMENT	-		
NOTE: PROFILE WEIGHT SHOULD START FROM -5.5%			
FINISH	MILL	Anodizing	Powder coating

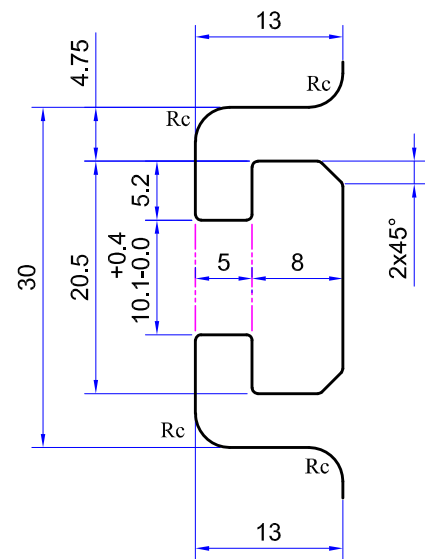

DETAIL - A
(Typ.-3 Places)

SCALE 3:2



DETAIL-I
(IDENTIFICATION MARK)

1. All dimensions are in millimeter
2. All unspecified radius = 0.5R
3. BS EN 755-9:2016 applicable for tolerances - unless mentioned otherwise
4. Ra=1.0rad, Rc=3.0rad



P.O.Box-5598, DUBAI- United Arab Emirates
Tel +9714 8846146 Fax +9714 8846830
Email:mail@gulfex.com Web:www.gulfex.com

Customer :

Description :

Ref. No. : RGV Rail Profile

Mating :

Scale : 1:4, 1:1, 3:2

Die Criticality

Drawn Ravinder

Date 08/12/25

NPE

Appd. by

Rev

01

N12570699-050

Section No.

30556

Main visible surf.: - - - - -	C/S Area	5085.3	CCD	206
Sec. visible surf.: - - - - -	Weight kg/m.	13.730	Alloy	6061
Main visible surface	General wall thickness	4.5-8.0	Temper	T6
C/S Length	Area/mtr.	External Perimeter	928	Ext./R
-		Total Internal Perimeter	571	No. of cavities