Datasheet

Article Ident: 1122003

Drawing Number: 11222-0002

Boehme + Ewert
EXPERT TEMPERATURE SOLUTIONS


Ambient Thermometer Assembly with Perforated Protection Tube
Typ TRF22-nA; Configuration:
Sensor construction:
BMW RTD-Inset
BDS Diameter 4,5 mm
B04 Material 1.4571
Sensorelement:
SDK RTD-element wire-ceramic
S12 Resistance value 2 x PT100; DIN (EN 60751
S26 Temperature range -200 - 600 °C
SW3 Tolerance Class B
SV3 3-wire-connection
Explosion-proof:
EAN II 3G Ex nA IIC T4 (ATEX) Gc
Connection head:
AB4 form BUZH (Aluminium; IP65)
AO1 surface plastic coated grey
AC2 Cable entry M20 x 1,5
AVS Cable gland plastic black
Transmitter:
TEA Typ TMT82, HART (Endress+Hauser)
T01 1 piece
T1N adjusted Temp. Range -20 - 500 °C
TF2 Error signal upscale
Thermowell:
SCG Diameter 12 x 1,5 mm
SB4 Thermowell with open bottom and perforation
S04 Material 1.4571
Process connection:
PG6 Thermocouple fitting G 1/2
PEE Material 1.4571 / ferrule 1.4571
auxiliary:
ZDC Gasket DIN 7603 Form C; Cu/Fibre
Further requirements:
W0S free of Silicone
Nominal length 1000 mm
Marking:
KKT TAG by adhesive lable
KKM DUERR-Material number (neutral)

Datasheet

Article Ident: 1122003

Drawing Number: 11222-0002

Boehme + Ewert
EXPERT TEMPERATURE SOLUTIONS

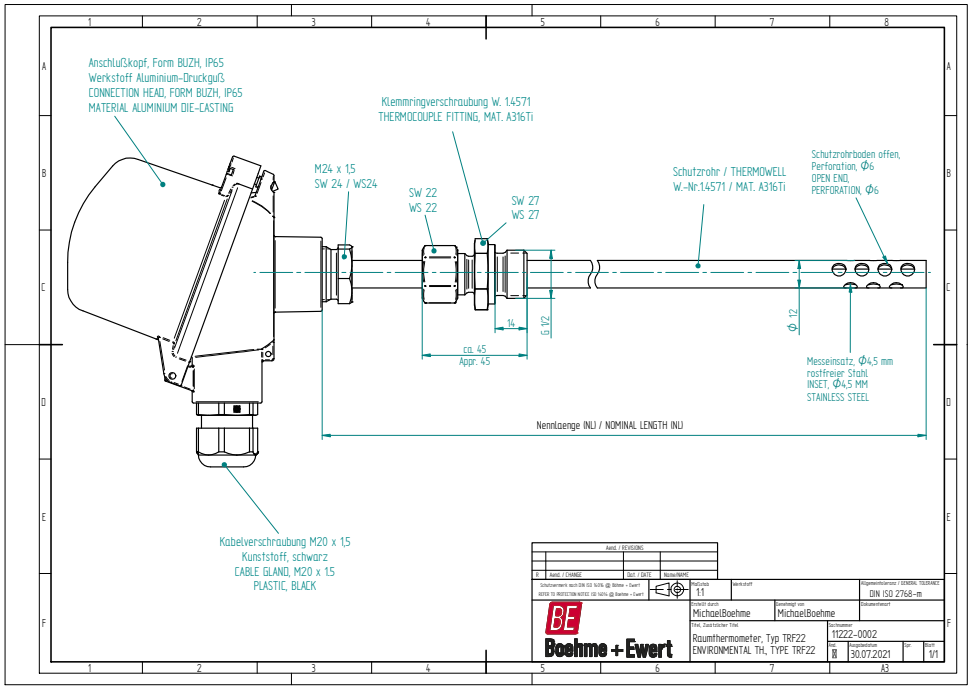

Böhme + Ewert GmbH Am Spielacker 4 D 63571 Gelnhausen Tel.: +49 (0)6051 916656 0 Email: sales@be-temp.de