

COMMENTS :

09

AS BUILT

N.					
Date					
N.					
Date					
N.					
Date					
N.	MGA	BBA	JRA	AS BUILT	ASB
Date	95/08/29	95/08/29	95/08/29		
N.	MGA	BBA	JRA	UP DATED ACCORDING TO CEGELEC LETTER TAJ/HAR 517 AND COREDEL STUDIES	INF
Date	93/03/08	93/03/08	93/03/08		
N.	MGA	BBA	JRA	UP DATED ACCORDING TO CEGELEC LETTER TAJ/HAR 470 AND COREDEL STUDIES	INF
Date	93/02/17	93/02/17	93/02/18		
N.	JPR	BBA	JRA	ORIGINAL ISSUE	INF
Date	93/01/19	93/01/19	93/01/20		
REV.	ETABLI ESTABLISHED	VERIFIE CHECKED	APPROUVE APPROVED	MODIFICATIONS	STAT.

VINH-SON HYDRO-POWER STATION

2 x 40 MVA

CONTRACT N° 12-05/CEG-PC3-PET/01-91

SOCIALIST REPUBLIC OF VIET-NAM MINISTRY OF ENERGY PETECHIM-POWER COMPANY Nr 3 ENGINEER EDF	LEADER CEGELEC FRANCE ALSTHOM - JEUMONT CEGELEC	NEYPIC SDEM
---	--	----------------

ECHELLE SCALE	COMMONS POWER HOUSE 48 V DC BATTERY CHARGERS 20LCA001RD : 20LCA002RD EQUIPMENT DRAWING - ELECTRICAL DIAGRAM MATERIAL LIST AND CONNECTION DRAWING
------------------	--

	DATE	NOM NAME	VISA
ETABLI ESTABLISHED	93/01/19	JPR	le
VERIFIE CHECKED	93/01/19	BBA	le
APPROUVE APPROVED	93/01/20	JRA	R

CEGELEC

Division ERE P : 35, rue d'Alsace F - 92531 Levallois Perret Cedex

CGE VIN20 SLCA-PF001 P2135A30166- D

FOLIO
SHEET
1
FIN
SH. END
13**COREDEL**
CHLORIDE FRANCE**CHLORIDE**
POWER ELECTRONICS


Dessin n.

page


[illegible]

Technical drawing of a vertical container. A dimension line on the left indicates a height of 1660. The container has a curved top and bottom. On the front panel, there are two square labels: the left one contains a downward-pointing triangle and is labeled 'P1'; the right one contains an upward-pointing triangle and is labeled 'P1'. To the right of these labels are three circular features labeled 'H1', 'H2', and 'H3' from top to bottom. Further to the right is a circular feature labeled 'S1'. A small circle is located on the lower left side of the front panel.

HEIGHT: 1660mm
WIDTH: 600mm
DEPTH: 400mm
PAINT: RAL 7032
PROTECTION DEGREE: IP41
KEYS: 3131E
S1: ON/OFF CHARGER
P1: CHARGER VOLTAGE
P4: CHARGER CURRENT
H1: CHARGER FAULT
H2: LEDS HIGH VOLTAGE
H3: LOW VOLTAGE

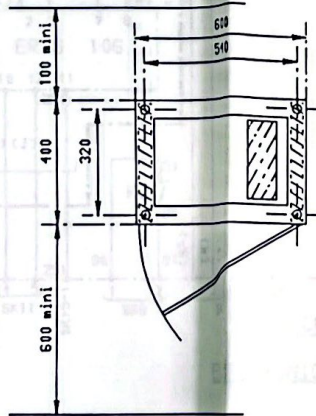

17/02/93	MGA			559		01
19/01/93	JPR			1 ^{re} Edition		00
Date	Dessine	Verifie	Approuve	DESCRIPTION / O.M.		Indice
CHARGER 48V / 100A FRONT VIEW						RB : 7492
COREDEL CHLORIDE FRANCE		CHLORIDE POWER ELECTRONICS		Dessin n. P4624		page 1/1

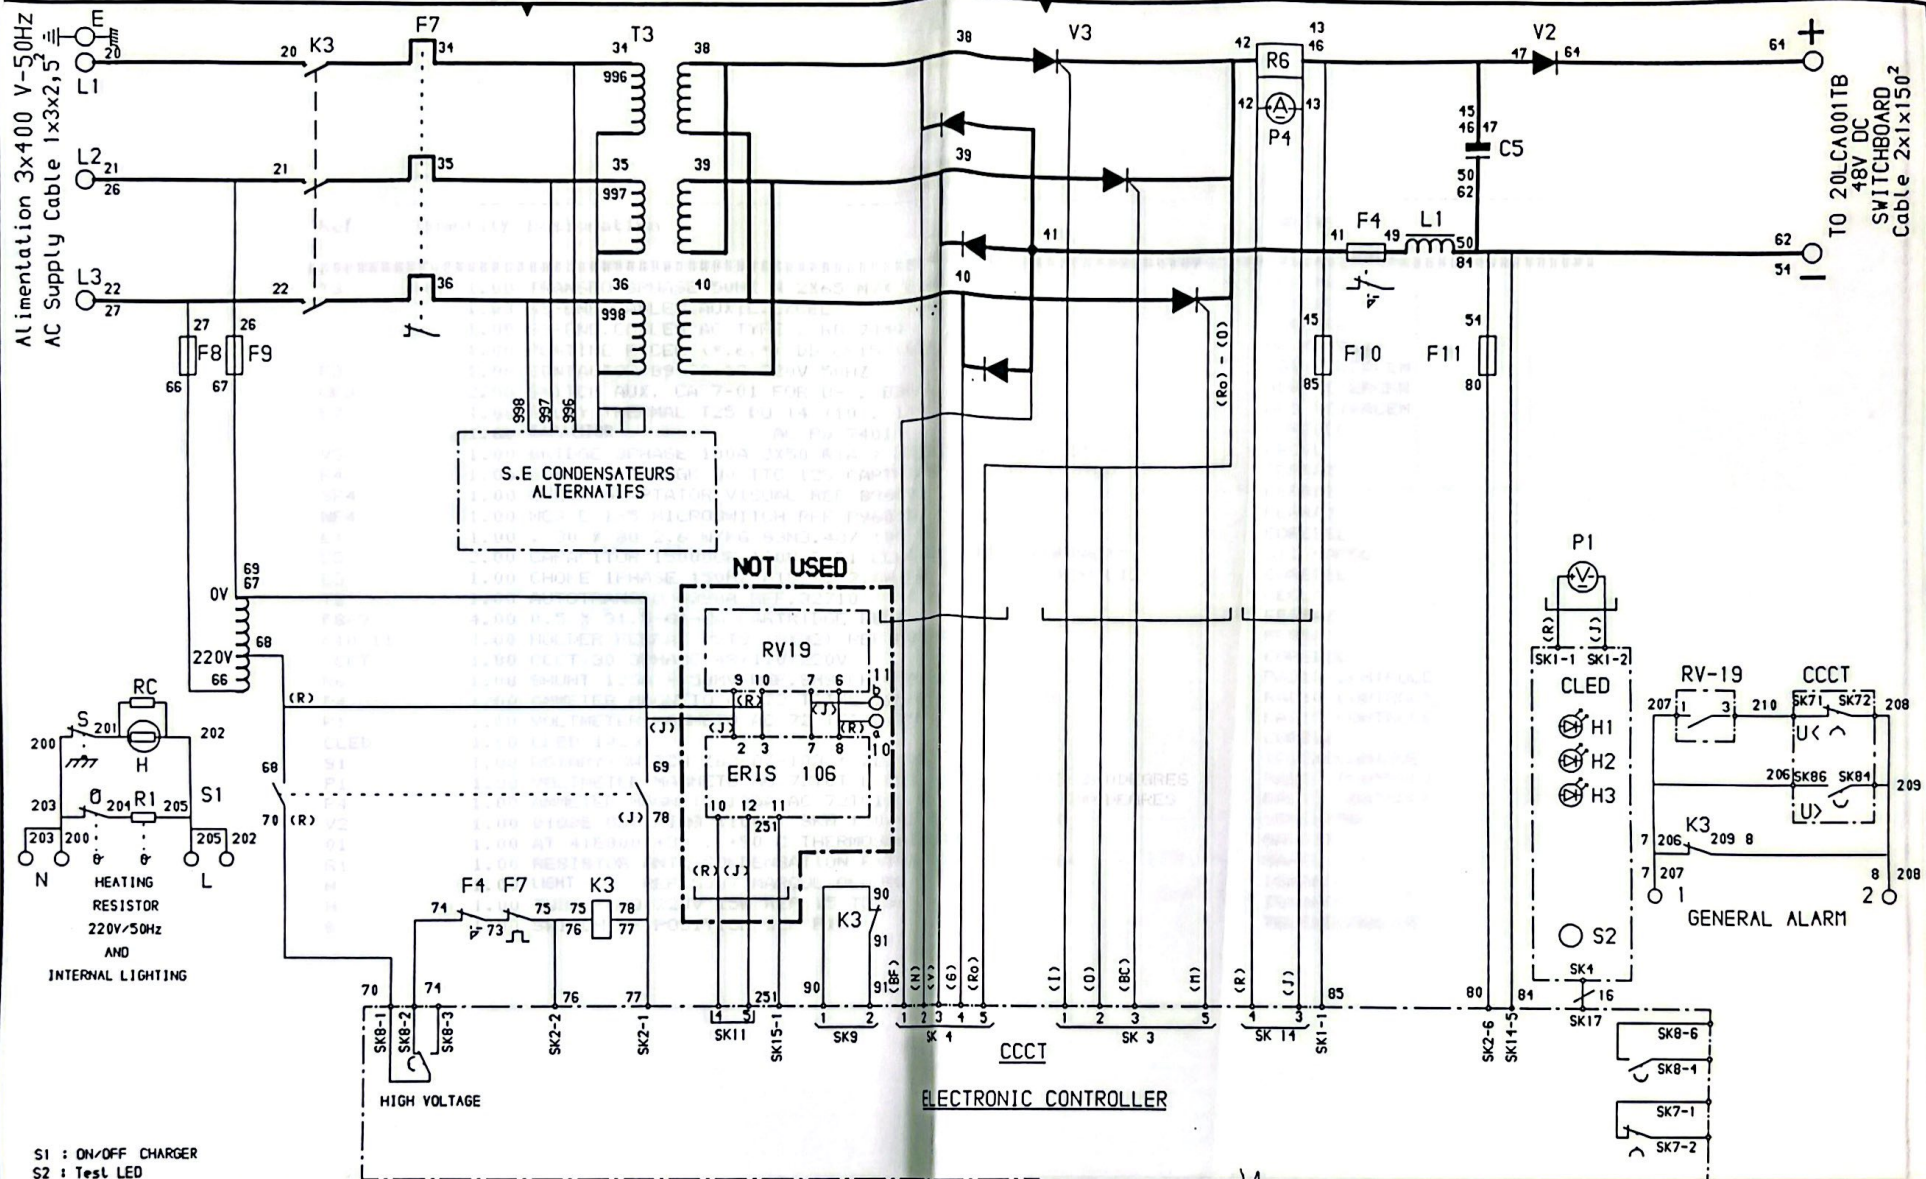

S1 : ON/OFF CHARGER
S2 : Test LED
P1 : Battery voltage (BF) : Dark blue
P4 : Charger current (N) : Black
(V) : Purple
(G) : Grey
(Ro) : Red
(R) : Pink
(J) : Yellow


H1 : Charger Fault
H2 : High voltage
H3 : Low voltage
H : Internal lighting

01/03/93	LNA			1174	02
Date	Dessine	Verifie	Approuve	DESCRIPTION / O.M.	Indice
20 LCA 002 RD	CHARGER B	CHARGER 48V/100A	ELECTRICAL DIAGRAM	RB : 7492	
Dessin n. SE11926					page 2
COREDEL CHLORIDE POWER ELECTRONICS					

Ref.	Quantity	Designation	Supplier
T3	1.00	TRANSFO 3PHASE 50HZ N 2X65 M7X 8.19 KVA	COREDEL
	1.00	SS-ENS.CABLES AUXIL.EXCEL	COREDEL
	1.00	SS-ENS.CABLES AC TYPE 2 RB 7444	COREDEL
	1.00	PLATINE EXCEL (+.6.+) DD 6815 (03)	DE MATTEIS
K3	1.00	CONTACTOR B9-30-10 220V 50HZ	ABB PETERCEN
CK3	2.00	SWITCH AUX. CA 7-01 FOR B9 . B30	ABB PETERCEN
F7	1.00	RELAY THERMAL T25 DU 14 (10 . 14A)	ABB PETERCEN
	1.00	CAPACITOR . AC RD 7401	COREDEL
V3	1.00	BRIDGE 3PHASE 100A 3X50 RIA + 3X70 HF/03 60 TS53	ARCEL
F4	1.00	6 BODK C3 UR6K 30 TTC 125 CARTRIDGE UR REF Y78980	FERRAZ
SF4	1.00	3 EDV ADAPTATOR VISUAL REF B96003	FERRAZ
NF4	1.00	MCS E 1-5 MICROSWITCH REF P96015	FERRAZ
L1	1.00	. 30 X 30 2.6 W/KG S3N3.48/ 100 CERT	COREDEL
C5	2.00	CAPACITOR 15000UF 100V D:51 ELECTROLYTIC "COMPACT"	SIC SAFCO
L3	1.00	CHOKE 1PHASE 150HZ A18X42 2.6W/KG 0.17X10-3 AZH L12	COREDEL
T2	1.00	AUTOTRANSFO 6290A REF.32710	CECLA
F8-9	4.00	0.5 X 31.5-61-2A CARTRIDGE FUSE	FERRAZ
F10-11	4.00	HOLDER FERRAZ PST8 (8X32) REF F081218	FERRAZ
CCCT	1.00	CCCT 30 3PHASE 48/110/220V	COREDEL
R6	1.00	SHUNT 125A - 50MV REF.SHS-CHLO 0.5%	RADIO CONTROLE
P4	1.00	AMMETER MAGNETO AC 72 TC1/L 125A-50MV CL 1.5	RADIO CONTROLE
P1	1.00	VOLTMETER MAGNETO AC 72 TC1/L 75V CL 1.5	RADIO CONTROLE
CLED	1.00	CLED 1023	COREDEL
S1	1.00	ROTARY-SWITCH ZB2-BZ-103 + ZB2-BD2	TELEMECANIQUE
P1	1.00	VOLTMETER MAGNETO AC 72TC1/L CL1.5 75V DEVIAT 240DEGRES	RADIO CONTROLE
P4	1.00	AMMETER MAGNETO 125A AC 72TC1/L CL1.5 DEVIAT 240DEGRES	RADIO CONTROLE
V2	1.00	DIODE BLOCKING (100A) SKN 130/02 ON P 0.8/120	SEMIKRON
O1	1.00	AT 41E000/+30 . +90 C THERMOSTAT DANFOSS	GARBIT
R1	1.00	RESISTOR ANTI-CONDENSATION EXTRA SSW REF 17506	SAREL
H	1.00	LIGHT REF 5337 MARQUE CLAUDE	ISNARD
H	1.00	TUBE FLUD 220V 15W REF 15 T8CW	ISNARD
S	1.00	SWITCH OF POSITION XCK P121	TELEMECANIQUE

CUBICLE CHARGER TERMINAL BLOCK
20 LCA 001 RD


09/03/93	LNA	☒	1 ^{re} Edition	00
Date	Dessine	Verifie	Approuve	Indice
MATERIAL LIST - CHARGER EXCEL 18V/100A/3				RB : 7192
COREDEL CHLORIDE FRANCE		CHLORIDE POWER ELECTRONICS		Dessin n. NE12394
				page 1/1



AC SUPPLY
3x400V/50Hz

HEATING
RESISTOR 220V/50Hz
AND
INTERNAL
LIGHTING 220V/50Hz

7 TERMINALS P8
6mm² Max

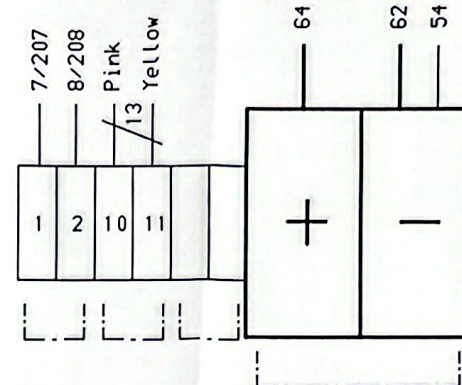

GENERAL ALARM

NOT USED

SPARE

TO 20LCA001TB
48V DC
SWITCHBOARD


6 TERMINALS P8
6mm² Max

2 TERMINALS P42
150mm² Max

T PE

CUBICLE CHARGER TERMINAL BLOCK
20 LCA 001 RD


03/03/93	LNA			1 ^{re} Edition	00
Date	Dessine	Verifie	Approuve	DESCRIPTION / O.M.	Indice
CUBICLE CHARGER TERMINAL BLOCK					RB : 7492
COREDEL CHLORIDE FRANCE		CHLORIDE POWER ELECTRONICS		Dessin n. DD 6954	page 1



AC SUPPLY
3x400V/50Hz

HEATING
RESISTOR 220V/50Hz
AND
INTERNAL
LIGHTING 220V/50Hz

7 TERMINALS P8
6mm² Max

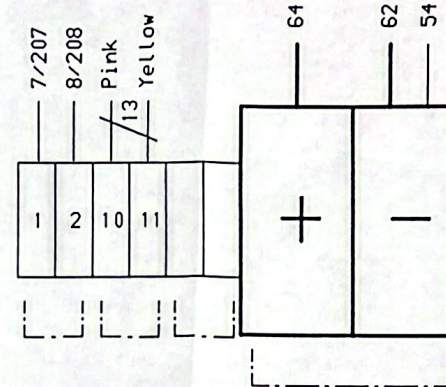

GENERAL ALARM

NOT USED

SPARE

TO 20LCA001TB
48V DC
SWITCHBOARD

6 TERMINALS P8
6mm² Max

2 TERMINALS P42
150mm² Max

T PE

CUBICLE CHARGER TERMINAL BLOCK
20 LCA 002 RD

03/03/93	LNA			1 ^{re} Edition	00
Date	Dessine	Verifie	Approuve	DESCRIPTION / O.M.	Indice
CUBICLE CHARGER TERMINAL BLOCK					RB : 7492
COREDEL CHLORIDE FRANCE		CHLORIDE POWER ELECTRONICS		Dessin n. DD 6954	page 2