




PHYAD2	Ipd/O	The PHY Address is latched at power-up or reset and is configurable to any value from 1 to 7.
PHYAD1	Ipd/O	The default PHY Address is 00001.
PHYAD0	Ipu/O	PHY Address bits [4:3] are always set to '00'.


CONFIG[2:0]	Mode
000	MII (default)
001	RMII
010	Reserved - not used
011	Reserved - not used
100	MII 100 Mbps Preamble Restore
101	Reserved - not used
110	Reserved - not used
111	Reserved - not used




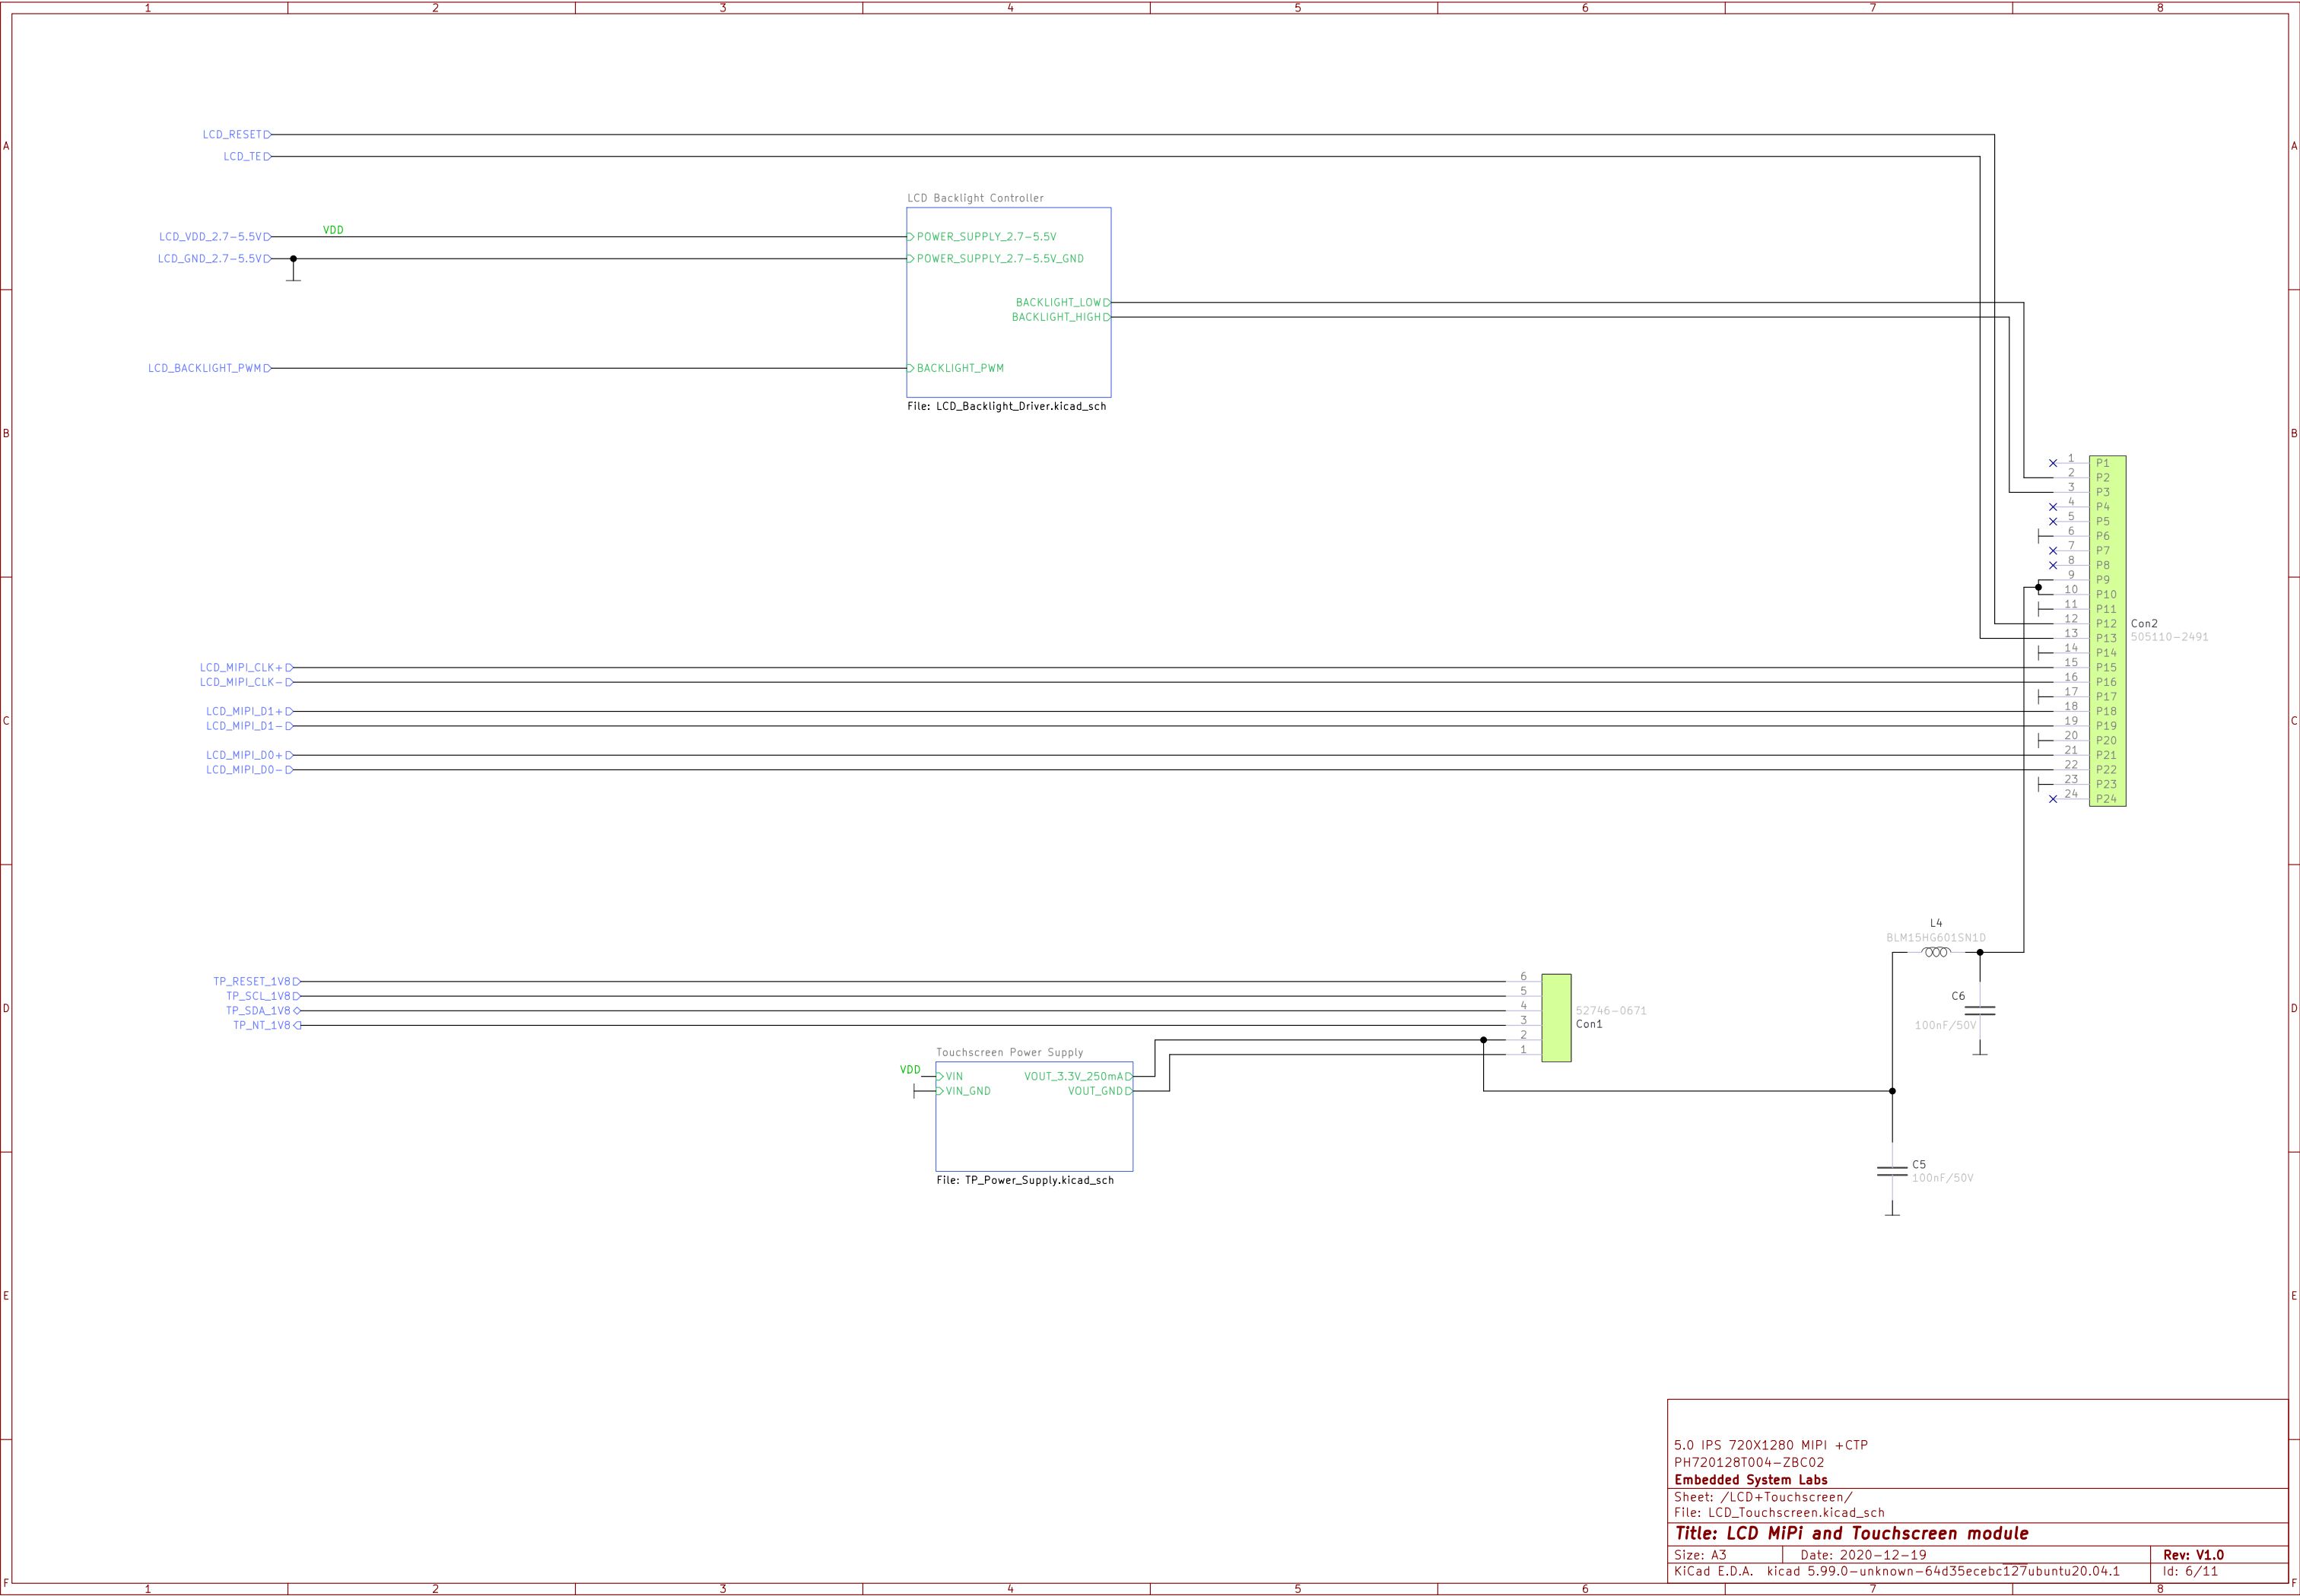

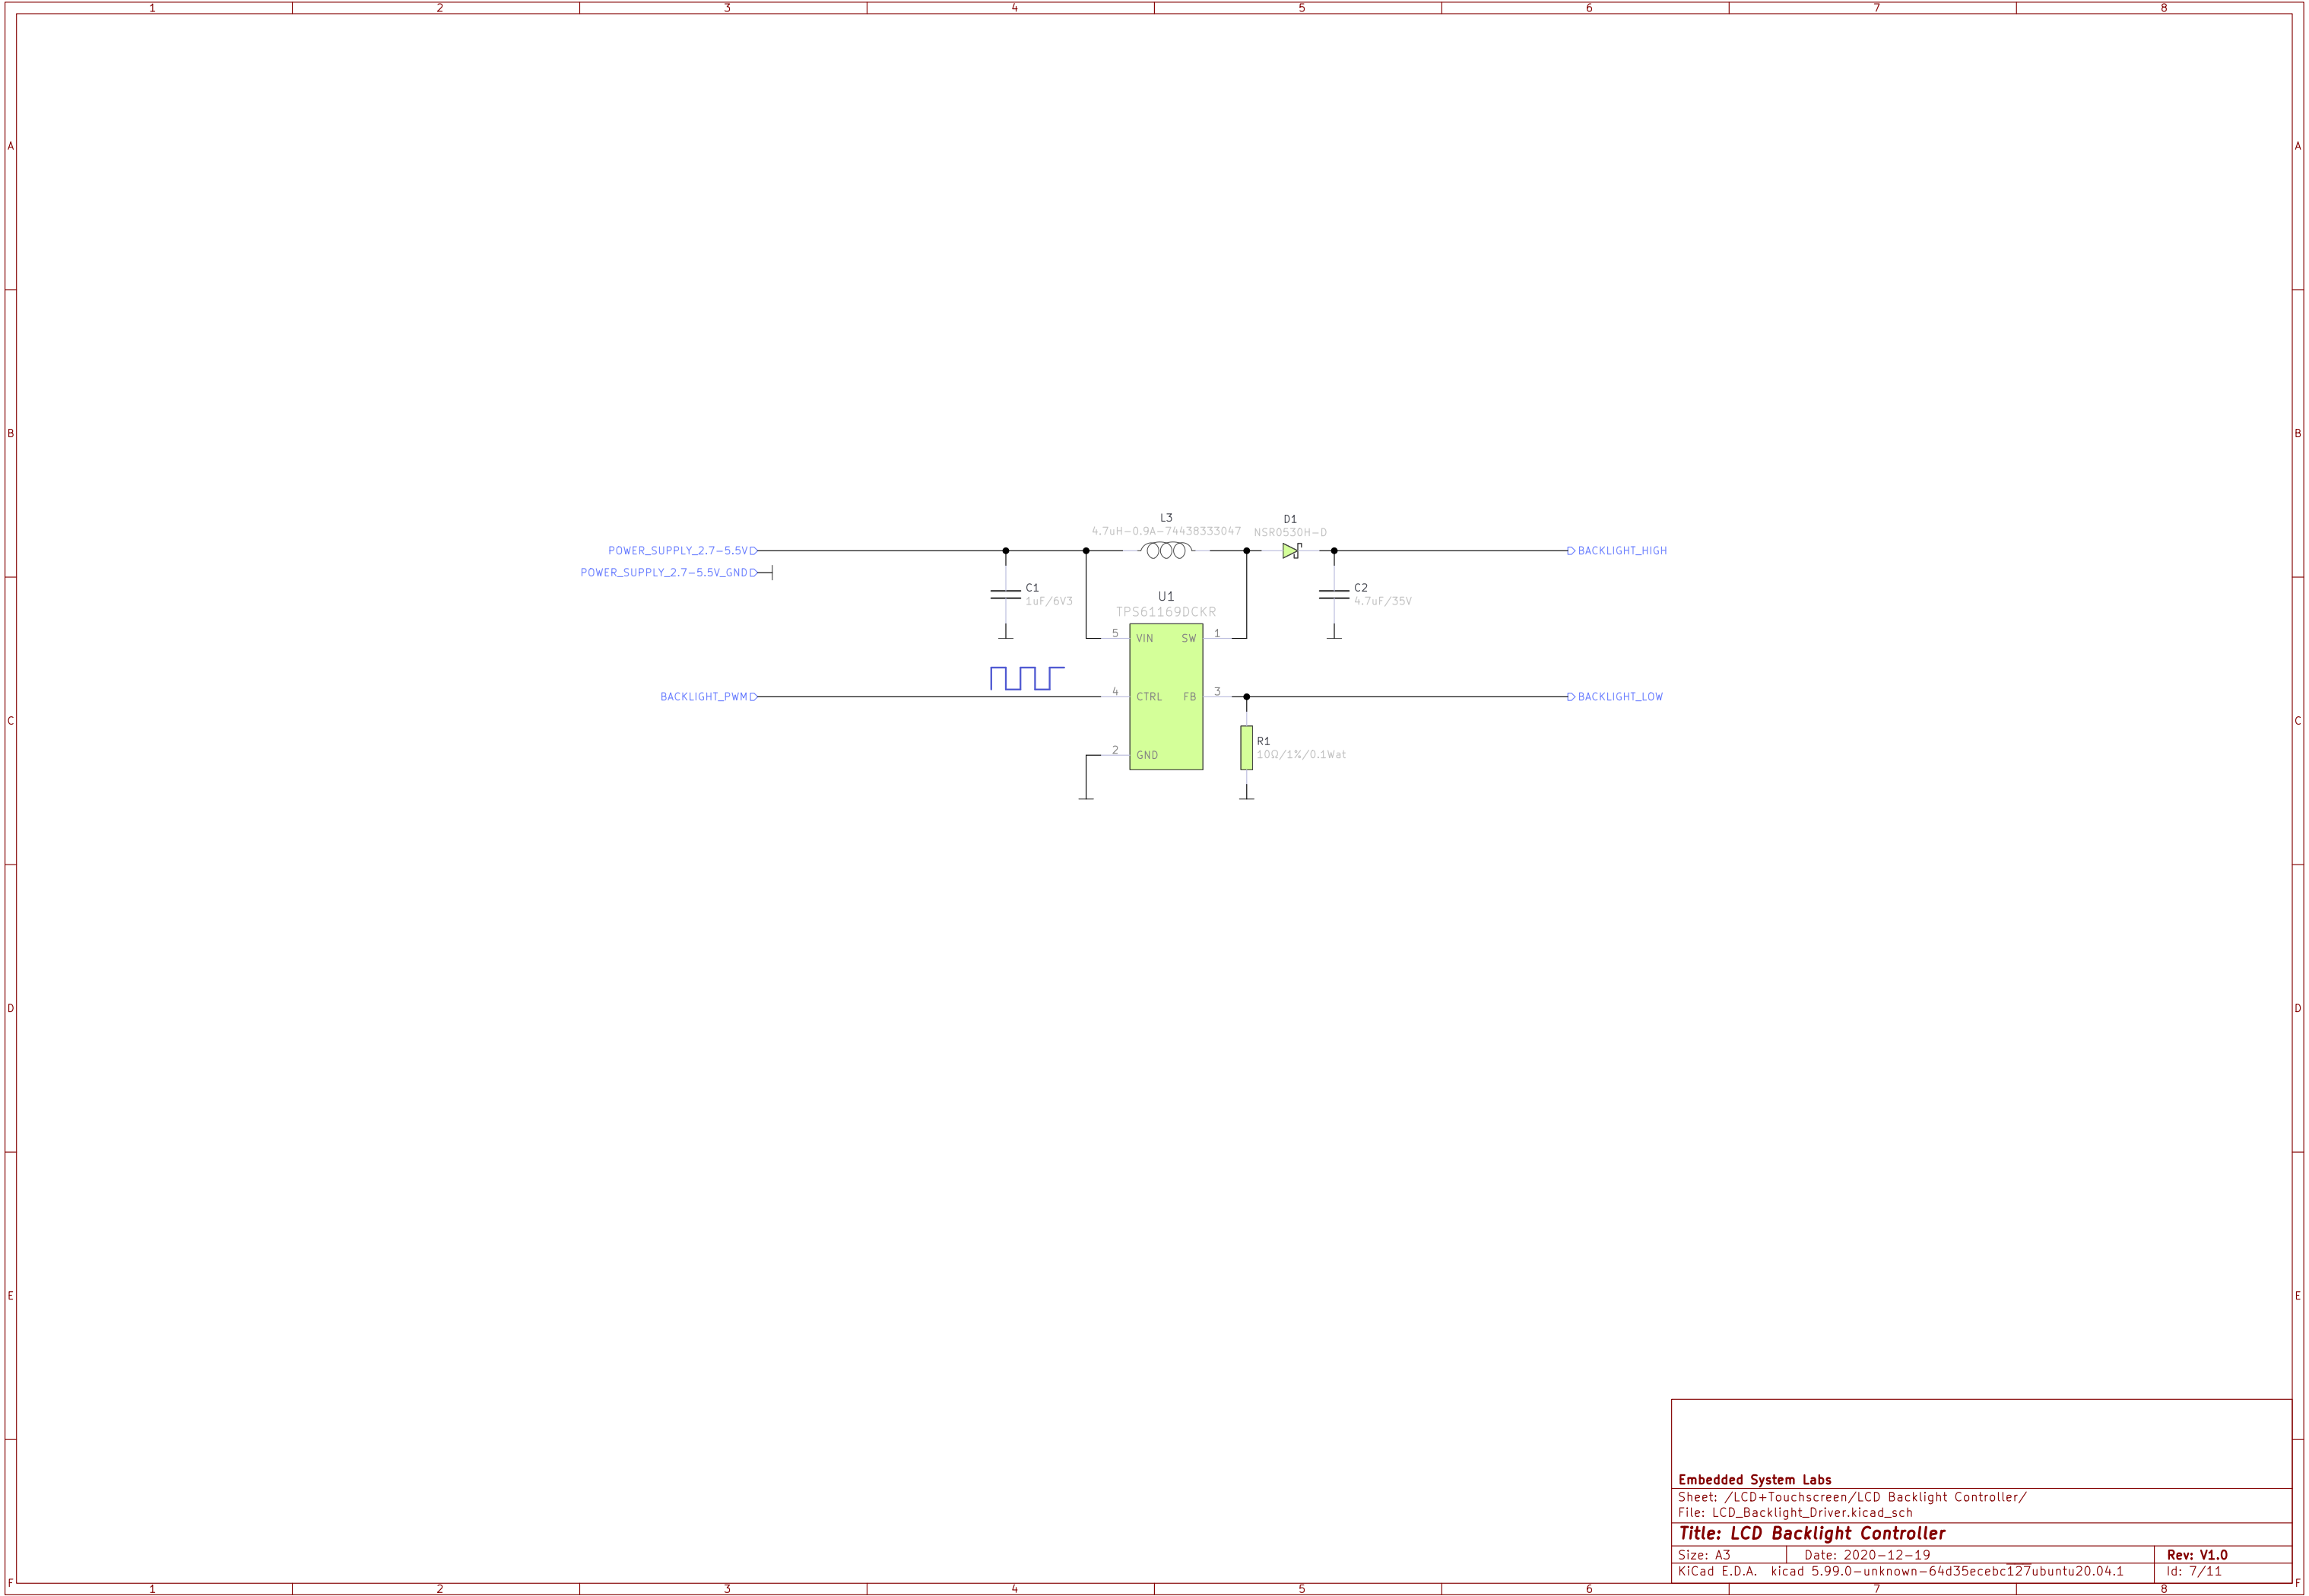

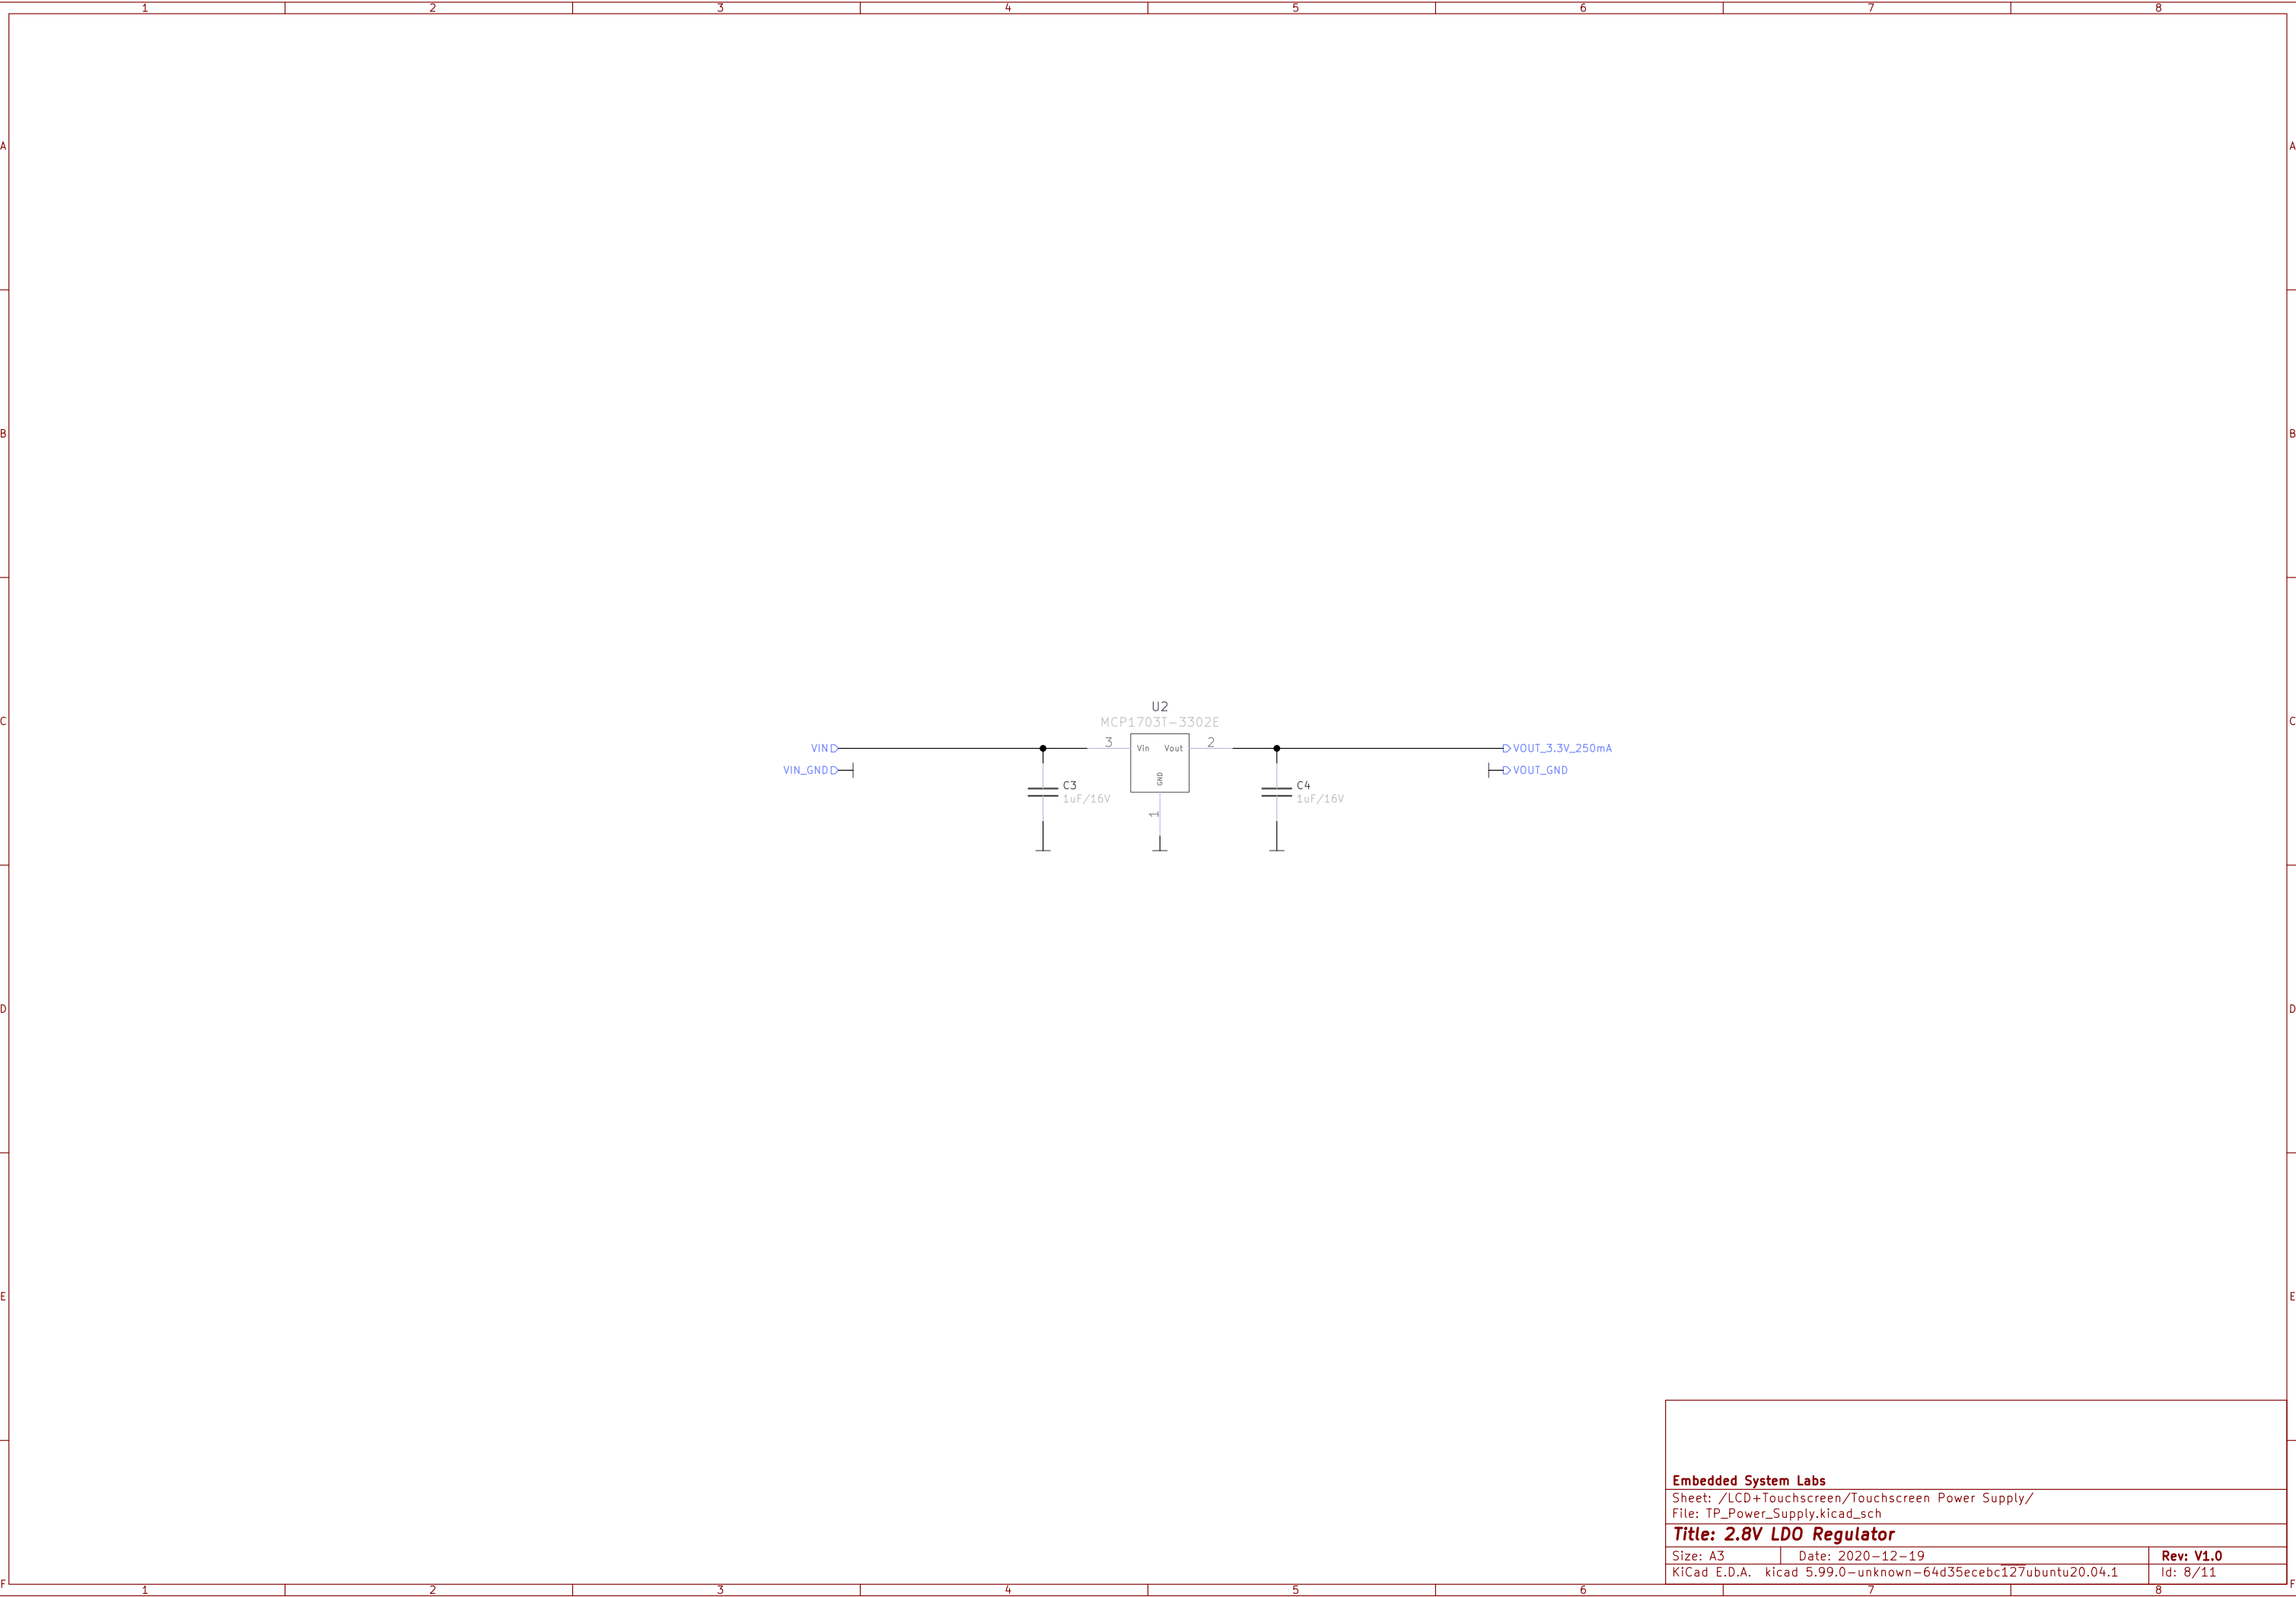

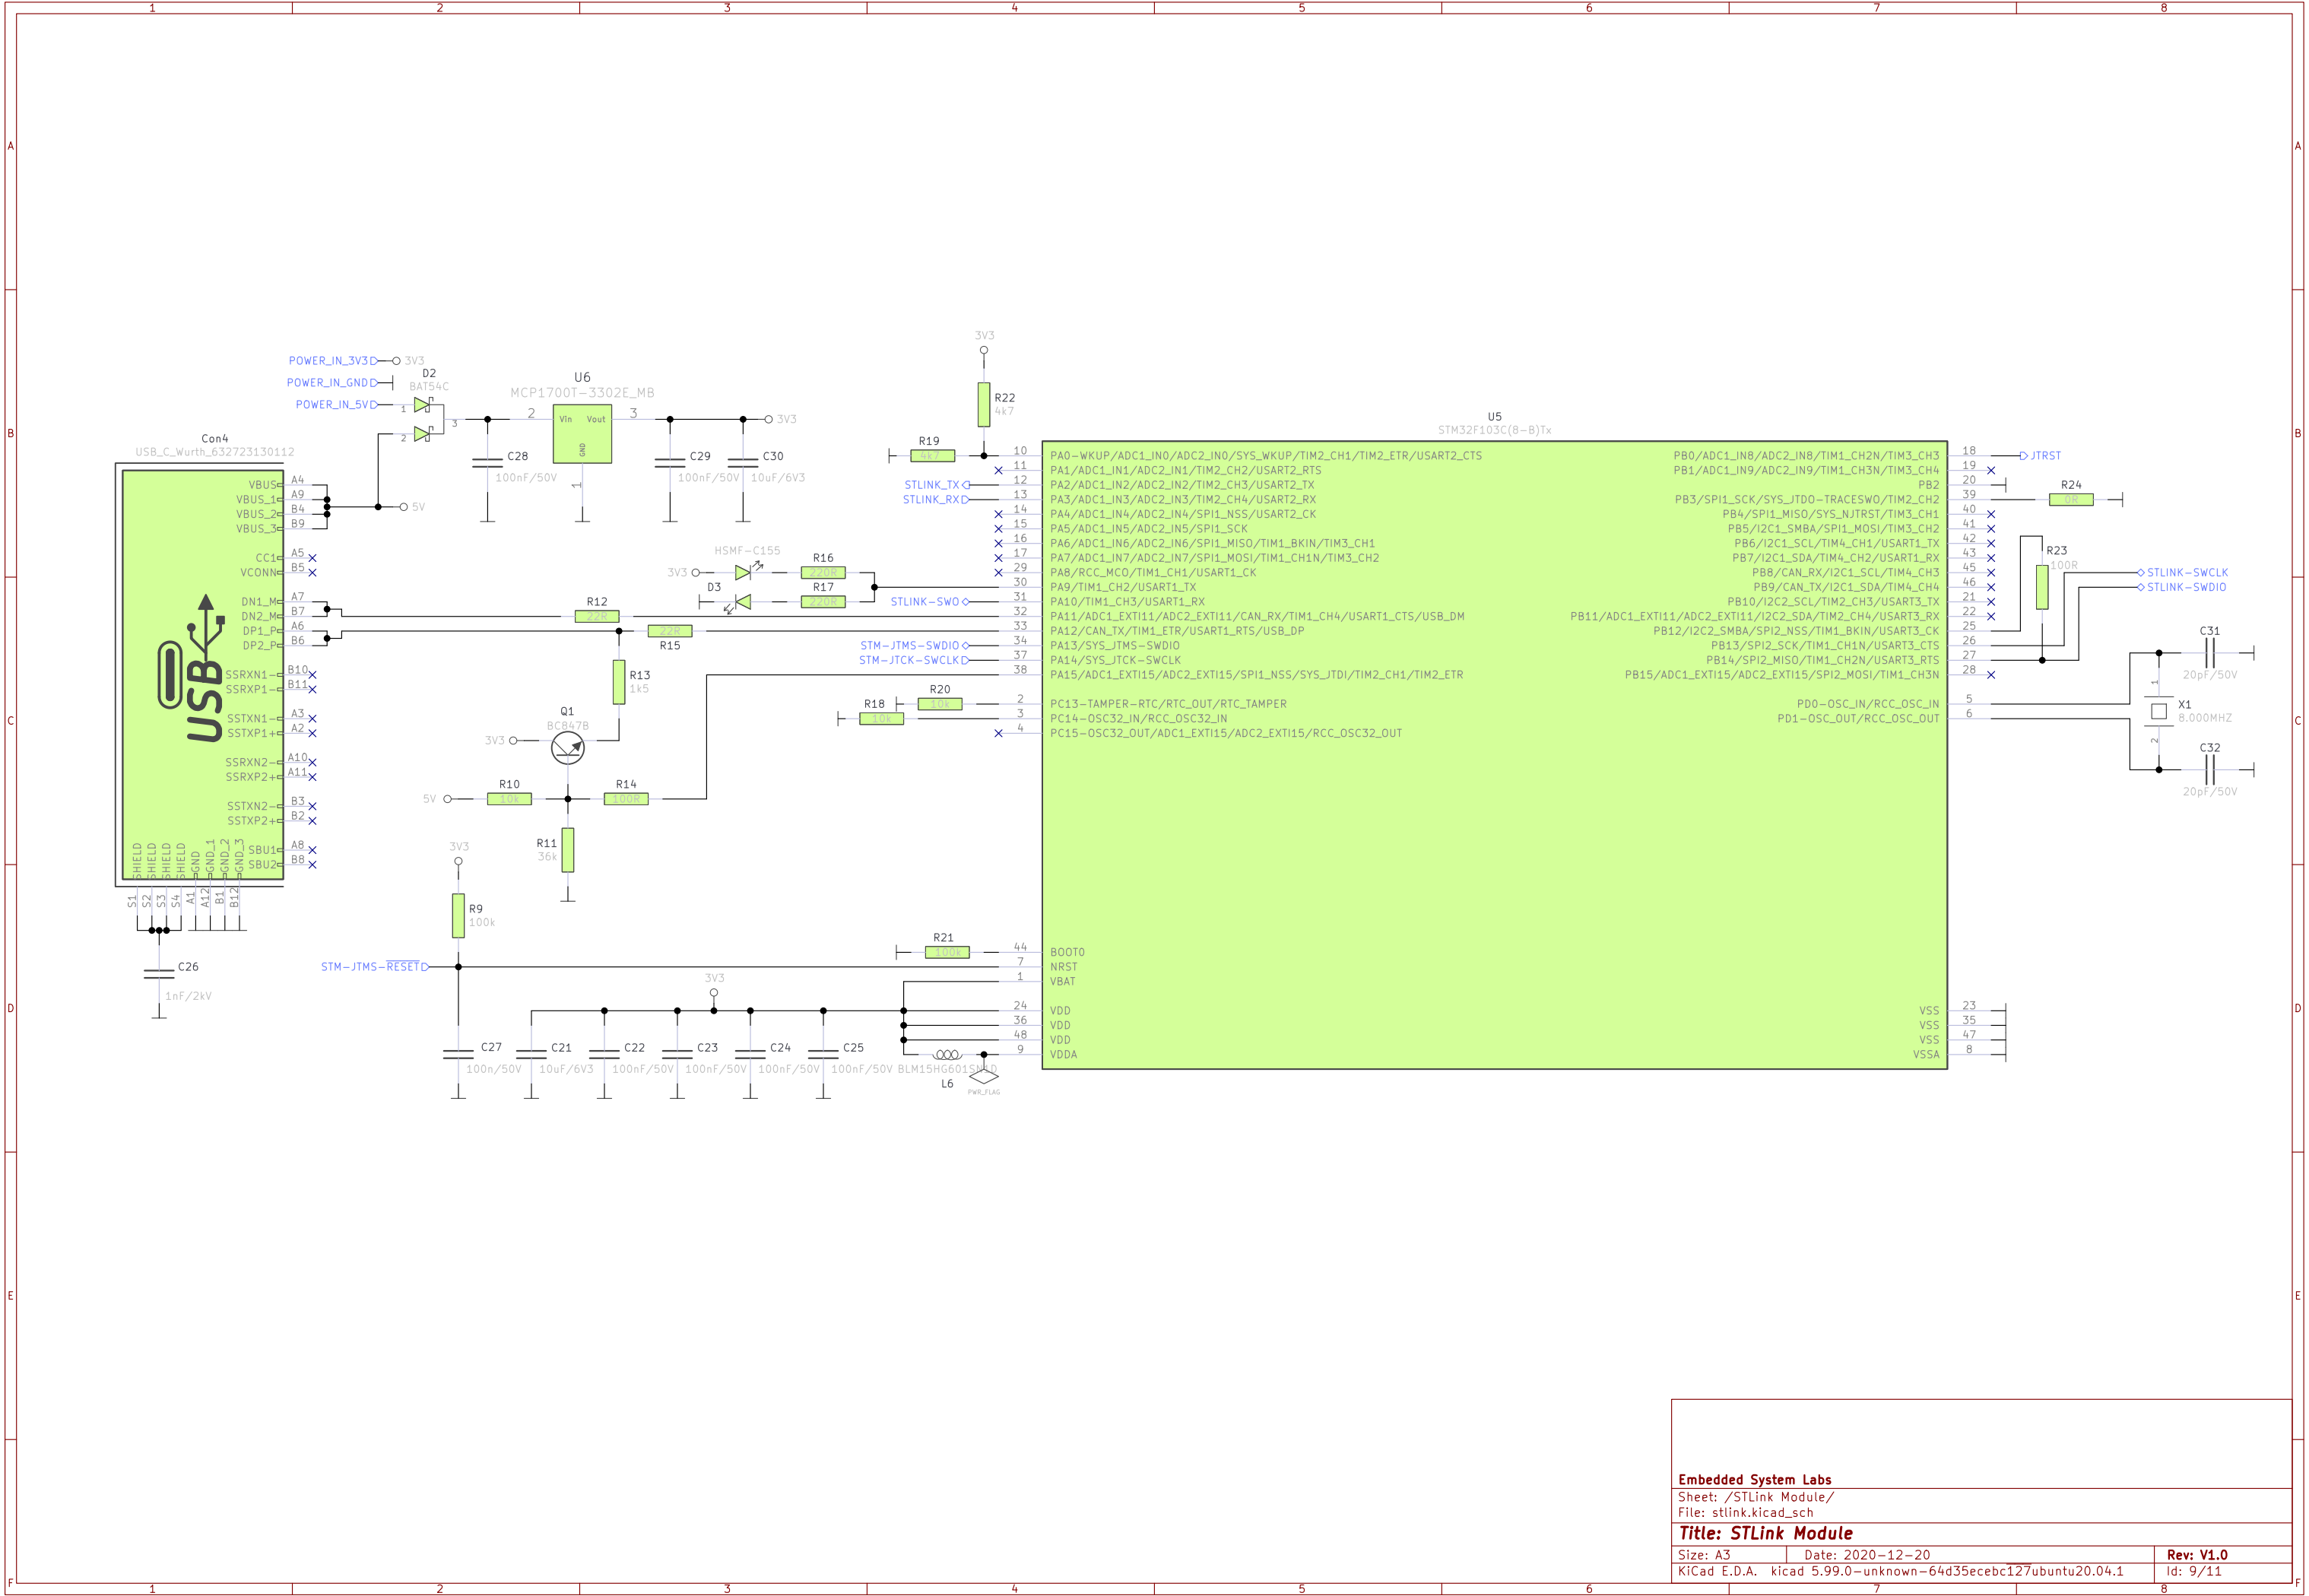

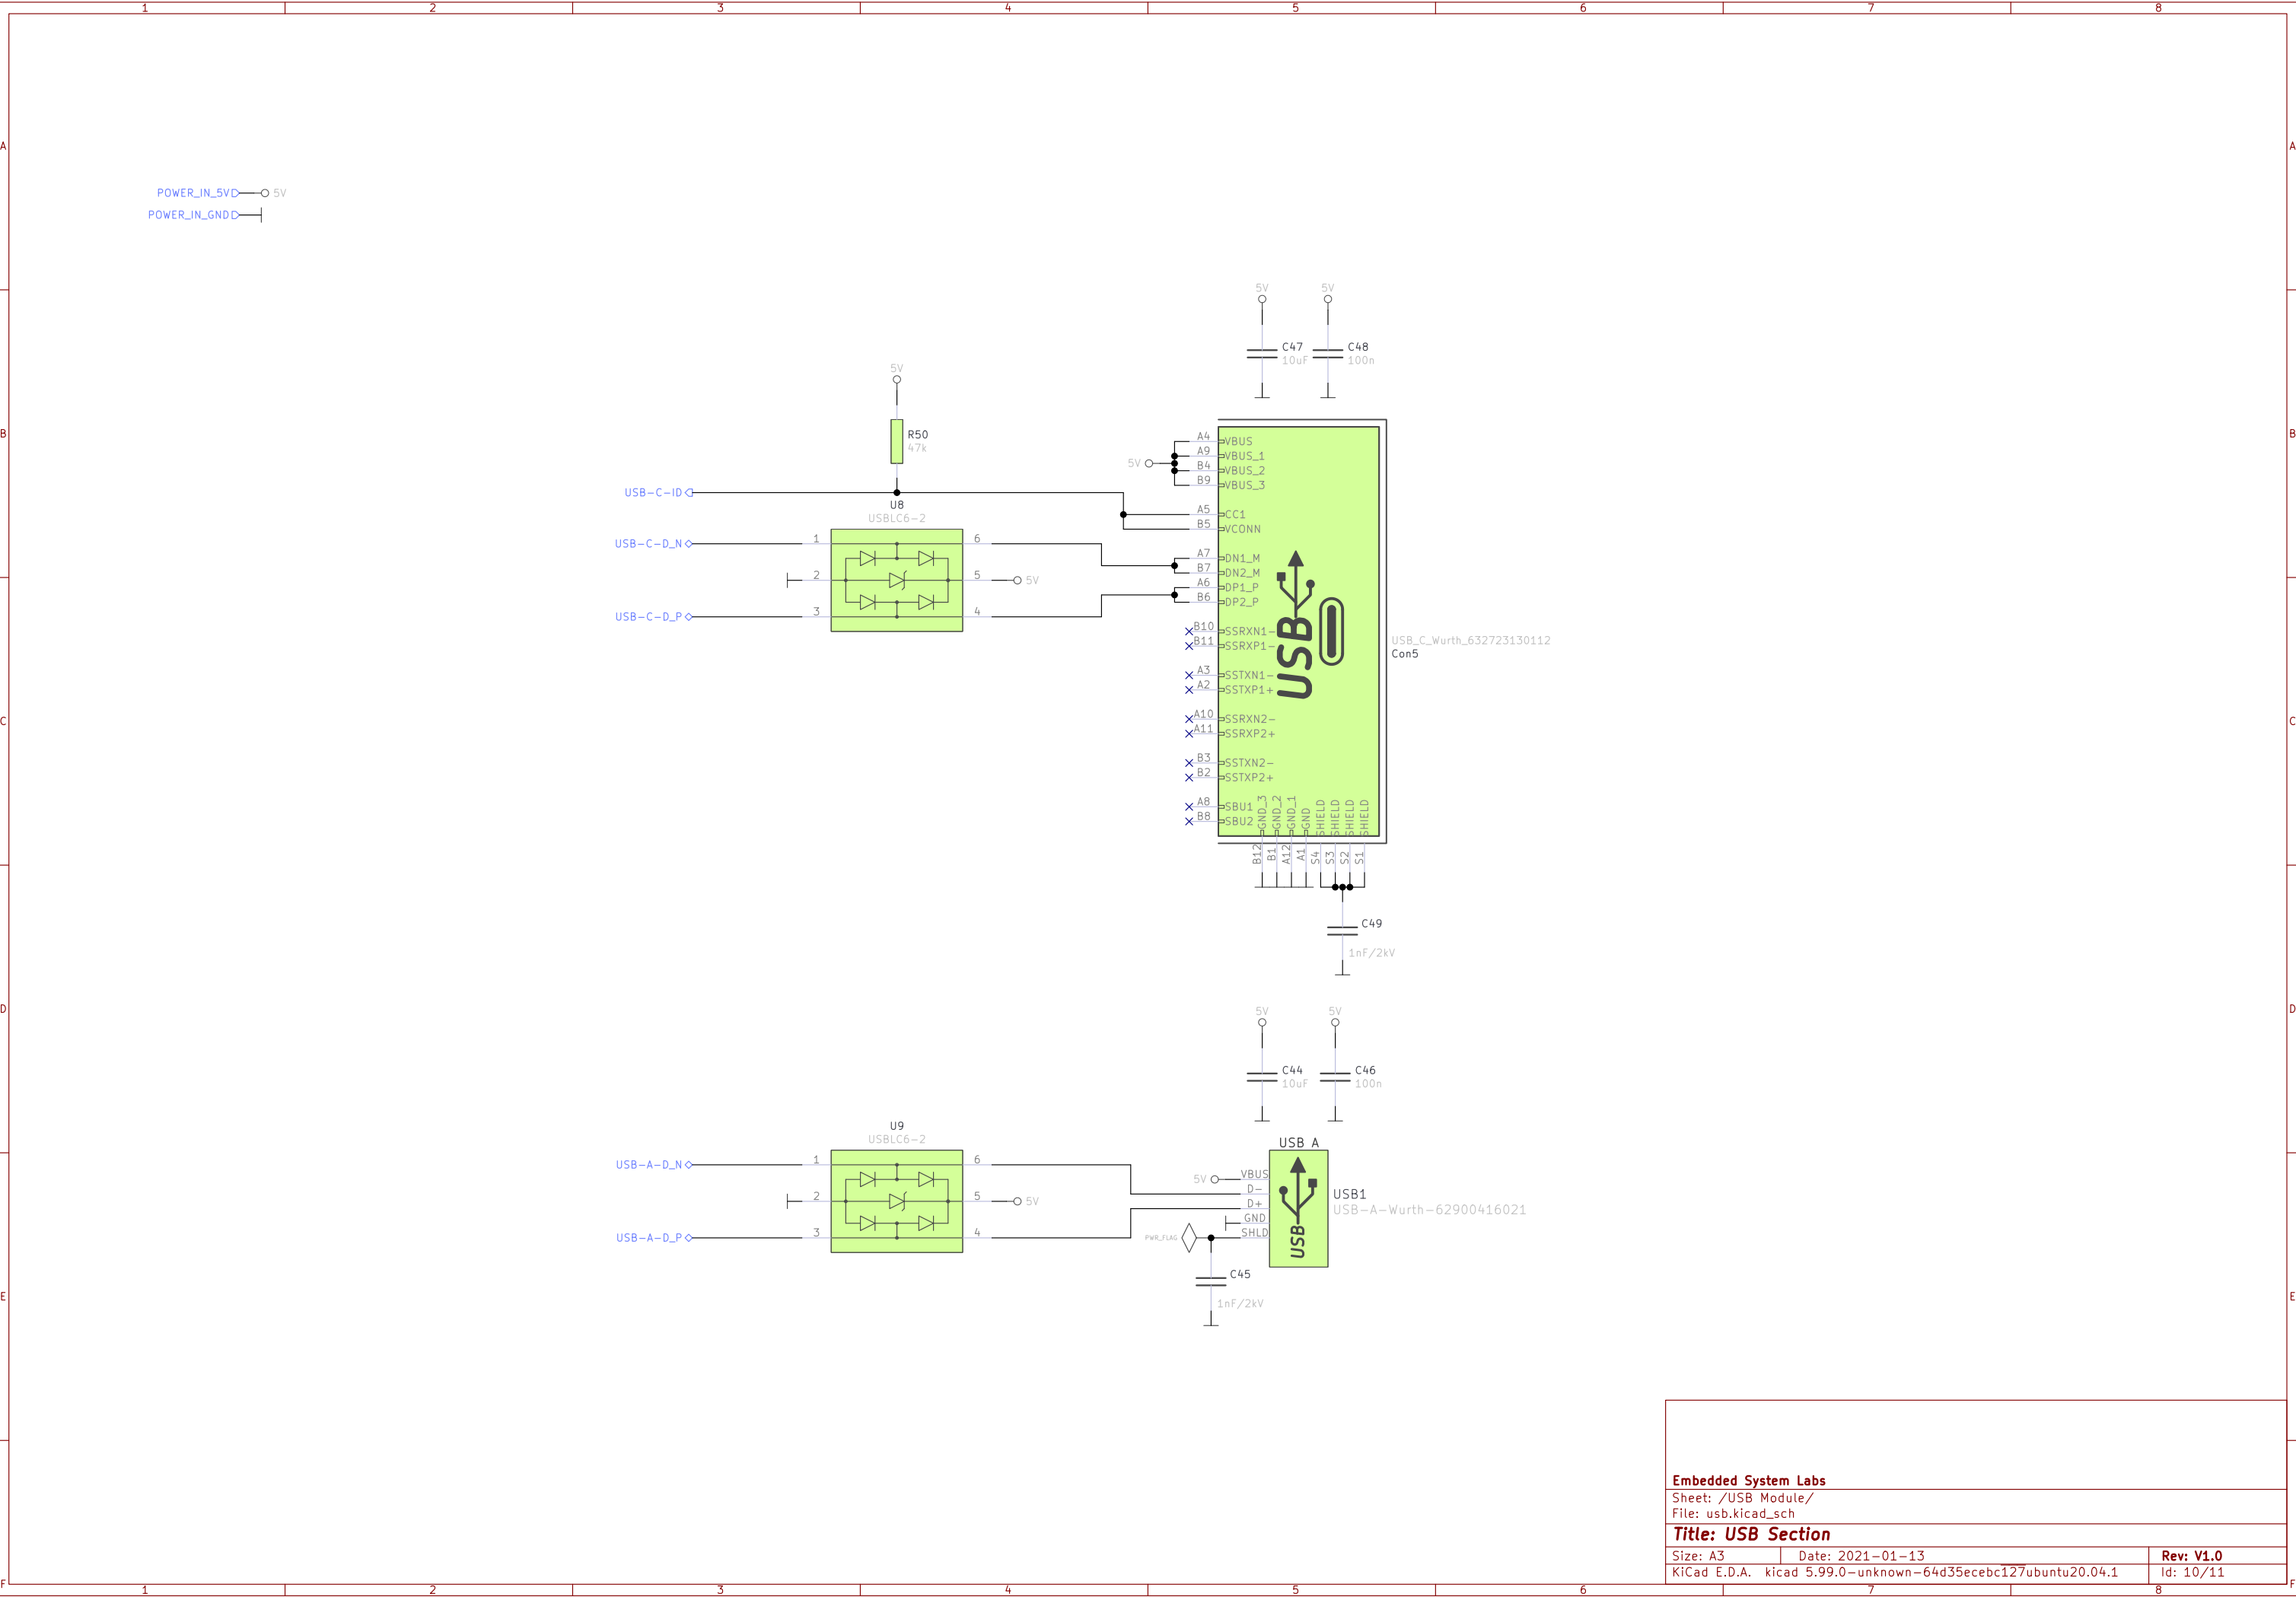

Embedded System Labs

Sheet: /USB Module/

File: usb.kicad_sch

Title: USB Section

Size: A3

Date: 2021-01-13

Rev: V1.0

KiCad E.D.A. kicad 5.99.0-unknown-64d35ecec127ubuntu20.04.1

Id: 10/11

