

8

7

6

5

4

3

2

1

NOTES (UNLESS SPECIFIED OTHERWISE):  

1.0 DESCRIPTION AND APPLICATION:  
1.1 ASSEMBLY TO BE USED IN A COMMERCIAL PRODUCT (INDOOR USE).  
  
2.0 APPLICABLE DOCUMENTATION:  
2.1 INTERPRET DRAWING PER ASME Y14.5-2009 DIMENSIONING AND TOLERANCING STANDARDS.  
  
3.0 REQUIREMENTS:  
3.1 DIMENSIONS ARE IN MILLIMETERS (MAXIMUM MATERIAL CONDITION)  
3.2 IF PROVIDED, ALL DIMENSIONS SHOWN SHALL BE CHECKED DURING FIRST ARTICLE INSPECTION. FAI MUST BE APPROVED FOR THE SPECIFIC REVISION OF THIS ASSEMBLY PRIOR TO SHIPMENT OF PARTS.  
3.3 DIMENSIONS INDICATED BY (X.XXX) ARE PROCESS CONTROL/MONITORING DIMENSIONS.  
3.4 DIMENSIONS IN PARENTHESIS "(X.XXX)" OR MARKED REFERENCE "X.XX REF" ARE DIMENSIONS WITHOUT TOLERANCE AND ARE FOR INFORMATION PURPOSE ONLY.  
3.5 UNLESS OTHERWISE NOTED GENERAL TOLERANCES: +/- .125 MM  
3.6 PARTS MUST BE FREE OF ANY FOREIGN MATERIAL, INCLUDING BUT NOT LIMITED TO: DIRT, CHIPS, OIL, AND OTHER CONTAMINANTS.  
3.7 NO CHANGES SHALL BE ALLOWED, REGARDLESS OF WHETHER SUCH CHANGE AFFECTS CHARACTERISTICS, WITHOUT PRIOR EXPLICIT APPROVAL BY PUMP STUDIOS AND/OR VOTINGWORKS.  
  
4.0 INSPECTION & SHIPPING REQUIREMENTS:  
4.1 VERIFY PART SAMPLES CONFORM TO DESIGN REQUIREMENTS USING STANDARD TEST EQUIPMENT AND VISUAL INSPECTION TECHNIQUES.  
4.2 PACKAGING FOR SHIPMENT: PART SHALL BE ADEQUATELY PROTECTED TO PREVENT DAMAGE IN TRANSIT AND HANDLING.  
4.3 VENDOR TO SUPPLY WITH EACH SHIPMENT: MATERIAL CERTIFICATION, SHIPPER DOCUMENTS WITH PART NUMBER, PART NAME, REVISION, LOT NUMBER, QUANTITY AND P.O. NUMBER.  
4.4 PACKAGING LABELS AND MATERIAL TRACEABILITY MUST CONFORM TO UL 746D.  
  
5.0 APPROVALS:  
5.1 SUPPLIER IS RESPONSIBLE TO ENSURE THIS PART OR ASSEMBLY IS FULLY COMPLIANT WITH THE EUROPEAN UNION (EU) RESTRICTION OF HAZARDOUS SUBSTANCES (ROHS) DIRECTIVE 2002/95/EC, LATEST REVISION, AT TIME OF SHIPMENT.  
5.2 SUPPLIER WILL FURNISH A CERTIFICATION OF COMPLIANCE (C OF C) WITH FIRST ARTICLES WHEN SPECIFICALLY REQUESTED.  
  
6.0 LOCTITE 425 THREAD-LOCKING ADHESIVE SHALL BE APPLIED PER MANUFACTURER RECOMMENDATION TO ALL THREADED HARDWARE AND/OR SCREWS, UNLESS OTHERWISE SPECIFIED.

REV. A

DESCRIPTION INITIAL RELEASE

CR # -

DATE 10/03/2024

SUBMITTED BY LPE

5  
1

4  
1

10  
1

3  
1

11  
4

6  
2

12  
1

13  
1


1  
1

9  
1

2  
1

8  
1

7  
1

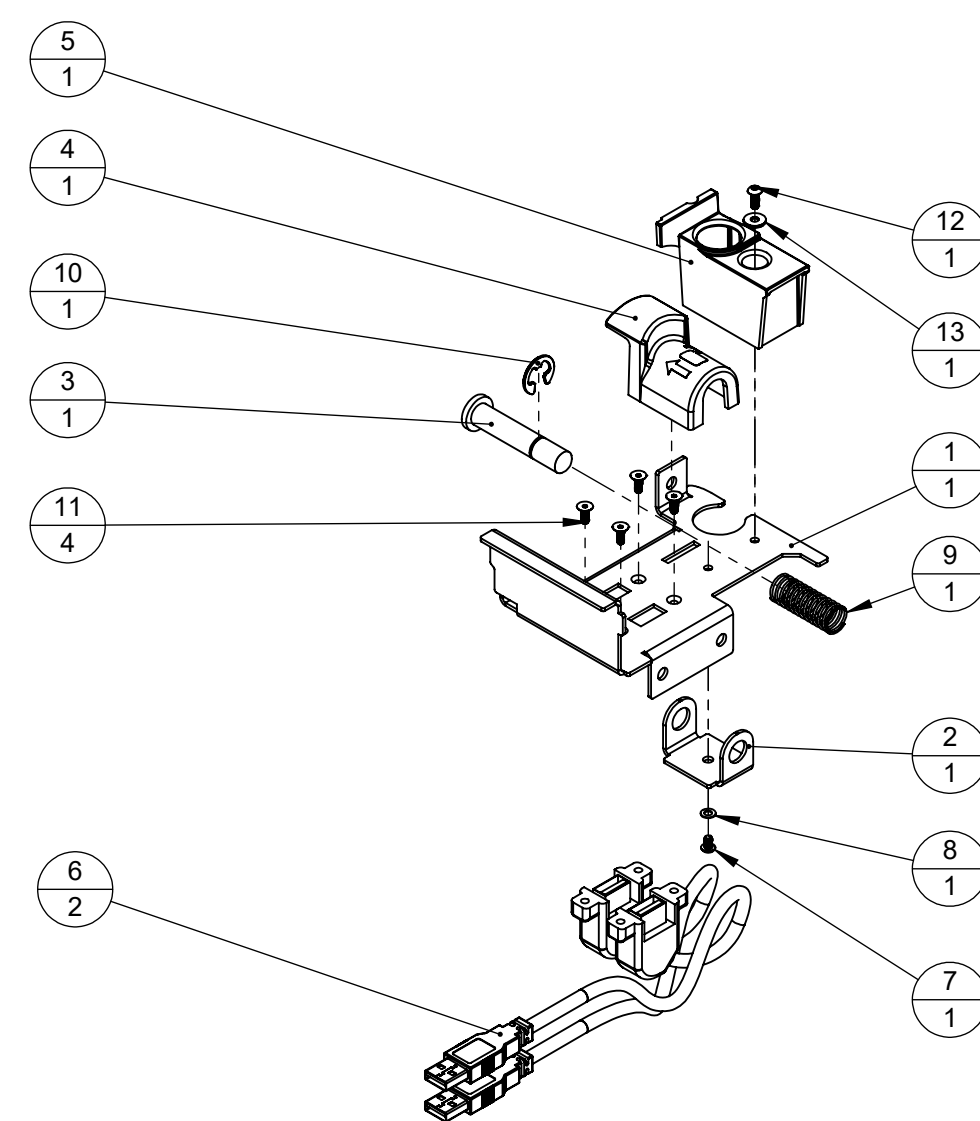

131VX~99-00111WASHER, OVERSIZED, M3, 9MM OD, ZINC-PLATED STEEL

121VX~99-00121M3X0.5PX8L, BHCS, ZINC-PLATED STEEL

114VX~99-001154-40X5/16"L, FHCS, 82°, BLACK-OXIDE STEEL

101VX~99-00130RETAINING RING, FOR 3/8" OD, BLACK-PHOSPHATE STEEL

91VX~99-00129SPRING, COMPRESSION, 1.25", 5.7LB

81VX~99-00131WASHER, M3, ZINC-PLATED STEEL

71VX~99-00120M3X0.5PX5L, BHCS, ZINC-PLATED STEEL

62TRIP-LITE~U324-001-APMTRIP-LITE PANEL MOUNT USB CONNECTOR

51VX~02-00048DISPLAY CABLE GUIDE

41VX~02-00034SLIDE BOLT SHROUD

31VX~02-00033SLIDE BOLT

21VX~02-00032BRACKET, SLIDE BOLT

11VX~02-00031PANEL, POLLWORKER

MATERIAL  
SEE BOM

FINISH  
SEE BOM

COLOR  
SEE BOM

EST. WEIGHT  
142.67

ENGINEER  
LPE

RELEASE DATE  
10/31/2024

UNLESS OTHERWISE SPECIFIED  
DIMENSIONS ARE IN MILLIMETERS  
DO NOT SCALE DRAWING


TOLERANCES: SEE NOTES

THIRD ANGLE  
PROJECTION

APPROVED BY  
EER

APPROVED DATE  
11/18/2024

CAD TYPE  
MULTI PART ASSEMBLY



DESCRIPTION  
ASSEMBLY, PANEL, POLLWORKER WITH BOLT

PART NUMBER  
VX~01-00007

REV.  
A

SIZE  
B

SCALE  
1:3

SHEET  
1 OF 1

8

7

6

5

4

3

2

1

8

7

6

5

4

3

2

1

8

7

6

5

4

3

2

1