

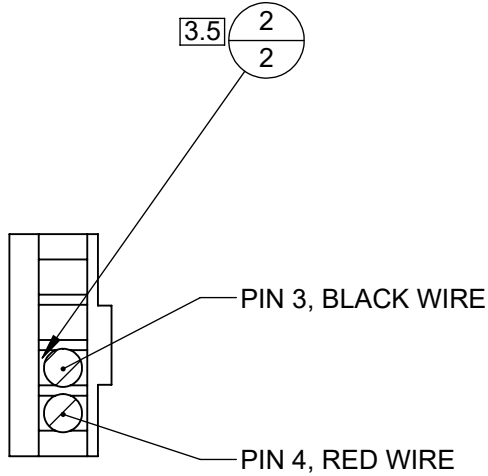
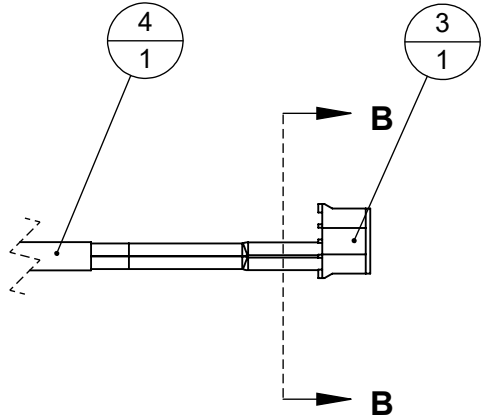
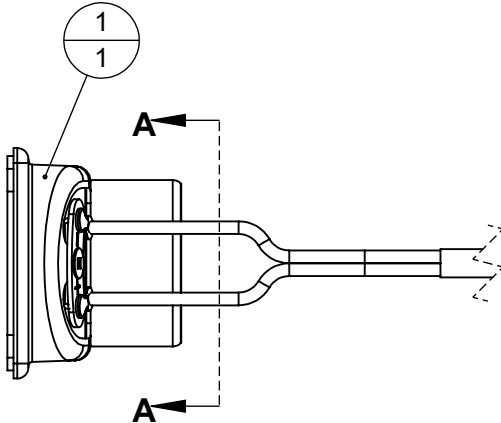


NOTES (UNLESS SPECIFIED OTHERWISE):

- 1.0 DESCRIPTION AND APPLICATION:
1.1 ASSEMBLY TO BE USED IN A COMMERCIAL PRODUCT (INDOOR USE).
- 2.0 APPLICABLE DOCUMENTATION:
2.1 INTERPRET DRAWING PER ASME Y14.5-2009 DIMENSIONING AND TOLERANCING STANDARDS.
- 3.0 REQUIREMENTS:
3.1 IF PROVIDED, ALL DIMENSIONS SHOWN SHALL BE CHECKED DURING FIRST ARTICLE INSPECTION. FAI MUST BE APPROVED FOR THE SPECIFIC REVISION OF THIS ASSEMBLY PRIOR TO SHIPMENT OF PARTS.
3.2 DIMENSIONS INDICATED BY (X.XXX) ARE PROCESS CONTROL/MONITORING DIMENSIONS.
3.3 PARTS MUST BE FREE OF ANY FOREIGN MATERIAL, INCLUDING BUT NOT LIMITED TO: DIRT, CHIPS, OIL, AND OTHER CONTAMINANTS.
3.4 NO CHANGES SHALL BE ALLOWED, REGARDLESS OF WHETHER SUCH CHANGE AFFECTS CHARACTERISTICS, WITHOUT PRIOR EXPLICIT APPROVAL BY PUMP STUDIOS AND/OR VOTINGWORKS.
- 3.5 ASSEMBLE AND INSTALL CRIMP CONTACTS INTO CONNECTOR HOUSING PER MANUFACTURER'S RECOMMENDATION.
3.6 ADD LABEL AT INDICATED LOCATION WITH PRINTED BLACK TEXT "VX~02-00082-A" PER MANUFACTURER RECOMMENDATION. MINIMUM FONT HEIGHT = 2 MM.
3.7 SOLDER WIRE TO SPEAKER TERMINALS AS INDICATED.

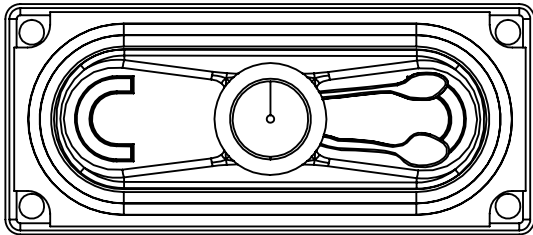


SECTION B-B
SCALE 3 : 1

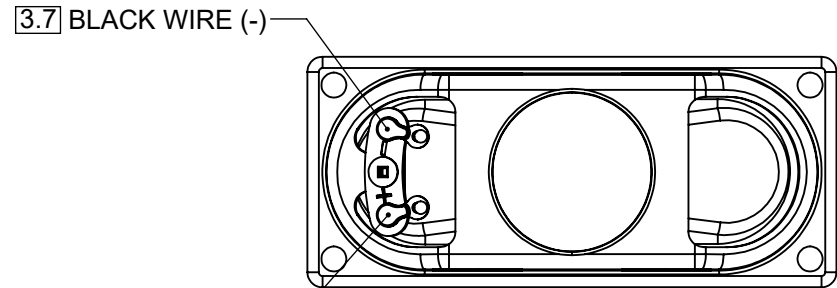

3.7 BLACK WIRE (-)



3.7 RED WIRE (+)

SECTION A-A
SCALE 1 : 1

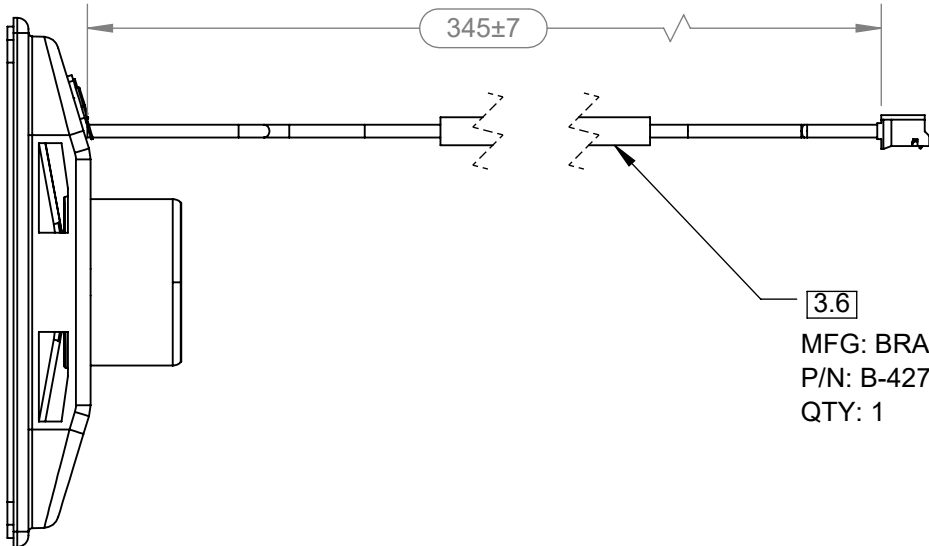

3.6
MFG: BRADY
P/N: B-427
QTY: 1

4	1	ALPHA-WIRE~M13190 SL005	CABLE, 2-CONDUCTOR, 24AWG, FOIL SHIELD
3	1	JST~PH4-R	CONNECTOR RECEPTACLE HOUSING, 4POS, 2.00MM
2	2	JST~SPH-002T-P0.5S	CONNECTOR SOCKET CRIMP, 24-30 AWG, TIN
1	1	PUI~AS07004PO-R	SPEAKER, 4 OHM, 2W, 86DB
ITEM NO.	QTY.	PART NUMBER	DESCRIPTION

MATERIAL SEE BOM	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS DO NOT SCALE DRAWING			
FINISH SEE BOM	TOLERANCES: SEE NOTES			
COLOR SEE BOM	THIRD ANGLE PROJECTION 	DESCRIPTION CABLE ASSEMBLY, DISPLAY TO SPEAKER		
EST. WEIGHT 78.09	APPROVED BY PAK	PART NUMBER VX~02-00082		REV. A
ENGINEER DBC	APPROVED DATE 10/24/2024	SHEET 1 OF 1		
RELEASE DATE 10/11/2024	CAD TYPE MULTI PART ASSEMBLY	SIZE B	SCALE 1:2	