



SupremeRAID™ **Supreme100 Workstation**

Supreme100 Workstation

POWERED BY AMD EPYC™ 8004 & SupremeRAID™ SR-1001

SPECIFICATION



Dimension: 602.6 x 175.0 x 438.0 (mm); (With bezel)

CPU: EPYC 8004 series up to 165W (optional fan solution if TDP higher than 165W)

DDR: 8 DIMM slots (1DPC/2DPC) up to 768 GB @4800 MHz

Front Panel: 1 x System reset, 1 x power on/off, 2 x USB 3.2, 1 x Audio combo

Drive Bay: 8 x 2.5" hot-swapped NVMe SSD + 4 x 3.5" hot-swapped HDD (optional)

Expansion Slot: 2 x PCIe5.0 / CXL1.1 x16

1 x PCIe5.0 / CXL1.1 x8

2 M.2 (PCIe5.0 x4)

GPU Card: Up to 450W GPU card Double slot x 1

Rear Panel: 1 x DB15 VGA, 2 x USB 3.2, 2 x 1GbE_RJ45, 1 x MLAN, 2 x SFP28 (25GbE),
1 x UID button with LED, 1 x PWR button with LED

System Cooling: Front: 1 x 120mm fan / 2600 RPM

Rear: 1 x 80mm fan / 8200 RPM for SSD

Power Supply: ATX 1200W

OS Support List

Linux Distribution	x86_64	Windows Version	Arch
AlmaLinux	8.5, 8.6, 8.7 8.8 (kernel 4.18)	Windows Server 2019	x86_64
CentOS	7.9 (Kernel 3.10 and 4.18), 8.3, 8.4, 8.5 (Kernel 4.18)	Windows Server 2022	x86_64
Debian	11.6 (Kernel 5.10), 12 (Kernel 6.1)	Windows 11	x86_64
openSUSE Leap	15.2, 15.3 (Kernel 5.3)		
Oracle Linux	7.9 (RHCK 3.10, and UEK 5.4), 8.7 (RHCK 4.18 and UEK 5.15), 9.1 (RHCK 5.14 and UEK 5.15)		
Proxmox VE	8.1 (Kernel 6.5)		
RHEL	7.9 (Kernel 3.10 or 4.18), 8.3, 8.4, 8.5, 8.6, 8.7, 8.8 (Kernel 4.18), 9.0, 9.1 (Kernel 5.14)		
Rocky Linux	8.5, 8.6, 8.7, 8.8 (Kernel 4.18)		
SLES	15 SP2, 15 SP3 (Kernel 5.3)		
Ubuntu	20.04.0-20.04.4 (Kernel 5.4 and 5.15), 22.04.0-22.04.2 (Kernel 5.15)		

RAID Level support Raid 0/1/5/10 in Linux & Windows

- 1.System suspension and hibernation are currently unsupported due to a limitation in the NVIDIA driver.
- 2.SAS/SATA/NVMe-oF drives are not supported in the Windows driver.

Undeniable Features

Supreme100 is engineered for applications where **speed** and **data integrity** are critical.




Robust Data Protection

Equipped **4 to 8 SSDs**
for the most secure data
protection



Unbeatable Performance

The only workstation on the
market delivers **100GB/s**
throughput



Economical and Powerful

Equipped
up to **450w**
mid/ high-end GPU



Keep Noise Level Down

Operating noise
~ 60dB
Suitable for **indoor office**

不可忽視的特色

Supreme100專為速度及資料完整性的需求工作而打造




健全的 資料保護

專為資料安全而生
可搭載**4- 8顆SSDs**



所向無敵的 效能表現

市面上唯一
可提供**100GB/s 流量**
之效能表現



強而有力 且經濟實惠



可搭載最高**450W**
中高階**GPU卡**



運作中 維持低噪音

運行中聲量
可維持**約60分貝**
適用於**室內辦公室**

Potential market

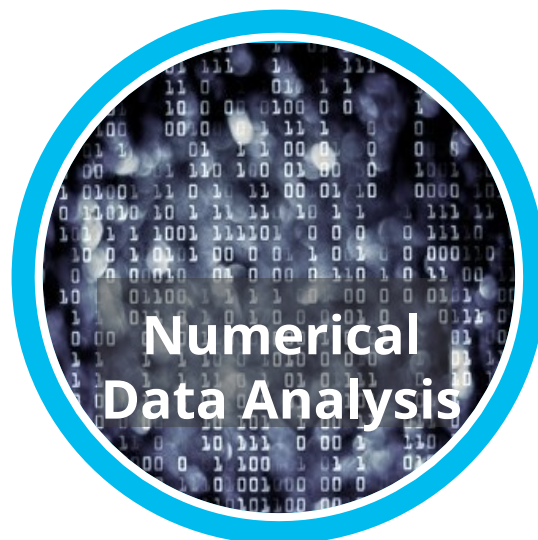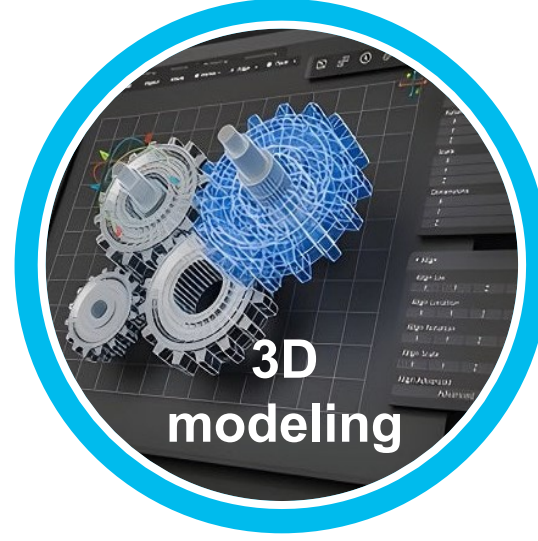



案例 :3D建模


專案背景：國土測繪局在進行3D地理實體建模時，搭配工作站Xeon + SAS HDD RAID，搭配建模軟體SVSGeoModeler

客戶痛點：
效能不佳運算時間太長。即使提升CPU也無法改善整體效能

解決方案：使用Intel i9 CPU 加上 SupremeRAID™ Solution 加上4顆 NVMe SSD，提升2倍效能

推廣特點：

- 突破數據IO瓶頸、節省一半運算時間
- 進一步提升CPU效能可以再提升整體效能

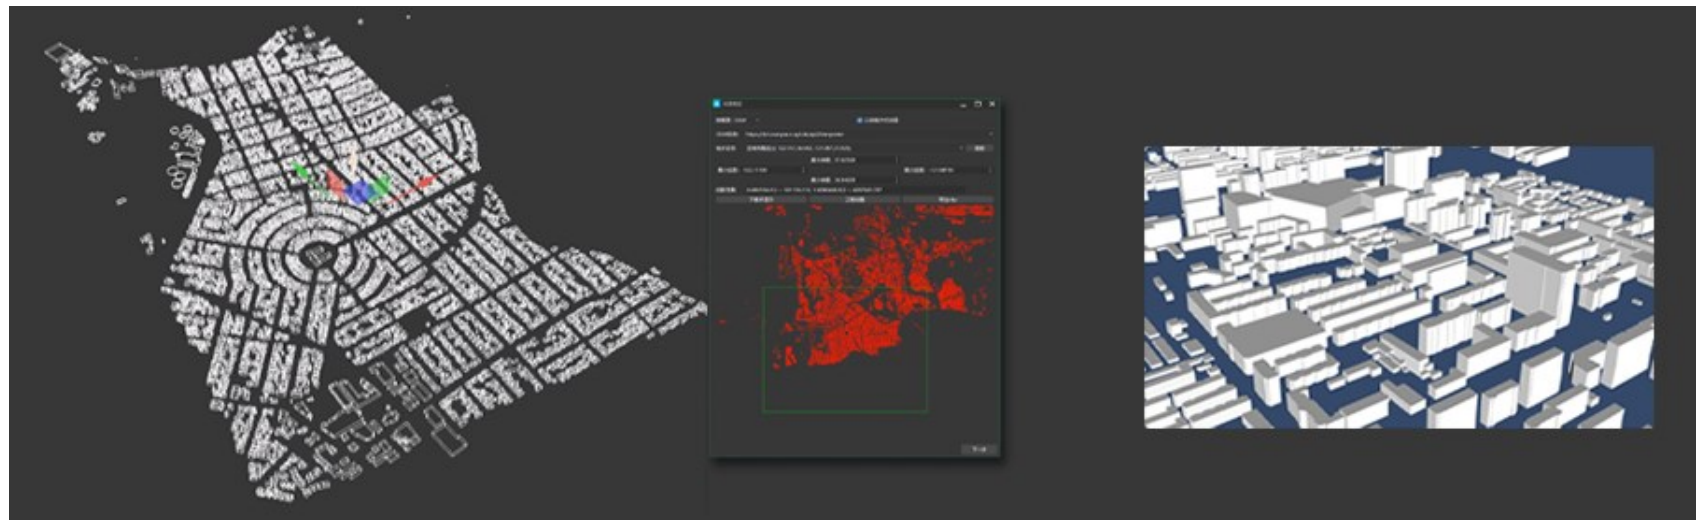

	Workstation Xeon + SAS HDD RAID	Intel i9 CPU + SupremeRAID™ + 4NVMe SSD	
自由網空三	3小時3分鐘	1小時17分鐘	2.3x time saving
約束網空三	1 小時16分鐘	32分鐘	2.3x time saving
三維模型建立	108小時12分鐘	55小時30分鐘	1.9x time saving




3D Modeling

Background: Map service conducting 3D geographical modeling, using the workstation Xeon + SAS HDD RAID and SVSGeoModeler software

Pain point: Poor performance results in a long processing time. Even increasing the CPU cannot improve overall performance

Solution: Use Intel i9 CPU +SupremeRAID™ Solution with 4 NVMe SSD to enhance 2 times performance.

- Features:**
- Improve the data IO performance will upgrade computing performance and save the half computing time.
 - After breaking data IO bottleneck, upgrade CPU performance can enhance overall performance more.

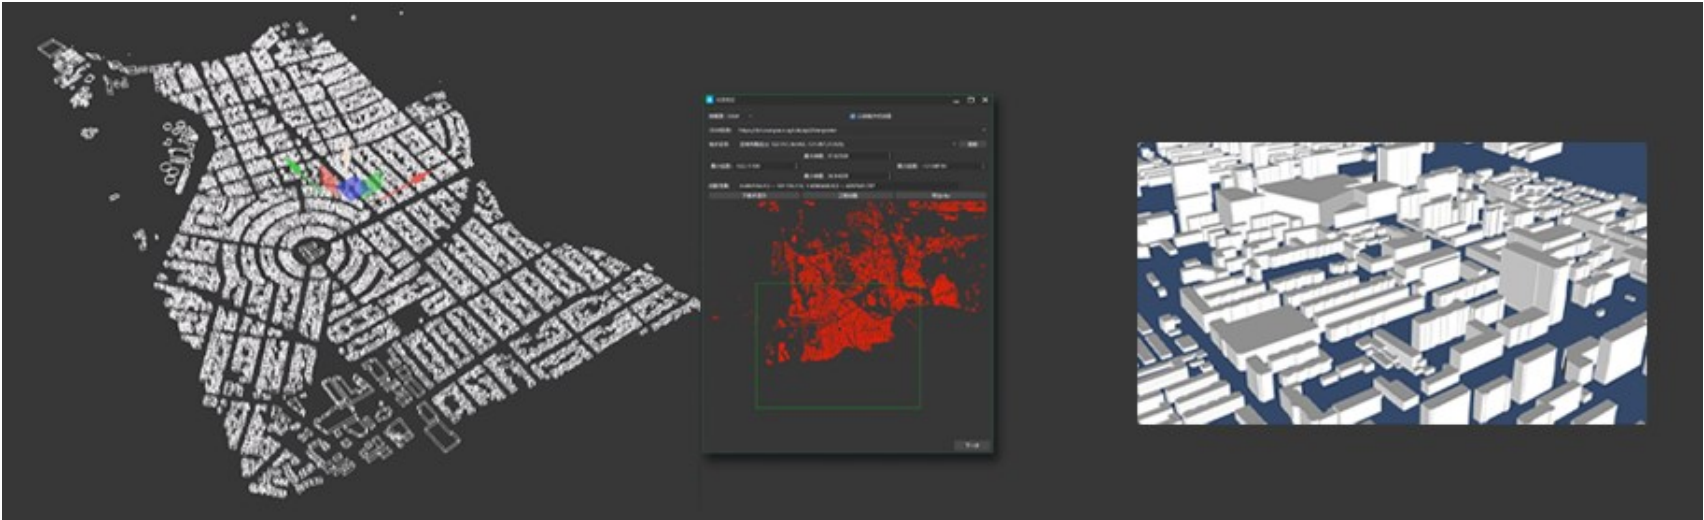

	Workstation Xeon + SAS HDD RAID	Intel i9 CPU + SupremeRAID™ + 4NVMe SSD	
Free Mesh Space	3hrs 3mins	1hr 17mins	2.3x time saving
Constrained Mesh Space	1hr 16 mins	32mins	2.3x time saving
3D Model Creation	108hrs12 mins	55hrs 30mins	1.9x time saving



Questions?
Thank You

PRESENTED BY:

MK

[GRAIDTECH.COM](https://graidtech.com)