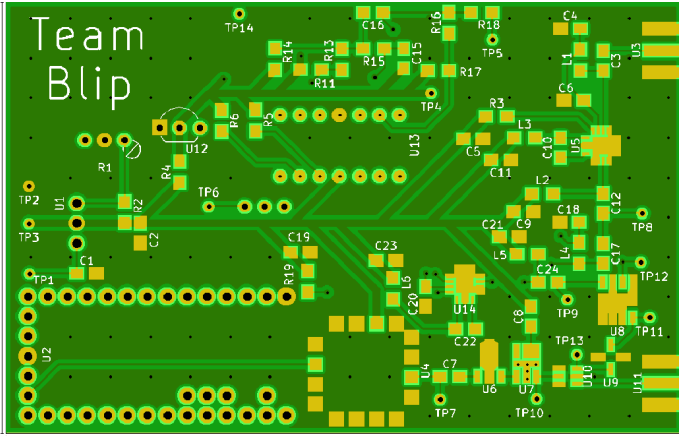
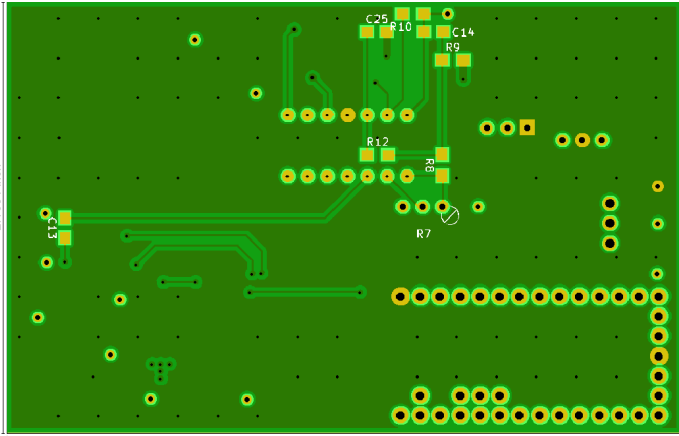


Name	kulxuw38.zip	Id.	18596 - QED OK
Report Generated on	Feb 9, 2018 12:46:42 PM	Customer	InstantDFM
Board Id			

## Single PCB View - Original

Top View	Bottom View
	

## Summary - General - Original

PCB Size	3.3858 inch x 2.1654 inch	Copper Layers	2
PCB Thickness	62.00 mil	Solder Mask	Both
Customer Panel Size		Solder Mask Color	Green
SMD Pads Top	177	Legend	Both
SMD Pads Bottom	28	Legend Color	White
SMD Density Top	24 SMD/inch <sup>2</sup>	Peeloff Mask	None
SMD Density Bottom	4 SMD/inch <sup>2</sup>	Carbon Mask	None
Number of Nets	84	Drill Hole Density	23 Holes/inch <sup>2</sup>
Electrical Test	Double Sided	Holes in SMD Pads	Yes
Max. Aspect Ratio on PTH	4.1	Edge Connectors	No
		Surface Finish	

## Summary - Copper Layers - Original







Layer Type	Min. Line Width	Min. Copper Width	Min. Ring	Min. Clr. to Copper	Min. Clr. to Plated Hole	Min. Clr. to NPTH	Min. Clr. to Outline
	mil	mil	mil	mil	mil	mil	mil
Outer	<sup>1</sup> 6.34	<sup>2</sup> 6.34	<sup>3</sup> 7.50	<sup>4</sup> 6.38	<sup>5</sup> 13.88	<sup>6</sup>	7.99

## Summary - Sequences - Original


Type	Sequences	Tools	Min. End Dia.	Max. End Dia.	Holes	Min. Ring on Outer	Min. Ring on Inner	Min. Clr. Hole to Copper
			mil	mil		mil	mil	mil
Blind	0							
Buried	0							
PTH	1	6	15.00	43.31	171	7.50		13.88
Plated (Total)	1	6	15.00	43.31	171	7.50		13.88
NPTH	0							
Total	1	6	15.00	43.31	171	7.50		13.88

Name	kulxuw38.zip	Id.	18596 - QED OK
Report Generated on	Feb 9, 2018 12:46:42 PM	Customer	InstantDFM
Board Id			

## Summary Minimum Design Characteristics - Locations - Original

<b>1</b>  Q2-F.Cu_gbr ⊕ x: 3993.58 mil y: -2487.99 mil  <b>Min. Line Width Outer Layers</b> <b>6.34 mil</b>	<b>2</b>  Q2-F.Cu_gbr ⊕ x: 3993.58 mil y: -2487.99 mil  <b>Min. Copper Width Outer Layers</b> <b>6.34 mil</b>
<b>3</b>  Q2-F.Cu_gbr ⊕ x: 3531.18 mil y: -2585.59 mil  <b>Min. Ring Outer Layers</b> <b>7.50 mil</b>	<b>4</b>  Q2-F.Cu_gbr ⊕ x: 3541.61 mil y: -2660.2 mil  <b>Min. Clearance Outer Layers</b> <b>6.38 mil</b>
<b>5</b>  Q2-F.Cu_gbr ⊕ x: 3541.61 mil y: -2663.95 mil  <b>Min. Clr. to Plated Outer Layers</b> <b>13.88 mil</b>	<b>6</b>  Q2-F.Cu_gbr ⊕ x: 4759.78 mil y: -1546.5 mil  <b>Clr. to Outline Outer Layers</b> <b>7.99 mil</b>

## Stackup - Original

	Q2-F.Cu_gbr Q2-B.Cu_gbr
---	----------------------------

Pressing Stages	1
-----------------	---

Name	kulxuw38.zip	Id.	18596 - QED OK
Report Generated on	Feb 9, 2018 12:46:42 PM	Customer	InstantDFM
Board Id			

## Copper Layers - Original

File	Pos.	Min. Line Width	Min. Copper Width	Min. Ring	Min. Clr. to Copper	Min. Same Net spacing	Min. Clr. to Plated Hole	Min. Clr. to NPTH	Min. Clr. to Outline	Copper Area	
		mil	mil	mil	mil	mil	mil	mil	mil	inch <sup>2</sup>	%
Q2-F.Cu_gbr	1	6.34	6.34	7.50	6.38	>20.00	13.88		7.99	5.6337	77
Q2-B.Cu_gbr	2	6.34	6.34	7.50	18.16	>20.00	25.66		25.00	6.2410	85

## Drill Tools - Original

File	Tool Nr.	Span	Type	Method	Filled Via	Countered	Dia.	Tol. Min	Tol. Plus	Holes (in PCB)	Moves (in PCB)	Double Hits (in File)	Predrill Hits (in File)	Min. Ring on Outer	Min. Ring on Inner	Min. Pad Size
							mil	mil	mil					mil	mil	mil
Q2_drl	2	1-2	PTH	unknown	unknown	unknown	15.00	0.00	0.00	106	0	0	0	7.50		30.00
Q2_drl	3	1-2	PTH	unknown	unknown	unknown	15.75	0.00	0.00	2	0	0	0	9.84		35.43
Q2_drl	4	1-2	PTH	unknown	unknown	unknown	25.00	0.00	0.00	14	0	0	0	10.00		45.00
Q2_drl	5	1-2	PTH	unknown	unknown	unknown	31.50	0.00	0.00	9	0	0	0	12.60		56.70
Q2_drl	6	1-2	PTH	unknown	unknown	unknown	39.37	0.00	0.00	37	0	0	0	19.68		78.73
Q2_drl	7	1-2	PTH	unknown	unknown	unknown	43.31	0.00	0.00	3	0	0	0	11.81		66.93

## Sequences - Original

Span	Type	Tools	Min. End Dia.	Max. End Dia.	Holes	Min. Ring on Outer	Min. Ring on Inner	Min. Ring on Outer NPTH	Min. Ring on Inner NPTH	Min. Clr. Hole to Copper	Min. Clr. Hole to Outline	Min. Clr. Slot to Outline
			mil	mil		mil	mil	mil	mil	mil	mil	mil
1-2	PTH	6	15.00	43.31	171	7.50				13.88	46.83	disabled
All	Plated	6	15.00	43.31	171	7.50				13.88	46.83	disabled
All	All	6	15.00	43.31	171	7.50				13.88	46.83	disabled

## Rout Tools - Original

File	Tool Nr.	Type	Tool Dia.	End Dia.	Draw Length	Nibble Count
			mil	mil	mil	
Q2_drl	1	PTH	unknown	9.84	112.99	129

## Routed Holes - Original

File	Hole Nr.	Instances	X Size	Y Size	Draw Length	Nibble Count
			mil	mil	mil	
Q2_drl	1	2	17.87	9.84	8.03	9
Q2_drl	2	2	17.95	9.84	8.11	9
Q2_drl	3	10	17.91	9.84	8.07	9

Name	kulxuw38.zip	Id.	18596 - QED OK
Report Generated on	Feb 9, 2018 12:46:42 PM	Customer	InstantDFM
Board Id			

## Solder Mask - Original

Side	Min. Ring on Cu Defined Pads	Min. Ring on SM Defined Pads	Min. Clr. Mask to Mask	Min. Web	Min. Clr. Mask to Copper	Fully Covered Via Holes	Partly Covered Via Holes
	mil	mil	mil	mil	mil		
Top	7.87		5.51	1.25	1.27	Yes	No
Bottom	7.87		5.51	>10.00	9.04	Yes	No

## Files - Original

Initial	Renamed	Format	Function	Position	Color
Q2-F.SilkS.gbr	Q2-F.SilkS_gbr	ger274x	silk	top	white
Q2-F.Mask.gbr	Q2-F.Mask_gbr	ger274x	mask	top	green
Q2-F.Cu.gbr	Q2-F.Cu_gbr	ger274x	outer	1	
Q2-B.Cu.gbr	Q2-B.Cu_gbr	ger274x	outer	2	
Q2-B.Mask.gbr	Q2-B.Mask_gbr	ger274x	mask	bottom	green
Q2-B.SilkS.gbr	Q2-B.SilkS_gbr	ger274x	silk	bottom	white
Q2.drl	Q2_drl	excellon2	plated	1-2	
Q2-Edge.Cuts.gbr	Q2-Edge.Cuts_gbr	ger274x	cad_outline	none	

## Input Remarks - Original

Gerber import: Invalid coincident draw, continuing without cleanup 'Q2-B.Cu.gbr'
Gerber import: Self-intersecting contours are detected, continuing with an interpretation of the contours. 'Q2-B.Cu.gbr' (at line 1641)
Gerber import: Self-intersecting contours are detected, continuing with an interpretation of the contours. 'Q2-F.Cu.gbr' (at line 3617)

## Comments - Original

--