

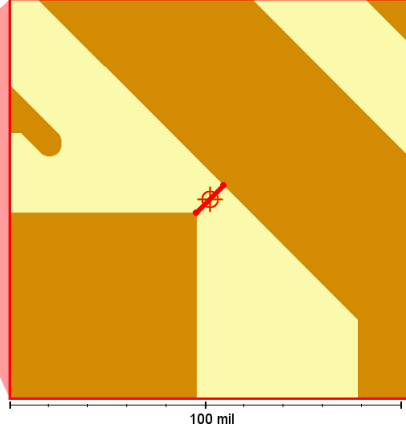
Single PCB View - OriginalSummary - General - Original

Summary - Copper Layers - Original

Summary - Sequences - OriginalIntegr8tor v2017.05-170524

Name	dwo9s9aw.zip	Id.	18548 - QED OK
Report Generated on	Feb 8, 2018 2:03:50 PM	Customer	InstantDFM
Board Id			

Summary Minimum Design Characteristics - Locations - Original

1  Q2-F.Cu_gbr ⊕ x: 3063.39 mil y: -1508.35 mil Min. Line Width Outer Layers 6.34 mil 	2  Q2-B.Cu_gbr ⊕ x: 2525.12 mil y: -1328.61 mil Min. Copper Width Outer Layers 3.99 mil 
3  Q2-F.Cu_gbr ⊕ x: 1500.0 mil y: -3100.0 mil Min. Ring Outer Layers 7.50 mil 	4  Q2-F.Cu_gbr ⊕ x: 3170.76 mil y: -2458.61 mil Min. Clearance Outer Layers 9.49 mil 
5  Q2-F.Cu_gbr ⊕ x: 4392.13 mil y: -2775.66 mil Min. Clr. to Plated Outer Layers 20.96 mil 	6  Q2-F.Cu_gbr ⊕ x: 4841.34 mil y: -2927.76 mil Clr. to Outline Outer Layers 5.51 mil 

Stackup - Original



Pressing Stages

1

Name	dwo9s9aw.zip	Id.	18548 - QED OK
Report Generated on	Feb 8, 2018 2:03:50 PM	Customer	InstantDFM
Board Id			

Copper Layers - Original

File	Pos.	Min. Line Width	Min. Copper Width	Min. Ring	Min. Clr. to Copper	Min. Same Net spacing	Min. Clr. to Plated Hole	Min. Clr. to NPTH	Min. Clr. to Outline	Copper Area	
		mil	mil	mil	mil	mil	mil	mil	mil	inch ²	%
Q2-F.Cu_gbr	1	6.34	6.34	7.50	9.49	0.50	20.96		5.51	5.2073	74
Q2-B.Cu_gbr	2	10.00	3.99	7.50	17.24	>20.00	24.74		21.42	5.8388	83

Drill Tools - Original

File	Tool Nr.	Span	Type	Method	FilledVia	Countered	Dia.	Tol. Min	Tol. Plus	Holes (in PCB)	Moves (in PCB)	Double Hits (in File)	Predrill Hits (in File)	Min. Ring on Outer	Min. Ring on Inner	Min. Pad Size
							mil	mil	mil					mil	mil	mil
Q2_drl	2	1-2	PTH	unknown	unknown	unknown	15.00	0.00	0.00	98	0	0	0	7.50		30.00
Q2_drl	3	1-2	PTH	unknown	unknown	unknown	15.75	0.00	0.00	4	0	0	0	9.84		35.43
Q2_drl	4	1-2	PTH	unknown	unknown	unknown	31.50	0.00	0.00	9	0	0	0	12.60		56.70
Q2_drl	5	1-2	PTH	unknown	unknown	unknown	39.37	0.00	0.00	42	0	0	0	19.68		78.73
Q2_drl	6	1-2	PTH	unknown	unknown	unknown	43.31	0.00	0.00	3	0	0	0	11.81		66.93

Sequences - Original

Span	Type	Tools	Min. End Dia.	Max. End Dia.	Holes	Min. Ring on Outer	Min. Ring on Inner	Min. Ring on Outer NPTH	Min. Ring on Inner NPTH	Min. Clr. Hole to Copper	Min. Clr. Hole to Outline	Min. Clr. Slot to Outline
			mil	mil		mil	mil	mil	mil	mil	mil	mil
1-2	PTH	5	15.00	43.31	156	7.50				20.96	41.10	disabled
All	Plated	5	15.00	43.31	156	7.50				20.96	41.10	disabled
All	All	5	15.00	43.31	156	7.50				20.96	41.10	disabled

Rout Tools - Original

File	Tool Nr.	Type	Tool Dia.	End Dia.	Draw Length	Nibble Count
			mil	mil	mil	
Q2_drl	1	PTH	unknown	9.84	112.99	129

Routed Holes - Original

File	Hole Nr.	Instances	X Size	Y Size	Draw Length	Nibble Count
			mil	mil	mil	
Q2_drl	1	2	17.87	9.84	8.03	9
Q2_drl	2	2	17.95	9.84	8.11	9
Q2_drl	3	10	17.91	9.84	8.07	9

Name	dwo9s9aw.zip	Id.	18548 - QED OK
Report Generated on	Feb 8, 2018 2:03:50 PM	Customer	InstantDFM
Board Id			

Solder Mask - Original

Side	Min. Ring on Cu Defined Pads	Min. Ring on SM Defined Pads	Min. Clr. Mask to Mask	Min. Web	Min. Clr. Mask to Copper	Fully Covered Via Holes	Partly Covered Via Holes
	mil	mil	mil	mil	mil		
Top	5.51		5.51	1.25	7.40	Yes	No
Bottom	7.87		5.51	>10.00	9.04	Yes	No

Files - Original

Initial	Renamed	Format	Function	Position	Color
Q2-F.SilkS.gbr	Q2-F.SilkS_gbr	ger274x	silk	top	white
Q2-F.Mask.gbr	Q2-F.Mask_gbr	ger274x	mask	top	green
Q2-F.Cu.gbr	Q2-F.Cu_gbr	ger274x	outer	1	
Q2-B.Cu.gbr	Q2-B.Cu_gbr	ger274x	outer	2	
Q2-B.Mask.gbr	Q2-B.Mask_gbr	ger274x	mask	bottom	green
Q2-B.SilkS.gbr	Q2-B.SilkS_gbr	ger274x	silk	bottom	white
Q2.drl	Q2_drl	excellon2	plated	1-2	
Q2-Edge.Cuts.gbr	Q2-Edge.Cuts_gbr	ger274x	cad_outline	none	

Input Remarks - Original

Gerber import: Self-intersecting contours are detected, continuing with an interpretation of the contours. 'Q2-B.Cu.gbr' (at line 3133)

Comments - Original

--