

P 30 FSE

Product Sheet

MADE IN
FRANCE

The Flax Evo range, known for its sonic purity, stands as the ambassador of Focal's craftsmanship. Always striving for excellence, it is enriched by the P 30 FSE subwoofer. This low-frequency reinforcement is designed for easy integration, thanks to its profile that offers a shallow depth. It fits perfectly into confined spaces while delivering deep and precise bass.



Key points

- Shallow and lightweight
- Made in France in the Focal workshops
- Robust design and quality materials
- Exclusive Flax® technology

Type	Subwoofer
Diameter	12" (30cm)
Cone	Sandwich Flax®
Magnet	Ferrite
Surround	Rubber
Max. power	600W
Nom. power	300W RMS
Sensitivity (2.83V/1m)	89dB
Impedance	4 Ω

FLAX EVO P 30 FSE

Technical Sheet


12" shallow subwoofer



SPECIFICATIONS

Nominal power	300W RMS
Maximum power	600W
Sensitivity (2.83V/1m)	89dB
Cone	Flax
Nom. impedance	4Ω
Surround	Butyl
DC resistance	3.2 Ω
VC diameter	38mm 1 1/2"
Former	Glass fiber
Layers	4
Wire	Copper
Net weight	4.2kg 9.26lbs

FREQUENCY RESPONSE/IMPEDANCE

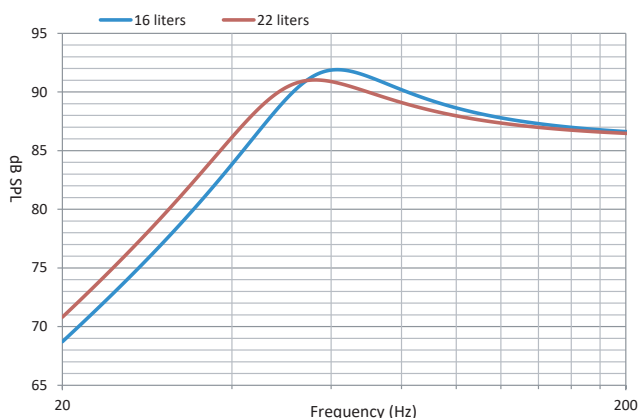

PARAMETERS

Rdc	3.2Ω
Fs	30Hz
Mms	220g
Cms	0.12mm/N
Vas	42 l
Qts	1.1
Qes	1.3
Qms	7.2
Bxl	10.2N/A
Sd	510cm ²
SPL	86dB
Xmax	11mm 3/8"

MECHANICAL DRAWING (MM)

