

UTOPIA M

3.5WM

Product Data Sheet



Midrange 3.5"



Key points

- 'M'-profile 'W' cone
- 'TMD' suspension
- Frequency response: 200Hz - 10kHz
- Shallow depth



Type	Midrange
Midrange	(3.5") 87.5 mm
Voice coil diameter	(1.8") 45 mm
Motor	Neodymium
Cone	'M'-profile 'W'
Suspension	Tuned Mass Damper (TMD®)
Impedance	4Ω
Max. power	100W
Nom. power	50W
Sensitivity (2.83 V/1 m)	88dB
Frequency response	200Hz - 10kHz
Accessories	Mounting screws supplied Optional grilles

UTOPIA M

3.5WM

Technical Sheet

Midrange 3.5"




- 'M'-shape 'W' cone
- 'TMD' surround
- Shallow depth (31mm)

SPECIFICATIONS

Nominal power	50W
Maximum power	100W
Sensitivity (2.83V/1m)	88dB
Nom. impedance	4Ω
Cone	'M'-shape 'W'
Surround	Butyl
DC resistance	3.1Ω
VC diameter	45mm 1 9/16"
Former	Glass Fiber
Layers	1
Wire	CCAW
Magnet D x H	42x4mm 1 21/32" x 0 3/16"
Net weight	250g 0.55lbs

FREQUENCY RESPONSE/IMPEDANCE

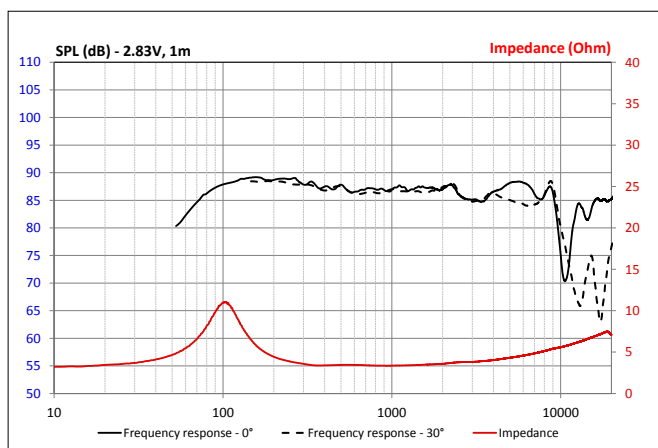

PARAMETERS

Rdc	3.1Ω
Fs	105Hz
Mms	4g
Cms	0.5mm/N
Vas	1l
Qts	0.58
Qes	1
Qms	2
Bxl	3N/A
Sd	38.5cm ²
SPL	85dB
Xmax	2.5mm

MECHANICAL DRAWING

Dimensions in mm

