


Part 1: Capturing HTTP Traffic

(Screenshot 1):

No.	Time	Source	Destination	Protocol	Length	Info
2532	291.255792000	2001:16a3:d12:d700::...	2a00:1450:4006:81e::...	HTTP	376	GET /r/esp1.cr1 HTTP/1.1
2535	291.331201000	2a00:1450:4006:81e::...	2001:16a3:d12:d700::...	HTTP	297	HTTP/1.1 304 Not Modified
2536	291.352342200	2001:16a3:d12:d700::...	2a00:1450:4006:81e::...	HTTP	285	GET /we1/AANN7G_Sv7M.cr1 HTTP/1.1
2537	291.428646200	2a00:1450:4006:81e::...	2001:16a3:d12:d700::...	HTTP	272	HTTP/1.1 304 Not Modified
2538	291.443836300	2001:16a3:d12:d700::...	2a00:1450:4006:81e::...	HTTP	274	GET /r/r4.cr1 HTTP/1.1
2541	291.519348800	2a00:1450:4006:81e::...	2001:16a3:d12:d700::...	HTTP	296	HTTP/1.1 304 Not Modified

Part 2: Analyzing TCP/IP Traffic


1594	28.130753400	192.168.100.46	23.203.61.21	TCP	66	54571 → 80 [SYN] Seq=0 Win=65535 Len=0 MSS=1460
1597	28.243336600	2a02:26f0:4000:4::b...	2001:16a3:d12:d700::...	TCP	86	80 → 54567 [SYN] Seq=0 Ack=1 Win=64800 Len=0
1598	28.243638600	2001:16a3:d12:d700::...	2a02:26f0:4000:4::b...	TCP	74	54567 → 80 [ACK] Seq=1 Ack=1 Win=65280 Len=0

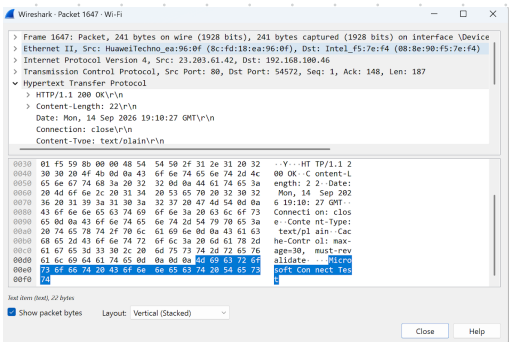

(Screenshot 3 - Termination):

173	1.252170500	2001:16a3:d12:d700::...	2a02:26f0:4000:4::b...	TCP	74	56052 → 80 [FIN, ACK] Seq=156 Ack=189 Win=65280
174	1.258845100	23.44.51.128	192.168.100.46	TCP	54	80 → 56054 [ACK] Seq=1 Ack=155 Win=64128 Len=0

Part 3: Capturing and Analyzing UDP Traffic

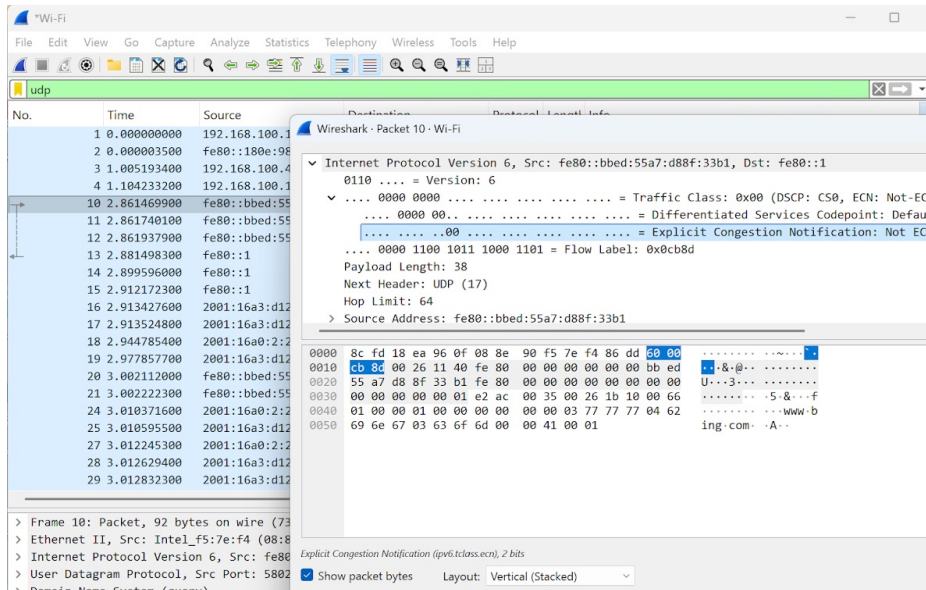

The UDP header is simple, lightweight, and fixed at 8 bytes with only four fields: Source Port, Destination Port, Length, and Checksum. It operates connectionlessly without handshakes, sequence numbers, or delivery guarantees, making it fast and efficient. In contrast, the TCP header is complex and larger (at least 20 bytes), using sequence/acknowledgment numbers and control flags (SYN, ACK, FIN) to ensure reliable, ordered data delivery through a 3-way handshake.