




RevNo	Revision note	Date	Signature	Checked

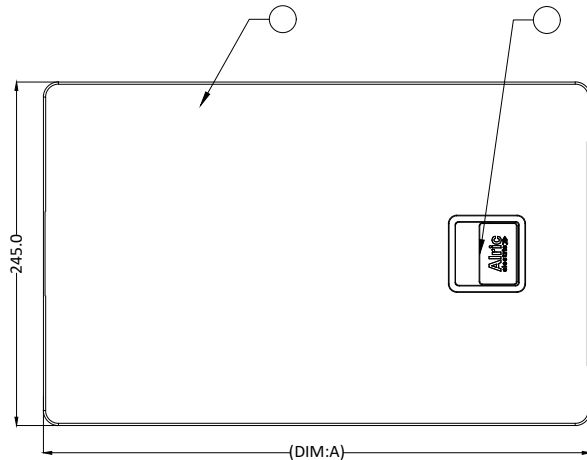


Front view

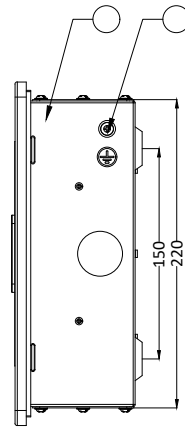


Side view

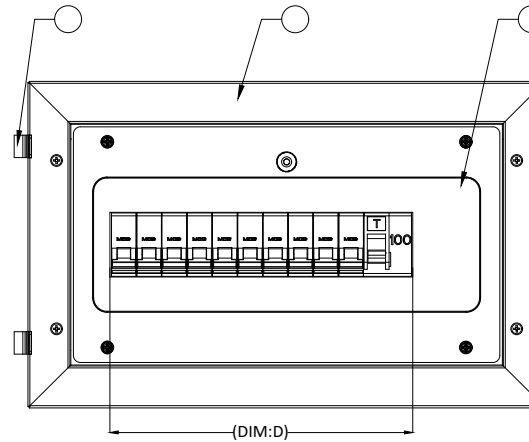

Front view-without Door

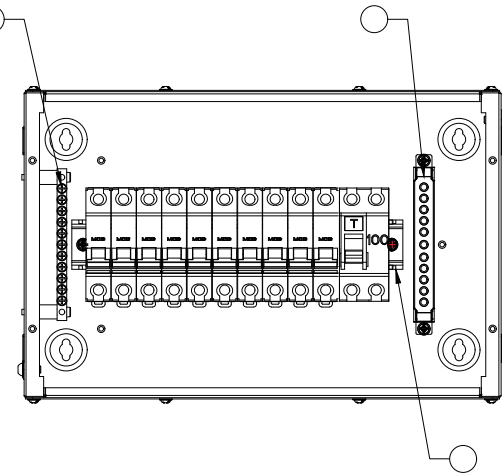

Internal view

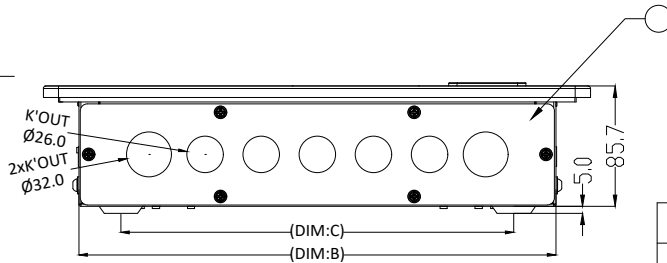

Bottom view

- BOM :
1. Door
 2. Doorknob
 3. U box
 4. Earthing screw
 5. Hinge
 6. Frame
 7. Shield
 8. Earth bar-as per way- 9x6 mm Brass
 9. Neutral bar-as per way-10x8 mm Brass (Shrouded)
 10. Din rail
 11. Removable Gland Plates

	DESCRIPTION	A	B	C	D
		246	196	136	72
		282	232	172	108
		318	268	208	144
					216
		462	412	352	288
		498	448	388	324
		534	484	424	360

Note:

1. Material: CRCA/IS513 CR2, Thickness: Box 0.9 mm, Gland Plate 0.9 mm, Frame 0.9 mm, Door 1.0 mm,
2. Unspecified tolerance: IS:2102 Medium,
3. Degree of protection : IP=43,
4. Finish: Powder coating RAL 9003 White fine texture Finish,
5. Fork type bus bar- as per way.
6. Powder Coating Thickness: 60-90 microns
7. Detachable Gland Plate at Top & Bottom,
8. D-Type gasket below door,
9. Door earthing not required,
10. Door reversible with frame.
11. Outer dimension tolerances within ± 2.0 mm
12. MCB's are shown only for graphical Representation.

UNSPECIFIED TOLERANCE, IS:2102 MEDIUM							
LINEAR						ANGULAR	
DVER	0.4000	3	6	30	120	0	10
UP TO	3	6	30	120	400	10	50
DEV.	± 0.1	± 0.1	± 0.2	± 0.3	± 0.5	$\pm 1^\circ$	$\pm 20'$

REV No.		MATERIAL			SURFACE TREATMENT		PRODUCT NAME	
DIMENSION	SCALE	DRAWING NO			ITEM DESCRIPTION		TITLE	
DESIGNED	DATE	DRAWN	CHECKED	APPROVED				