


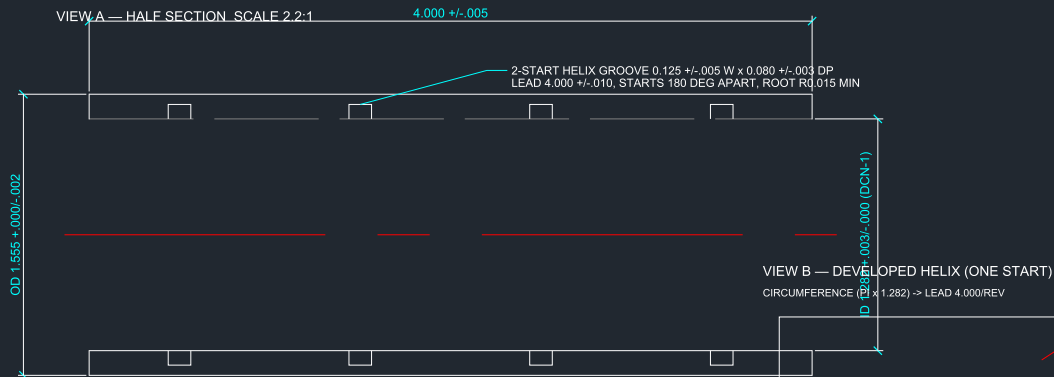

NOTES:

1. DCN-1: ID CHANGED 1.552 -> 1.282 SO 0.080 GROOVES HAVE WALL (WAS 0.0015 WALL).
2. MATES: SHEX-010 POCKET DIA 1.558 (PRESS/SLIP); SHEX-011 NECKED DRIVE ZONE.
3. MANUFACTURE: EDM OR 5-AXIS FOR HELIX GROOVES.
4. ANTI-ROTATION PIN DIA 0.062 THROUGH SLEEVE + INSERT, 1 PLACE, AT ASSY.
5. FUNCTIONAL TEST IN SHEX-010 POCKET WITH MANDREL + 1 SEGMENT.
6. RUN-IN MODULE PART — NOT FOR SET OD 5.750/8.650.

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
.XX +/-0.010 .XXX +/-0.005
ANGLES +/-0.5 DEG
BREAK SHARP EDGES 0.010 MAX

SHEX-BP-UHEX-54 HIGH-EXPANSION BRIDGE PLUG

IRIS HELIX GUIDE INSERT

DWG NO: DWG-002A-SHP REV A

PART NO: SHEX-002 QTY/PLUG: 1

MATL: INCONEL 718 (AMS 5662)

UNITS: INCH PROJECTION: THIRD ANGLE SIZE B

GENERATED FROM cad/release_solids.py PARAMETRIC MODEL