




# Beech

*Design and Manufacturing*

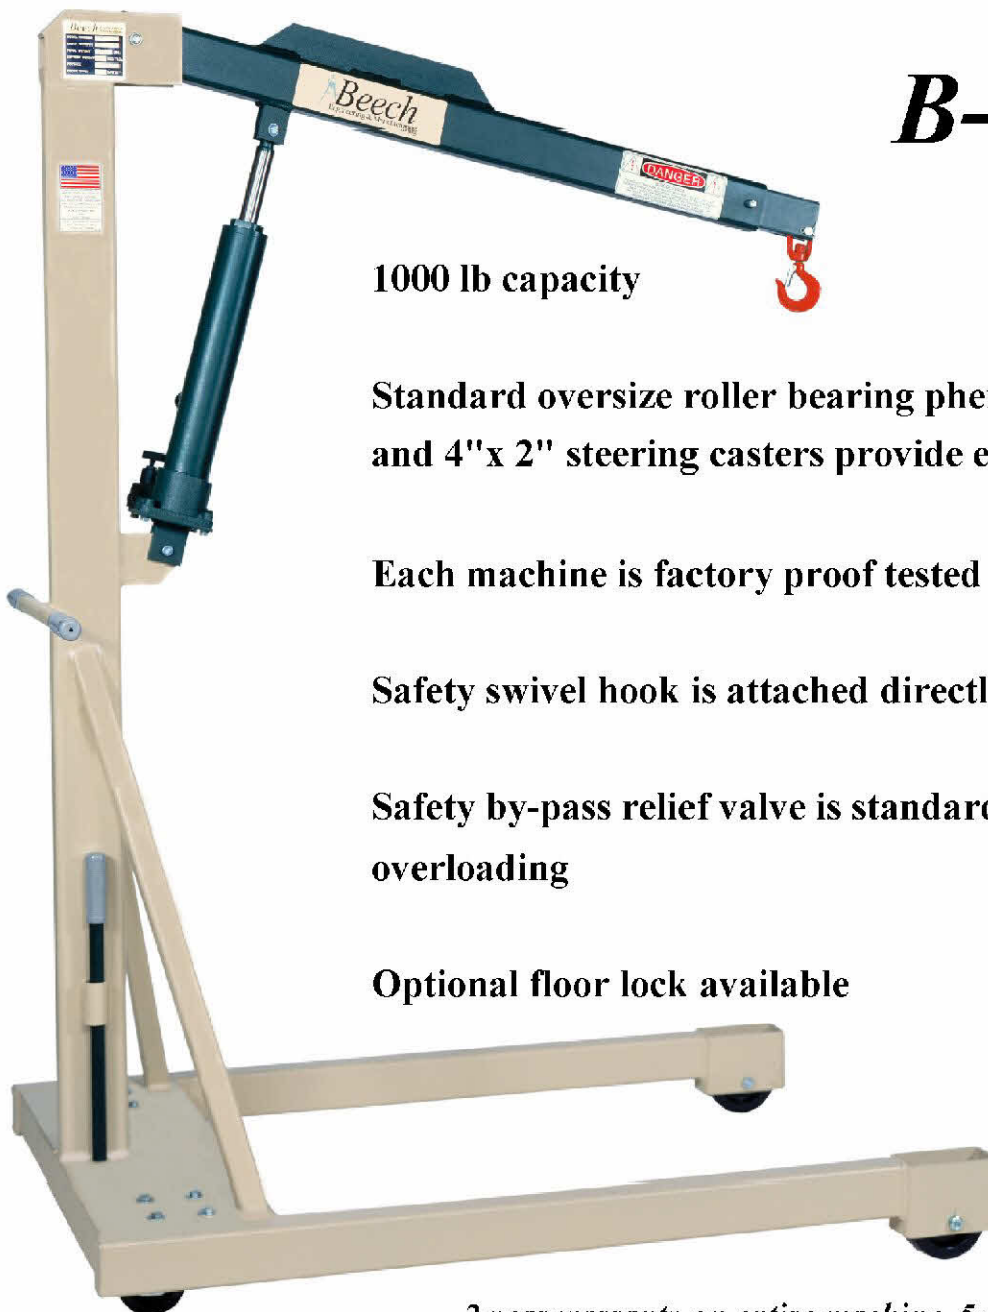

## ***B-1000***

**1000 lb capacity**

**Standard oversize roller bearing phenolic 5"x 2" load wheels and 4"x 2" steering casters provide ease of movement**

**Each machine is factory proof tested to 150% of load**

**Safety swivel hook is attached directly to boom**

**Safety by-pass relief valve is standard to prevent dangerous overloading**

**Optional floor lock available**



*2 year warranty on entire machine, 5 year on frame weldment*


**P.O. Box 947 • New Philadelphia, Ohio 44663 • Phone 1-800-726-9491 • Fax 330-343-3037**

**[www.beech-design.com](http://www.beech-design.com)**

A Division of



# Model B-1000 Hydraulic Floor Crane

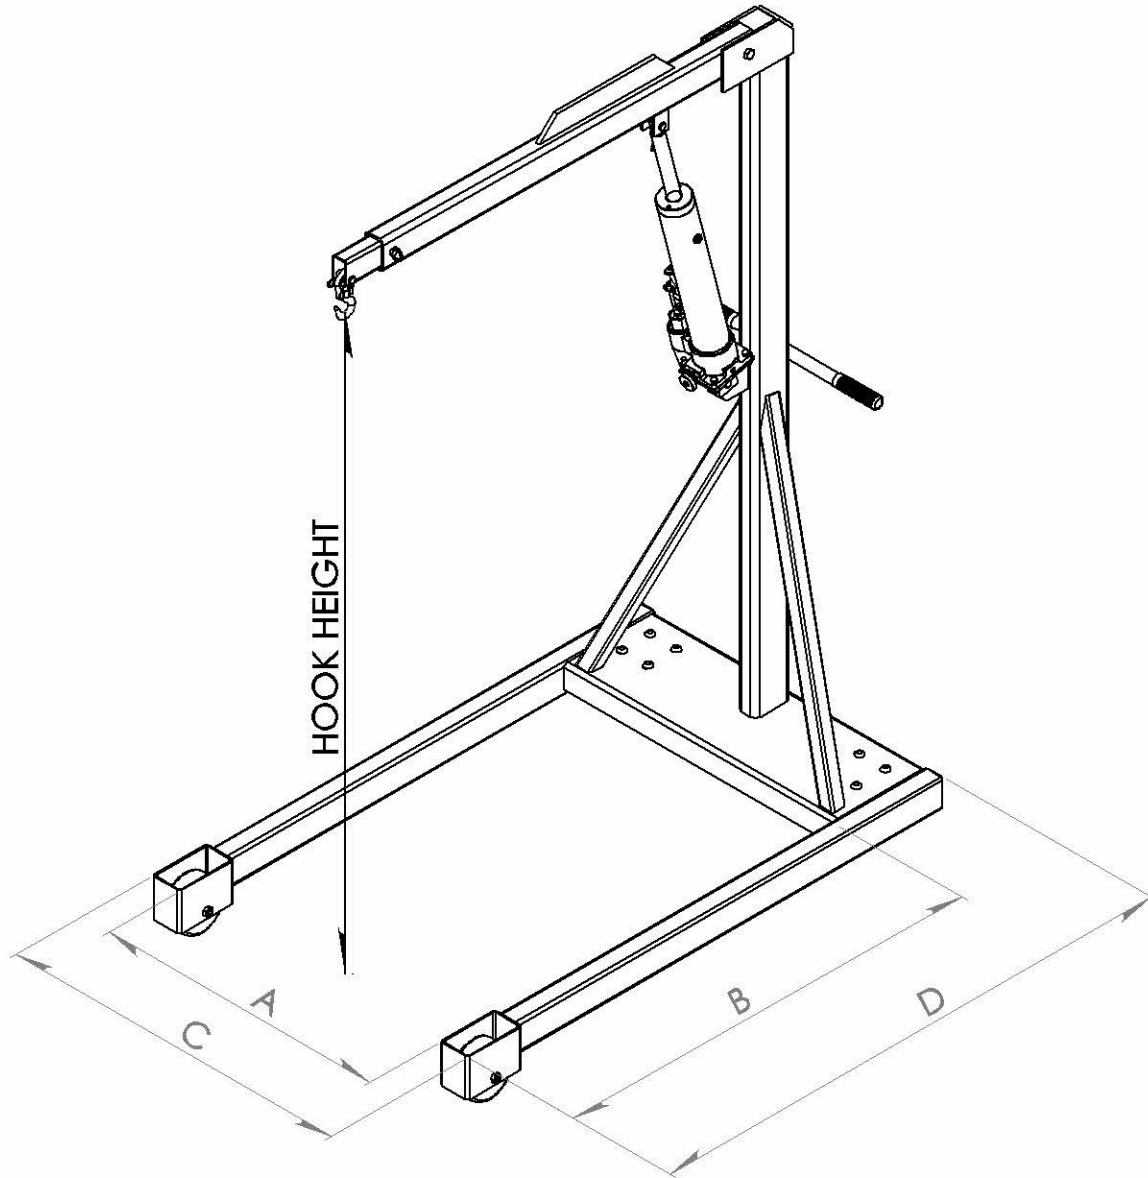

Model No.	Pump Type <sup>1</sup>	Machine Weight	Boom Position <sup>2</sup>	Hook Capacity	Hook Height <sup>3</sup>		Dimensions				
					Min	Max	A	B	C	D	OAH
B-1000	Single Speed Manual	200 lbs.	38 1/2"	1000 lbs.	30"	105"	28"	43"	35 7/8"	53 1/8"	71 7/8"
			44 1/2"	750 lbs.	25"	110"					
			50 1/2"	450 lbs.	20"	116"					
			56 1/2"	200 lbs.	15"	121"					

<sup>1</sup> Pump is equipped with internal load relief to protect both load and crane.

<sup>2</sup> Measured from the front of base channel to centerline of load hook.

<sup>3</sup> Add 7" to maximum hook height to assure overhead clearance.

**Beech Design & Manufacturing**  
**P. O. Box 947 \* New Philadelphia, Ohio 44663 \* Phone 800-726-9491 \* Fax 330-343-3073**  
**www.beech-design.com**