Front panel, dimension map

Every plotted point uses the built-in test draft outputs.

WAIST	SEAT	BAND	DEPTH
32″	40″	1.5″	12″
TOTAL LENGTH	**FLAT HEM**	**CURVED FRONT RISE**	**FABRIC WIDTH**
42″	8″	12.5″	30″

MEASUREMENT COORDINATES · INCH SCALE

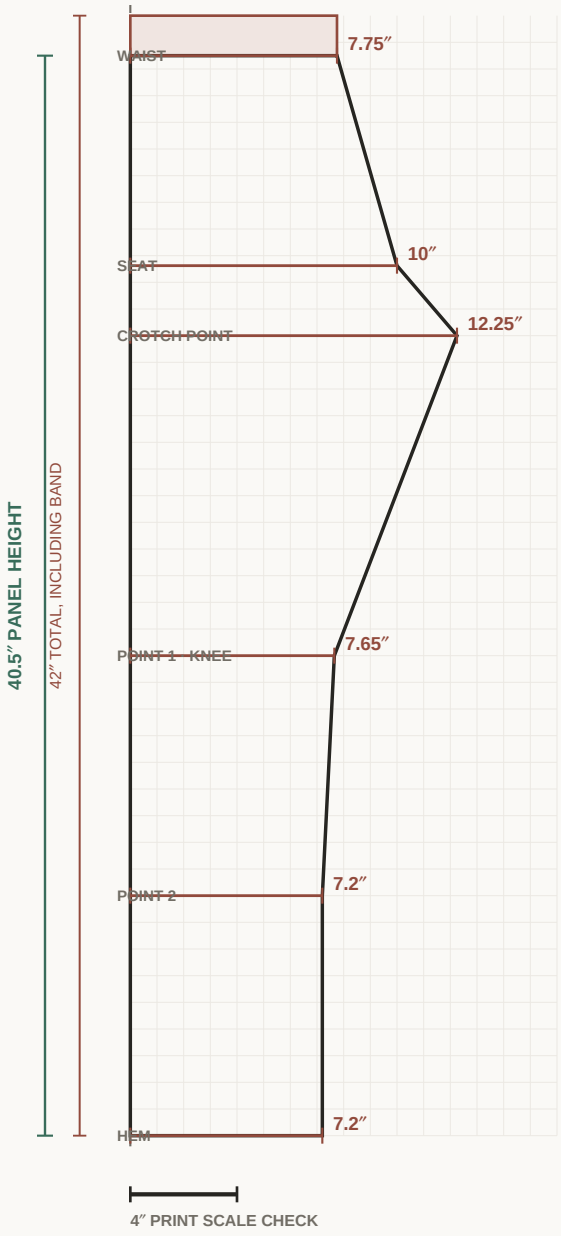

FRONT PANEL

Calculated stitching-line values

Waist-edge allocation	7.75″
Seat width	10″
Width to crotch point	12.25″
Crotch → knee / point 1	12″
Point 1 width	7.65″
Point 1 → point 2	9″
Point 2 width	7.2″
Point 2 → hem	9″
Hem width	7.2″
Panel outseam height	40.5″
Cutting envelope width	13.375″

LEVELS FROM WAIST ATTACHMENT

Seat level	7.875″
Crotch level	10.5″
Leg span	30″
Knee below crotch	12″
Point 1 → point 2	9″
Point 2 → hem	9″

FRONT SHARE

45% of each leg circumference.

KNEE SOURCE

8″ flat hem + ½″ = 8.5″ flat knee.

CUT WIDTH

12.25″ max span + ■″ inside + ½″ outseam.

FRONT-RISE REFERENCE

12.5″ curved seam target, not vertical depth.

CUTTING ALLOWANCES · OUTSIDE STITCHING LINES

Waist 1/2″ · Inseam 5/8″ · Front outseam 1/2″

Back outseam 1/2″ · Front rise straight 1/4″

Front rise curve 1/2″ · Hem turn-up 1″

Grid is 1 inch. Widths use one shared datum at 10 pt per inch.
Connectors are construction references, not sewn curves.

Back panel, dimension map

Every plotted point uses the built-in test draft outputs.

WAIST	SEAT	BAND	DEPTH
32″	40″	1.5″	12″
TOTAL LENGTH	**FLAT HEM**	**CURVED FRONT RISE**	**FABRIC WIDTH**
42″	8″	12.5″	30″

MEASUREMENT COORDINATES · INCH SCALE

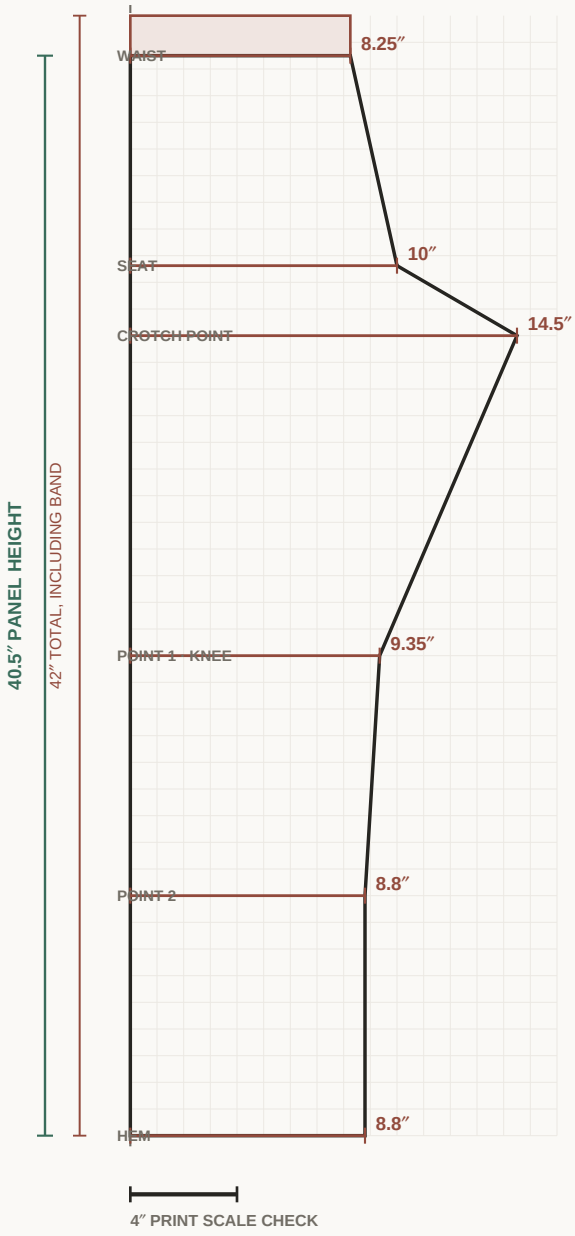

BACK PANEL

Calculated stitching-line values

Waist-edge allocation	8.25″
Seat width	10″
Width to crotch point	14.5″
Seat offset reference	1.125″
Crotch → knee / point 1	12″
Point 1 width	9.35″
Point 1 → point 2	9″
Point 2 width	8.8″
Point 2 → hem	9″
Hem width	8.8″
Panel outseam height	40.5″
Cutting envelope width	15.625″

LEVELS FROM WAIST ATTACHMENT

Seat level	7.875″
Crotch level	10.5″
Leg span	30″
Knee below crotch	12″
Point 1 → point 2	9″
Point 2 → hem	9″

BACK SHARE

55% of each leg circumference.

FORK FORMULA

Q = 40 ÷ 8 – 0.5 = 4.5″; back offset = Q ÷ 4.

CUT WIDTH

14.5″ max span + ■″ inseam + ½″ outseam.

FRONT-RISE REFERENCE

12.5″ curved seam target, not vertical depth.

CUTTING ALLOWANCES · OUTSIDE STITCHING LINES

Waist 1/2″ · Inseam 5/8″ · Front outseam 1/2″

Back outseam 1/2″ · Front rise straight 1/4″

Front rise curve 1/2″ · Hem turn-up 1″

Grid is 1 inch. Widths use one shared datum at 10 pt per inch.
Connectors are construction references, not sewn curves.