SCHOTT RG665, 50mm Sq., 3mm Thick, Colored Glass Longpass Filter

#14-522

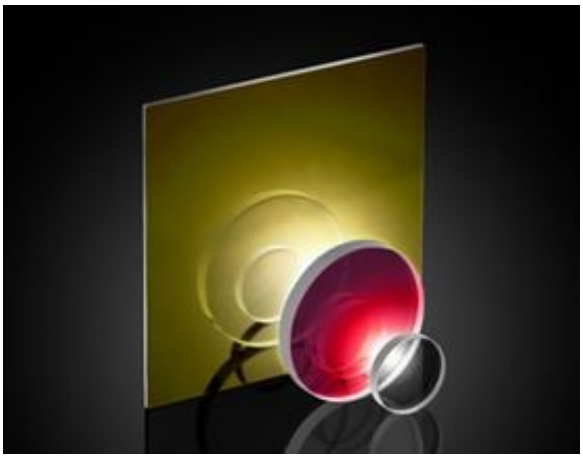

SCHOTT Colored Glass Longpass Filters are available in 27 standard SCHOTT colored glass types, providing cut-on wavelengths in the ultra-violet (UV), visible, or near-infrared (NIR) spectra. The color glass substrates feature high spectral transmittance within their wavelength ranges. SCHOTT Colored Glass Longpass Filters are designed with standard circular and square sizes for easy integration into optical systems and have a 1, 2, or 3mm thickness. Custom sizes from 5 to 160mm are available upon request.

Note: Due to supply chain issues, our kits may be delivered with an alternative packaging solution in place of a wooden box. For any questions, please contact kits@edmundoptics.com.

Phone: 1-800-363-1992 or 1-856-573-6250, Fax: 1-856-573-6295
101 EAST GLOUCESTER PIKE | P.O BOX 9000
BARRINGTON, NJ 08007-1380 USA

General

Type:	Longpass Filter

Physical & Mechanical Properties

Dimensions (mm):	50.0 x 50.0
Length (mm):	50.00
Thickness (mm):	3.00 ±0.2
Width (mm):	50.00
Dimensional Tolerance (mm):	±0.2
Bevel:	Protective as needed

Optical Properties

Cut-On Wavelength (nm):	665.00 ±6
Glass/Filter Number:	SCHOTT RG665
Coating:	Uncoated
Color:	Red
Passband Limit 1 λ_{p1} (nm):	750
Index of Refraction (n_d):	1.54
Spectral Transmittance t_{ip} (%):	96
Stopband Limit λ_s(nm):	580
Surface Quality:	60-40
Wavelength:	VIS
Reflection Factor P_d:	0.91

Material Properties

Density (g/cm^3):	2.77
Transformation Temperature (°C):	527

Phone: 1-800-363-1992 or 1-856-573-6250, Fax: 1-856-573-6295
101 EAST GLOUCESTER PIKE | P.O BOX 9000
BARRINGTON, NJ 08007-1380 USA

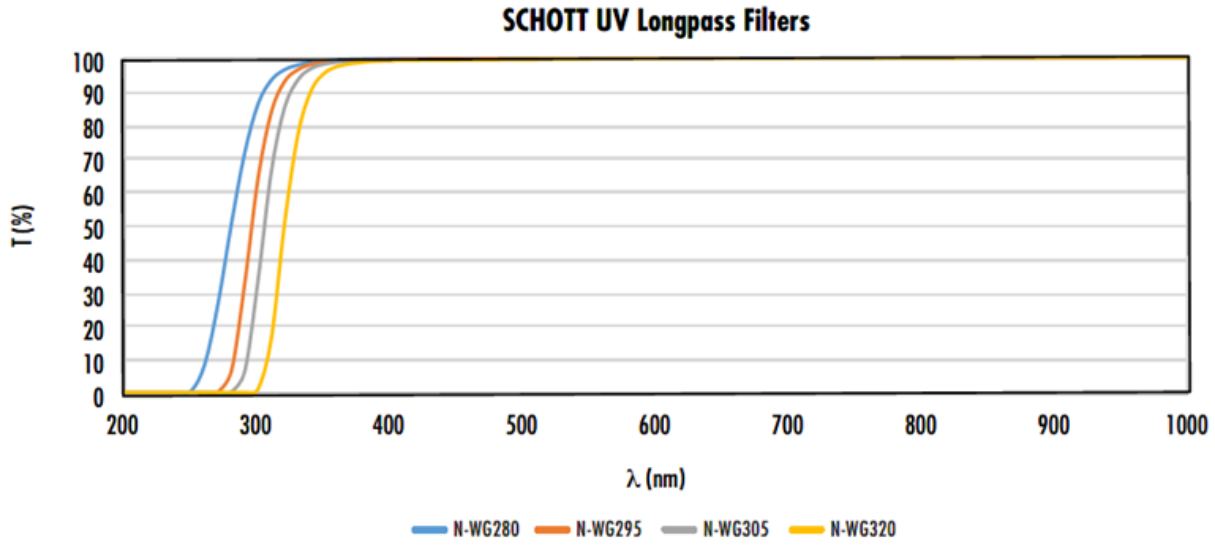

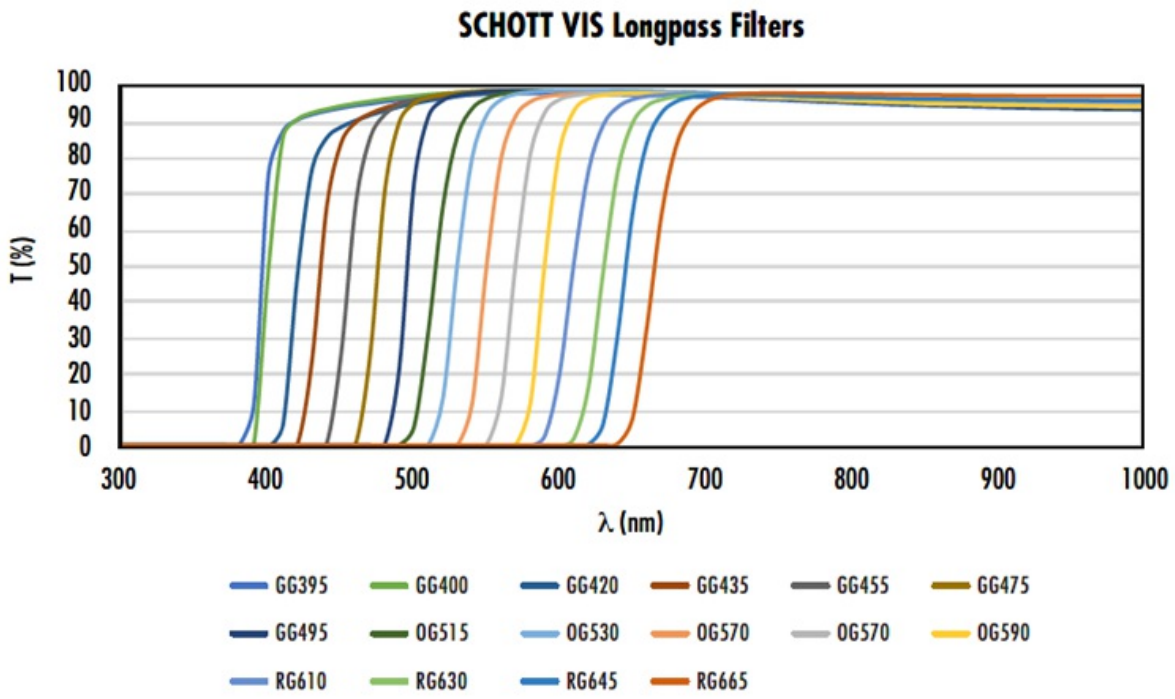

Phone: 1-800-363-1992 or 1-856-573-6250, Fax: 1-856-573-6295
101 EAST GLOUCESTER PIKE | P.O BOX 9000
BARRINGTON, NJ 08007-1380 USA

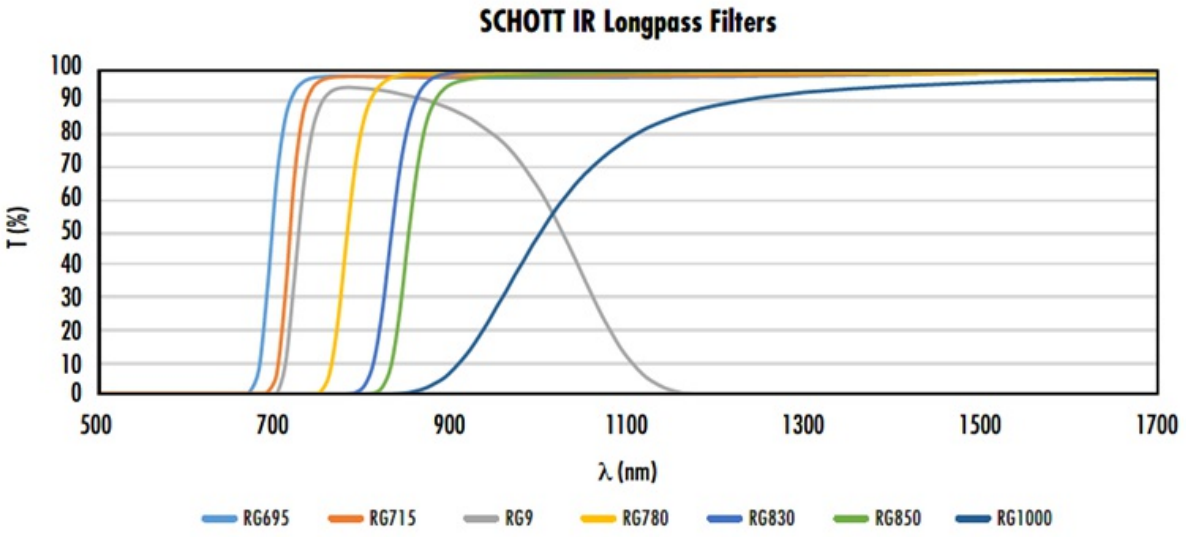

March 16, 2026

To Whom It May Concern,

This document certifies that the product stated below has been reviewed as requested by Edmund Optics:

Stock No.	*Description*
14-522	SCHOTT RG665, 50mm Sq., 3mm Thick, Colored Glass Longpass Filter

This item is EU RoHS (2015/863/EU) exempt based on **Exemption 13b**: Cadmium and lead in filter glasses used for reflectance standards.

This certification means that:

- EO's suppliers have confirmed the material composition of this product.
- EO has implemented rigorous procedures to document this compliance.
- The information provided may, or may not, be based upon actual test data, or on information from our Vendors, Raw Material Suppliers or Subcontractors.

Jay Budd, Director of Corporate Compliance
March 16, 2026

Edmund Optics Inc. - 101 E Gloucester Pike, Barrington, NJ 08007 | 1-800-363-1992 | Compliance@edmundoptics.com

Phone: 1-800-363-1992 or 1-856-573-6250, Fax: 1-856-573-6295
101 EAST GLOUCESTER PIKE | P.O BOX 9000
BARRINGTON, NJ 08007-1380 USA

March 16, 2026

Stock No.	Description
14-522	SCHOTT RG665, 50mm Sq., 3mm Thick, Colored Glass Longpass Filter

Edmund Optics certifies that all articles included in this shipment are in compliance with the terms and conditions of this order. The company also certifies that the articles included in this shipment are in accordance to all agreed upon specifications and quality assurance provisions. Please call 1-800-363-1992 should any questions arise from this shipment.

Jeff Harvey- EVP of Operations

Phone: 1-800-363-1992 or 1-856-573-6250, Fax: 1-856-573-6295
101 EAST GLOUCESTER PIKE | P.O BOX 9000
BARRINGTON, NJ 08007-1380 USA

NOTES:

1. SUBSTRATE: SCHOTT RG665
2. SURFACE S2 TO BE PARALLEL TO SURFACE S1 TO WITHIN 1 ARCMIN

FOR INFORMATION ONLY:
DO NOT MANUFACTURE PARTS TO THIS DRAWING

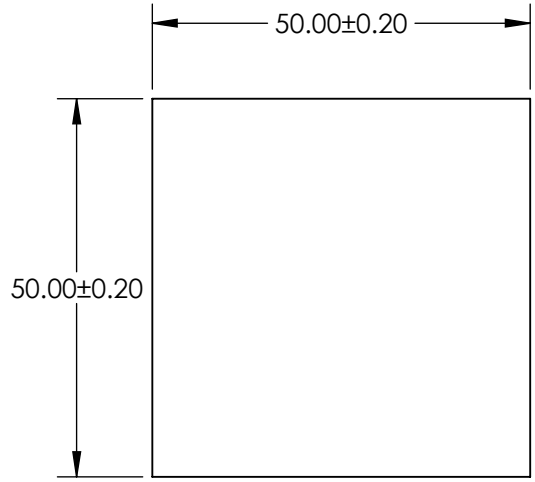

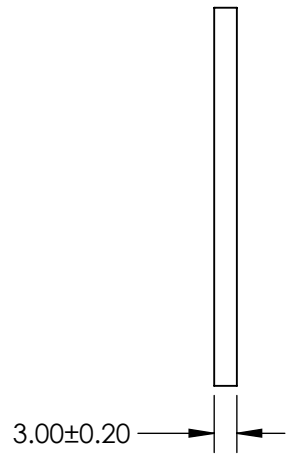



LONGPASS FILTER

	VALUE
SHAPE	PLANO
CUT-ON WAVELENGTH (nm)	665 ±6
PASSBAND LIMIT 1 (nm)	750
STOPBAND LIMIT (nm)	580
SURFACE QUALITY	60-40
CLEAR APERTURE	48.50 x 48.50
BEVEL MAX FACE	PROTECTIVE AS NEEDED

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

Edmund Optics®

THIRD ANGLE PROJECTION		TITLE	SCHOTT RG665 50 x 50mm COLORED LONGPASS FILTER, 3mm THK	
ALL DIMS IN	mm	DWG NO	14522	SHEET 1 OF 1