Atlas Copco Service

Mobile Workshop

For easy and convenient service of drill rigs





Atlas Copco

Fully equipped 20 ft Mobile Workshop

This upgraded version of the Mobile Workshop contains all the equipment needed for the work to maintain and increase the availability of your drilling equipment. And with more well thought-out tool options to optimize the workshop.

This is a 20 ft ISO standard, steel container, internally insulated and fitted with a non-slip aluminium floor plating. One end of the container has two main doors that open completely. One side of the container has a window with steel shutter.

The container is equipped with electric heating and has a complete electric and compressed air line system for immediate connection to electrical and pneumatic power sources.

The container can also be delivered as a Basic Workshop without any tools or machinery, for those who wish to equip the container themself.

Base sockets have been provided for transportation with forklift truck. External dimensions 6.0 x 2.5 x 2.6 m. Weight incl. standard equipment, approx. 3000 kg.

The Mobile Workshop is delivered for 230V/50Hz and 380V/50Hz. Other voltages can be supplied on request.

Basic Mobile Workshop

Including the following equipment:

- Workbench, 2.5 m long with vice and lockable pedestal
- Shelves
- Tool-board with tool hooks
- Hose roll-up for air pressure, 14 m
- Electric cable roll-up for 230 V, 17 m
- Writing desk with lockable pedestal
- Fire exstinguisher, powder
- First aid panel
- Cleaning material, brush and dustbin
- Ventilation system
- Heating fan
- Padlock for the doors

Part No. 3219 0003 39

Fully equipped Mobile Workshop

Consists of the Basic Mobile Workshop and with the following complementary equipment:

- Standard tool kit, all hand tools needed for carrying out service and repair work.
- Hydraulic press, 30 ton, with mandrel set.
- Extensible hoist beam with manual tackle, 500 kg.
- Small-part cleaning booth with exhaust, simple to clean. 25 l of cleaning agent included.

Part No. 3219 0003 38

The Mobile Workshop can also be supplied with
- Air conditioner 3219 0003 26
- Air dryer 9106 1015 59

which have to be ordered separately.



Mobile Workshop with front doors and side window with steel shutter.

Standard tool kit



The standard tool kit is a complete set of quality tools including the most common tools needed for general work in the workshop. For special tools needed for service work on the rock drills see the Rock drill tool set list.

Part No. 9106 1015 16



The standard tools are delivered separately and not mounted on the tool-board.

Torque wrenches
½" grip, 10 – 100 Nm
Also included in 9106 1015 16
9106 1015 40

Torque wrenches
½" grip, 75 – 400 Nm
Also included in 9106 1015 16
9106 1015 41

Complementary equipment



Hydraulic press, 30 ton, with mandrel set.
9106 1015 06



Small-part cleaning booth with exhaust. Easy to change cleaning agent. 220 V. 25 liter of cleaning agent included.
9106 1015 08



Pneumatically extensible beam with manual hoisting tackle.
9106 1015 07

Rock drill tool sets

	Basic tool kit	Hydr. motor tool kit	Dismounting tool Driver	Model group tools			Supplement tool 1							Supplement tool 2		Supplement tool 3		Tools for extractor		Piston grinding kit
Rock drills	3115 3015 90	3115 3015 91	3115 2724 80	3115 3015 92	3115 3015 95	3115 3016 94	3115 3015 93	3115 3015 94	3115 3015 96	3115 3015 97	3115 3016 95	3115 3016 96	3115 0967 00	3115 3015 98	3115 3015 99	3115 3016 90	3115 3016 91	3115 3016 92	3115 3016 93	3115 2868 90
COP 1019 - 1025	■			■			■													
COP 1028	■			■				■												
COP 1032	■				■				■											
COP 1238	■	■	■		■					■			■							
COP 1338MEX	■	■	■		■					■			■					■		
COP 1432	■		■		■					■					■					
COP 1838ME/HF	■	■	■		■					■										
COP 1838MEX	■	■	■		■					■								■		
COP 1838CR	■	■			■					■				■		■				
COP 1838HE	■	■	■		■					■				■						
COP 1838HEX	■	■	■		■					■				■				■		
COP 1840HE	■	■	■		■					■				■						
COP 1840HEX	■	■	■		■					■				■				■		
COP 1850	■	■	■		■					■				■						■
COP 1850EX	■	■	■		■					■				■				■		■
COP 1850CR	■	■			■					■				■		■				■
COP 2550EX	■	■	■		■					■				■			■	■		
COP 4050ME	■	■				■					■									
COP 4050MEX	■	■				■					■								■	
COP 4050ME/HE-CR	■	■				■						■								

The basic tool kit 3115 3015 90 (on the right-side board) contains the special tools generally needed for overhauling the rock drill, including a pivot mounted fixture. Depending on the rock drill model to be served complementary tools have to be chosen from the above table.

Nitrogen bottle

For charging the rock drill's accumulators with nitrogen a 20 liters gas bottle should be ordered separately.

9106 1015 12



Optional equipment

The Mobile Workshop can be completed with a number of special tools and instruments.

- Special rock drill COP tools, chosen from the table on opposite page
- Diesel driven combined welding unit/electric power pack with cables and welding electrodes
- Flame gas welding unit complete with regulators and nozzels
- Compressor, two alternatives; one smaller 1-phase and one larger 3-phase
- High-pressure cleaner, two alternative; one hot-water electric 3-phase, one simpler electric 1-phase
- Electric rotary hammer drill
- Electric angle grinder with grinding and cut wheels
- Worklight, practical robust quality lamp
- Digital tachometer - optical and mechanical, suitable when adjusting the rock drill revolution speed
- IR Thermometer, suitable for checking the temperature on coupling and gearbox.
- Multimeter for all electrical measuring
- Current measuring tongs
- Helicoil thread set, for mounting of loose threads
- Torque wrenches, incl. in standard tool kit, 10 - 100 Nm and 75 - 400 Nm
- Portable test unit for hydraulic
- Hydraulic flow meter
- Digital manometer
- Digital spirit level
- Canbus service tool box, advanced instruments for trouble-shooting
- Operator's tool kit, simpler tools for operators



Fully equipped Mobile Workshop completed with a number of optional equipment



Welding/electric power pack
Diesel driven, combined unit
Generator set MPM 5/180 I-D/AE-Y
Welding 170 A – 27 V
Electric power pack 5 kVA 400V
9106 1015 30



High-pressure cleaner
Alto Master 40 H Hot-water, diesel burner (380V/50Hz) up to 140 degrees, max 195 bar
9106 1015 33



High-pressure cleaner
Alto Trion 850 (230V/50Hz)
9106 1015 32



Flame gas welding unit
Complete, AGA 5 liters bottles
3219 0003 28



Electric rotary/hammer drill
Atlas Copco PDE2E18R/S (230V/50Hz)
Robust rotary/hammer drill
3219 0003 30



Helicoil thread set
Complete set 6 - 16 mm
9106 1015 39



Compressor
Race 30C. (230V/50Hz)
Max 10 bar, 4.4 l/s, 1-phase
9106 1015 31



Compressor
Atlas Copco LE22-10
Max 10 bar, 4.4 l/s, 3-phase (380V/50Hz)
8115 4301 86



Electric angle grinder
Atlas Copco AG 1200-125S (230V/50Hz)
Robust angle grinder
3219 0003 19



Digital manometer
Measuring range 0 - 1000 bar
3128 3101 23



IR Thermometer
Measuring range -20° – +420°
9106 1015 42



Multimeter
Instrument with large measuring range
9106 1015 36



Current measuring tongs
Measuring range 0 – 200 A
9106 1015 37

Working light
Goliath 38
Robust quality lamp (230V/50Hz)
9106 1015 34



Digital tachometer
Mechanical/optical
0.5 - 100.000 rpm
9106 1015 35



Digital spirit level
Aid for making calibrations
3128 3098 76



Operator's tool kit
Simpler tools for operators
For daily maintenance and small repair jobs
3128 3097 60



Canbus service tool box
Advanced instruments for trouble-shooting of the Canbus system
9106 1120 95



Writing desk
with lockable pedestal
(included in basic workshop)



Hydraulic testing unit
for connection to 230V/50Hz
8095 0103 13



Flow meter HC 125
for hydraulic testing unit
3219 0003 27

Grinding equipment



Grind Matic Manual B
Is an air-powered, hand-held portable grinding machine for spherical and ballistic button bits. Using Grind Matic diamond grinding wheels. Mounted in a box fitted with wheels and handles, makes it easy to set up. A separate water tank provides efficient cooling. To be completed with grinding wheels and bit holders.

Grinding capacity

Max. diameter of bit skirt	90 mm
Threaded bits, max. diameter	127 mm
Retrac, max. diameter	127* mm
Tube drilling, max. diameter	152* mm

* *Large clamping device necessary*


Technical data

Air pressure, max.	7 bar (100 psi)
Air consumption	900 l/min
Speed of bit rotation	0 - 45 r/min
Idling speed of hand-held grinder	30,000 r/min
Coolant container	10 l
Weight of complete machine	55 kg
Transport dimensions	1200 x 800 x 850 mm
Gross weight	90 kg

Part No. 9424

For more information on grinding machines and grinding wheels see Atlas Copco Secoroc catalogue 9851 2156 01

Dimension

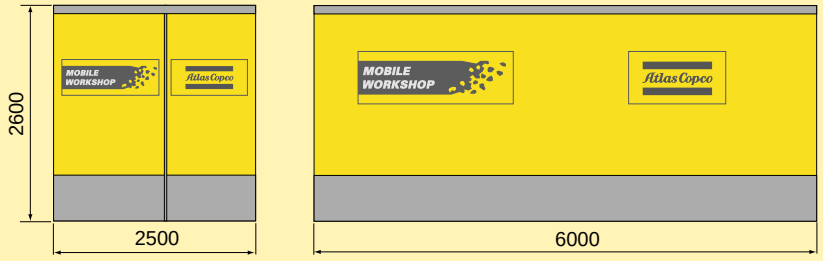

Weight: approx. 3000 kg

(mm)



Connections for electricity and air supply are located in a lockable box on the left-hand side of the container.

The manufacturer reserves the right to make modifications without prior notice. 2001.10

9851 2184 01

Atlas Copco