

IMU BOARD

DIGITAL SHARK TECHNOLOGY		
Title: Cover Page		
Size: A	Document Number: 1.0	Rev: 1.1
Date: Thursday, November 13, 2025	Sheet 0 of 4	

RIBBON CONNECTOR

Check the Orientation of connector Mounting.

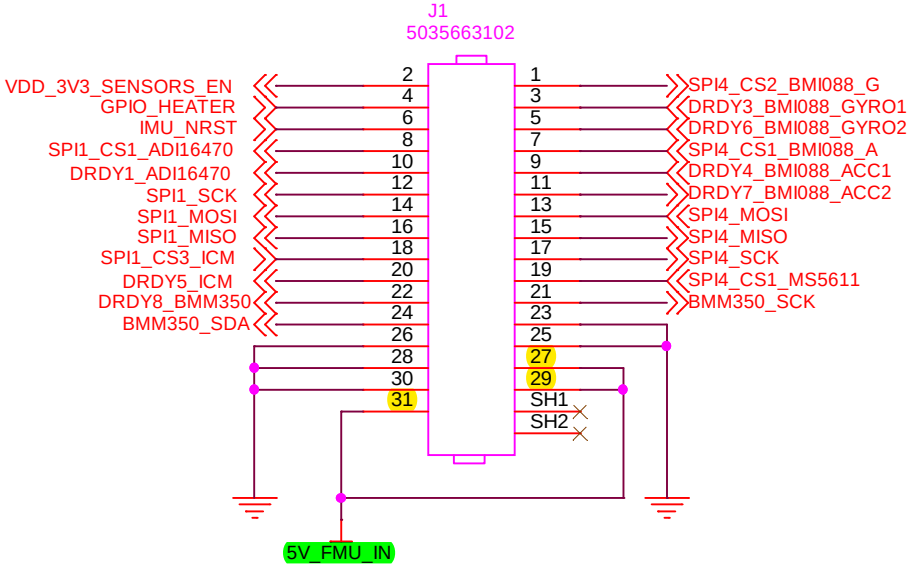

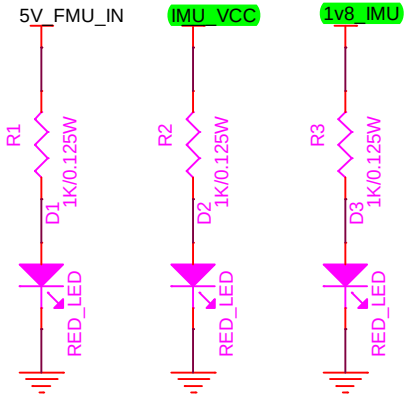

Mates with FFC Jumper : 150320231
same side, 51mm


DIGITAL SHARK TECHNOLOGY		
Title: Connector		
Size: A	Document Number: 1.0	Rev: 1.1
Date: Thursday, November 13, 2025	Sheet 1 of 4	

3.3V LDO IMU

500mA Limit, IMU

Remove R6- during Board bring-up

If "Enable" pin is Low;
Output will not be generated by the IC

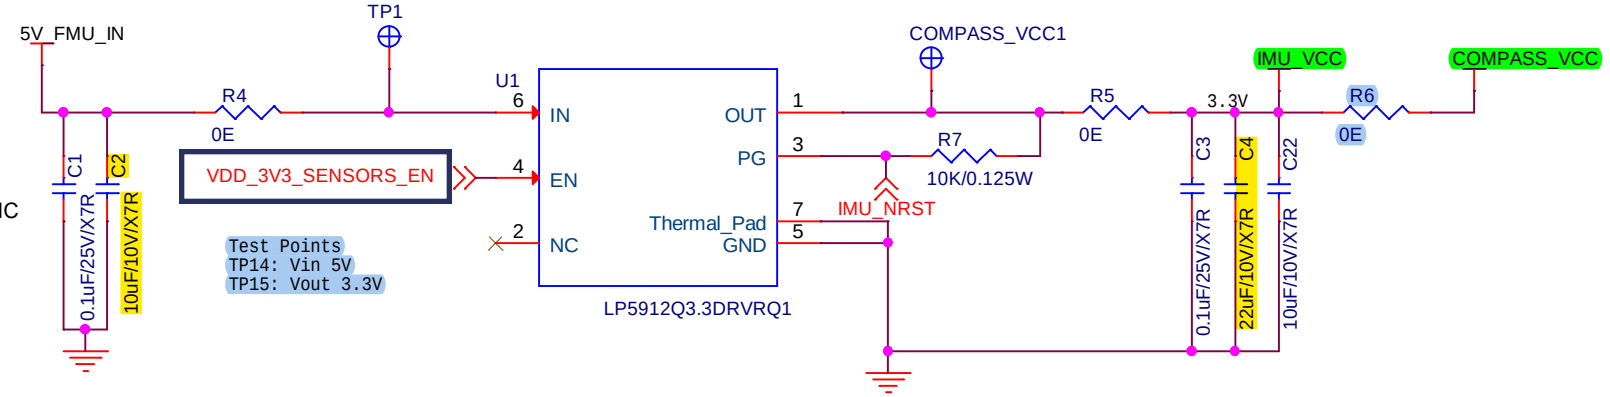


1.8V LDO IMU

0E = Resistors to be removed - after the capacitors

Net name is wrong.


"5V_IMU_IN" to be changed to

"5V_FMU_IN"

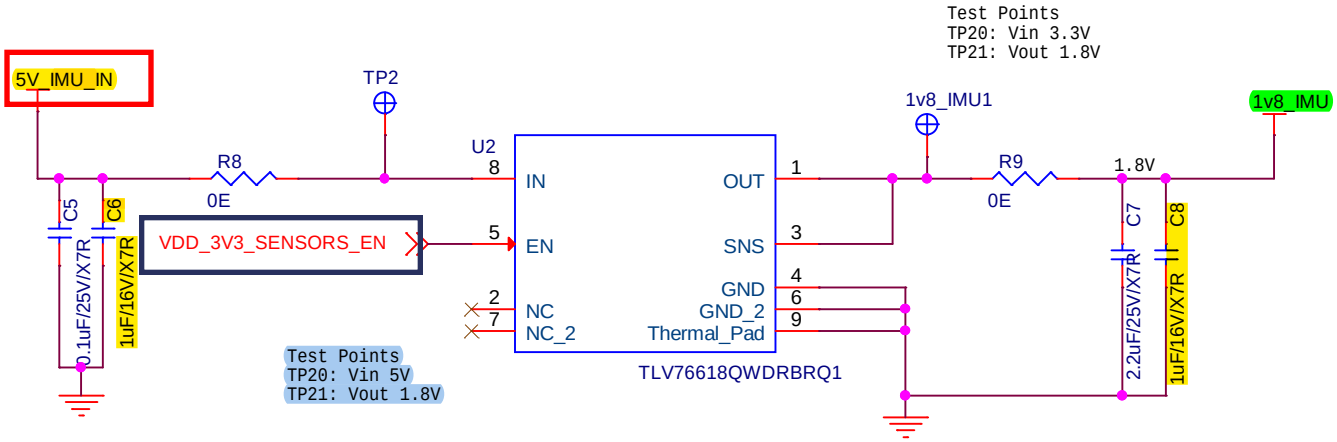


DIGITAL SHARK TECHNOLOGY		
Title: Power Regulator		
Size: A	Document Number: 1.0	Rev: 1.1
Date: Thursday, November 13, 2025	Sheet 2 of 4	


ADIS16470- IMU

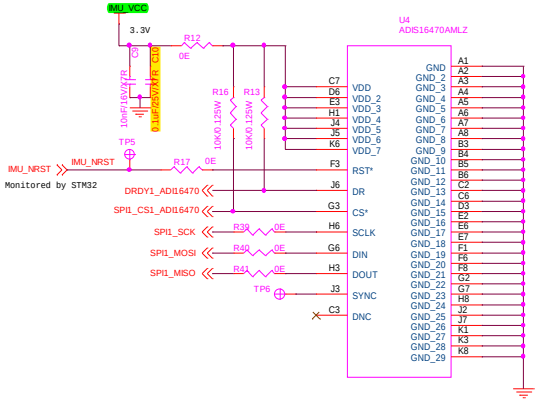

ICM42688-P-IMU

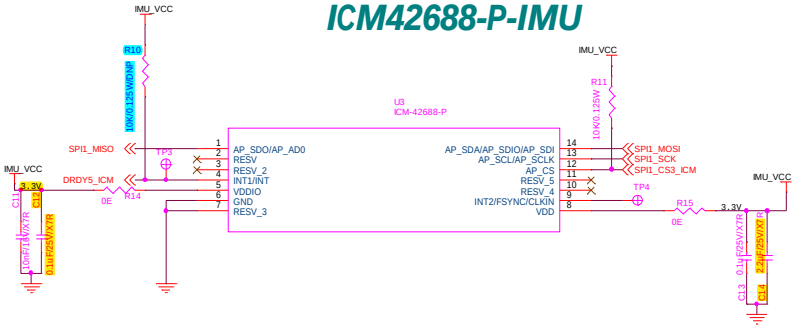


BMI088-IMU

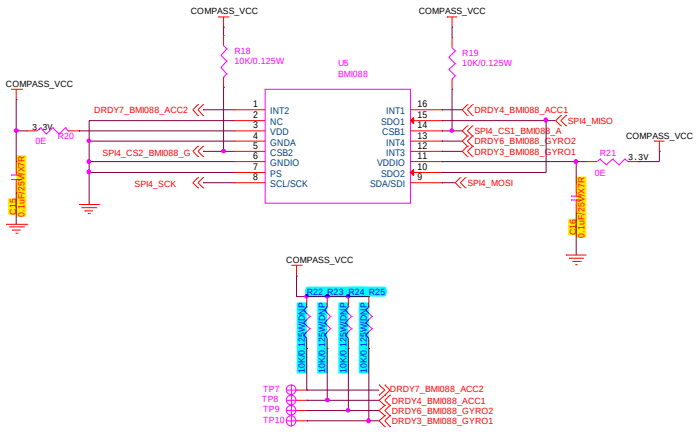

Protocol Notes
BMM350 I2C : I2C4
ADIS16470 SPI: SPI1
ICM42688 SPI: SPI1
MS5611 SPI: SPI4
BMI088 SPI: SPI4


MS5611-BAROMETER

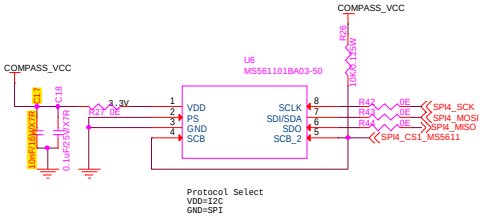

Remove R31- during Board bring-up

BMM350-MAGNETOMETER


R29, R30 to be removed
(Already Pull-up resistors added in FCU Board)

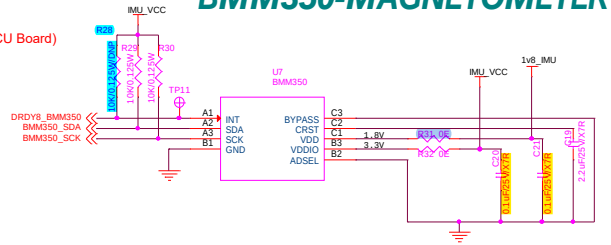

DIGITAL SHARK TECHNOLOGY		
Title: IMU		
Size: C	Document Number: 1.0	Rev: 1.1
Date: Thursday, November 13, 2025	Sheet 3 of 4	

HEATER

1 Watt Heater for offboard sensors
200mA Load

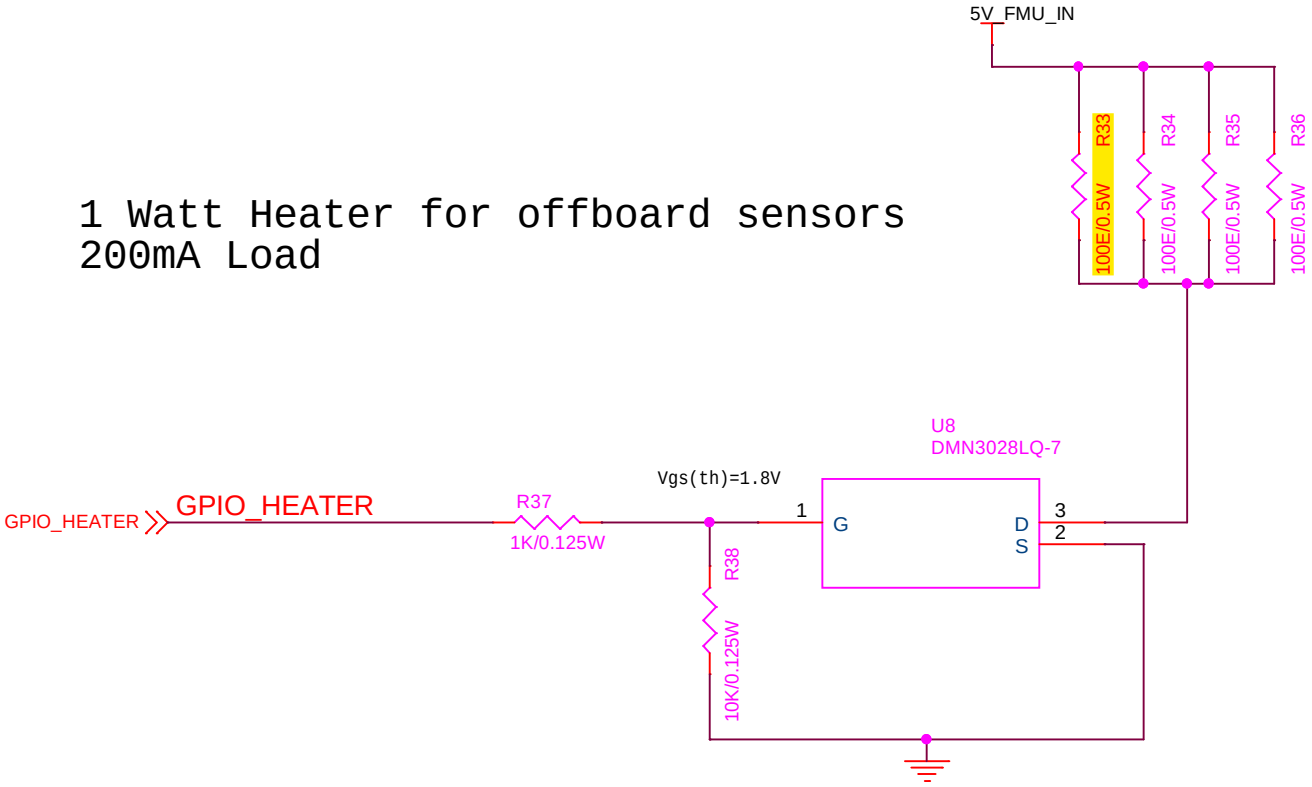

DIGITAL SHARK TECHNOLOGY		
Title: Heater		
Size: A	Document Number: 1.0	Rev: 1.1
Date: Thursday, November 13, 2025	Sheet 4 of 4	