

Unit 114 - Field Data Review

Mohawk Valley West Slope demonstration. Method **Tractor**, 116.3 ac, BAF 20 variable-radius cruise on a 300 ft grid, 56 plots, 593 trees tallied. Simulated data with planted recording errors; see docs/methods.md.

Table 1. Stand summary from the BAF 20 cruise, per acre

STAND DENSITY		STAND INFO	
Basal area	212 sq ft/ac (1 SE of mean, BA 2.1 %)	Type	Sierran mixed conifer
Trees per acre	93	CWHR size / density	4 / D (cover 85 %)
QMD	20.5 in	SDI	276 (48 % of max 573)
SAWTIMBER (>= 10 in)		BIOMASS (< 10 in)	
BA QMD	208 sq ft/ac 21.6 in	BA QMD	4 sq ft/ac 7.9 in
TPA	81	TPA	11
Volume	32.5 MBF/ac (6468 cu ft)	Volume	1.4 green tons/ac (64 cu ft)
TREATMENT TARGET		CRUISE DESIGN	
Leave	35 % of max SDI = ~154 sq ft/ac BA	Sampling error (volume)	7.7 % at 95 % (CV 29 %, t = 2.00, n = 56)
Species (BA)	PP 65, WF 61, IC 33, DF 30, SP 22	Stratum standard	40 % of volume - MEETS; plots for standard: 3
		Sampling error (basal area)	3 % at 95 % (CV 16 %); secondary, not the standard
		Plot count	56 vs 20-plot local practice, not a handbook standard: ok

Cubic volume = total-stem CVTS by species (PNW-FIA California equations, MacLean and Berger 1976, CARB 2011 compendium) net of defect; Scribner board feet at 5.02 bf/cu ft (Keegan et al. 2010, table 2, California 2000-2006); green tons at PP 45, WF 47, DF 38, SP 49, IC 45 lb/cu ft of wood (Miles and Smith 2009, NRS-38 table 1A). SDI in the summation form; maximum is the basal-area-weighted FVS Western Sierra species maximum (table 3.5.1, rev. 2025-09-23). The Keegan ratio is Scribner log scale per cubic foot of delivered sawlog fiber, so applied to total-stem CVTS it overstates sawlog volume; merchantable cubic volume would be the consistent pairing. Sampling error at 95 % confidence with Student's t on plot net cubic volume per acre, the quantity the handbook standards apply to (FSH 2409.12 ch. 40, 41.1(5)(a) and (b)); stratum standard 40 % of volume for tree-measurement sales; the basal-area error is secondary. Stand-summary BA counts every tallied tree (plot count x BAF); the stand and stock tables exclude records flagged by QA, such as an out-of-range DBH, so the two can differ by a few tenths. Sources and URLs: cruise_data.xlsx, Standards and assumptions.

Table 2. Stand table by 4-inch DBH class, per acre

DBH class, in	Trees	TPA	BA	cu ft	MBF
4-7.9	5	7.0	1.8	29	0.1
8-11.9	23	13.4	8.2	143	0.7
12-15.9	70	22.5	25.0	556	2.8
16-19.9	78	15.8	27.9	704	3.5
20-23.9	103	14.3	36.8	1024	5.1
24-27.9	70	7.0	25.0	765	3.8
28-31.9	79	5.7	28.2	967	4.9
32-35.9	59	3.4	21.1	768	3.9
36-39.9	30	1.3	10.7	409	2.1
40-43.9	25	0.9	8.9	359	1.8
44-47.9	21	0.7	7.5	324	1.6
48-51.9	9	0.2	3.2	141	0.7
52-55.9	5	0.1	1.8	79	0.4
56-59.9	7	0.1	2.5	109	0.5
60-63.9	9	0.2	3.2	155	0.8
All	593	92.8	211.8	6531	32.8

Table 3. Stock table by species, per acre

Species	Trees	TPA	BA	QMD	cu ft	MBF
PP	183	32.0	65.4	19.4	2158	10.8
WF	172	25.3	61.4	21.1	1945	9.8
IC	92	13.8	32.9	20.9	845	4.2
DF	84	12.6	30.0	20.9	904	4.5
SP	62	9.1	22.1	21.1	681	3.4
All	593	92.8	211.8	20.5	6531	32.8

Trees = trees tallied in the cruise; TPA, BA (sq ft/ac), cubic feet and Scribner MBF per acre by BAF expansion. Species: PP ponderosa pine, WF white fir, DF Douglas-fir, SP sugar pine, IC incense-cedar.

Unit 114: plots on the 300 ft grid (orange = QA flag)

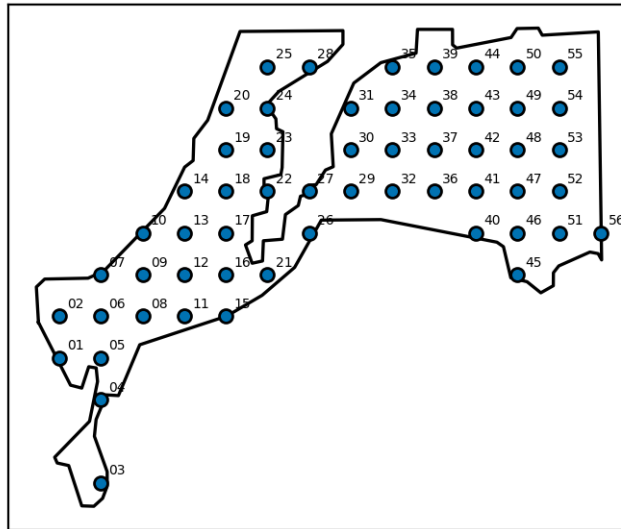


Figure 1. Plot locations with QA status.

QA findings: no issues found; unit accepted

Table 4. Plot list

Plot	Trees in	BA sq ft/ac	Slope %	Status
114-01	12	240	28	ok
114-02	9	180	17	ok
114-03	8	160	13	ok
114-04	12	240	21	ok
114-05	9	180	22	ok
114-06	11	220	11	ok
114-07	10	200	31	ok
114-08	14	280	21	ok
114-09	11	220	8	ok
114-10	12	240	32	ok
114-11	12	240	17	ok
114-12	12	240	21	ok
114-13	9	180	10	ok
114-14	11	220	19	ok
114-15	10	200	36	ok
114-16	11	220	11	ok
114-17	11	220	8	ok
114-18	10	200	20	ok
114-19	13	260	19	ok
114-20	12	240	18	ok
114-21	12	240	8	ok
114-22	9	180	9	ok
114-23	12	240	8	ok
114-24	8	160	10	ok
114-25	12	240	16	ok
114-26	9	180	28	ok
114-27	9	180	13	ok
114-28	11	220	21	ok
114-29	8	160	8	ok
114-30	12	240	14	ok
114-31	10	200	9	ok
114-32	10	200	10	ok
114-33	12	240	9	ok
114-34	11	220	13	ok
114-35	8	160	10	ok
114-36	6	120	10	ok
114-37	13	260	9	ok
114-38	12	240	43	ok
114-39	11	220	9	ok
114-40	11	220	23	ok
114-41	10	200	10	ok
114-42	11	220	9	ok
114-43	10	200	14	ok
114-44	10	200	11	ok
114-45	14	280	30	ok
114-46	10	200	18	ok
114-47	12	240	10	ok
114-48	8	160	9	ok
114-49	7	140	10	ok
114-50	10	200	9	ok
114-51	10	200	10	ok

Plot	Trees in	BA sq ft/ac	Slope %	Status
114-52	10	200	8	ok
114-53	12	240	6	ok
114-54	10	200	11	ok
114-55	11	220	8	ok
114-56	13	260	8	ok

SIMULATED DATA