

Unit 117 - Field Data Review

Mohawk Valley West Slope demonstration. Method **Tractor**, 82.2 ac, BAF 20 variable-radius cruise on a 300 ft grid, 44 plots, 490 trees tallied. Simulated data with planted recording errors; see docs/methods.md.

Table 1. Stand summary from the BAF 20 cruise, per acre

STAND DENSITY		STAND INFO	
Basal area	223 sq ft/ac (1 SE of mean, BA 2.0 %)	Type	Sierran mixed conifer
Trees per acre	89	CWHR size / density	4 / D (cover 88 %)
QMD	21.4 in	SDI	286 (49 % of max 580)
SAWTIMBER (>= 10 in)		BIOMASS (< 10 in)	
BA QMD	219 sq ft/ac 22.4 in	BA QMD	4 sq ft/ac 8.7 in
TPA	80	TPA	9
Volume	35.0 MBF/ac (6963 cu ft)	Volume	1.3 green tons/ac (59 cu ft)
TREATMENT TARGET		CRUISE DESIGN	
Leave	35 % of max SDI = ~158 sq ft/ac BA	Sampling error (volume)	7.7 % at 95 % (CV 25 %, t = 2.02, n = 44)
Species (BA)	WF 69, PP 66, IC 36, DF 33, SP 18	Stratum standard	40 % of volume - MEETS; plots for standard: 2
		Sampling error (basal area)	4.0 % at 95 % (CV 13 %); secondary, not the standard
		Plot count	44 vs 20-plot local practice, not a handbook standard: ok

Cubic volume = total-stem CVTS by species (PNW-FIA California equations, MacLean and Berger 1976, CARB 2011 compendium) net of defect; Scribner board feet at 5.02 bf/cu ft (Keegan et al. 2010, table 2, California 2000-2006); green tons at PP 45, WF 47, DF 38, SP 49, IC 45 lb/cu ft of wood (Miles and Smith 2009, NRS-38 table 1A). SDI in the summation form; maximum is the basal-area-weighted FVS Western Sierra species maximum (table 3.5.1, rev. 2025-09-23). The Keegan ratio is Scribner log scale per cubic foot of delivered sawlog fiber, so applied to total-stem CVTS it overstates sawlog volume; merchantable cubic volume would be the consistent pairing. Sampling error at 95 % confidence with Student's t on plot net cubic volume per acre, the quantity the handbook standards apply to (FSH 2409.12 ch. 40, 41.1(5)(a) and (b)); stratum standard 40 % of volume for tree-measurement sales; the basal-area error is secondary. Stand-summary BA counts every tallied tree (plot count x BAF); the stand and stock tables exclude records flagged by QA, such as an out-of-range DBH, so the two can differ by a few tenths. Sources and URLs: cruise_data.xlsx, Standards and assumptions.

Table 2. Stand table by 4-inch DBH class, per acre

DBH class, in	Trees	TPA	BA	cu ft	MBF
4-7.9	1	1.4	0.5	6	0.0
8-11.9	20	16.0	9.1	166	0.8
12-15.9	40	17.3	18.2	392	2.0
16-19.9	67	17.1	30.5	763	3.8
20-23.9	83	14.2	37.7	1077	5.4
24-27.9	71	8.9	32.3	1044	5.2
28-31.9	66	6.2	30.0	1036	5.2
32-35.9	50	3.6	22.7	811	4.1
36-39.9	31	1.8	14.1	544	2.7
40-43.9	21	1.0	9.5	397	2.0
44-47.9	19	0.7	8.6	371	1.9
48-51.9	9	0.3	4.1	168	0.8
52-55.9	7	0.2	3.2	137	0.7
56-59.9	3	0.1	1.4	68	0.3
60-63.9	2	0.0	0.9	42	0.2
All	490	89.0	222.7	7022	35.3

Table 3. Stock table by species, per acre

Species	Trees	TPA	BA	QMD	cu ft	MBF
WF	151	26.6	68.6	21.8	2191	11.0
PP	146	28.4	66.4	20.7	2289	11.5
IC	80	15.3	36.4	20.8	965	4.8
DF	73	12.5	33.2	22.0	986	4.9
SP	40	6.1	18.2	23.3	591	3.0
All	490	89.0	222.7	21.4	7022	35.3

Trees = trees tallied in the cruise; TPA, BA (sq ft/ac), cubic feet and Scribner MBF per acre by BAF expansion. Species: PP ponderosa pine, WF white fir, DF Douglas-fir, SP sugar pine, IC incense-cedar.

Unit 117: plots on the 300 ft grid (orange = QA flag)

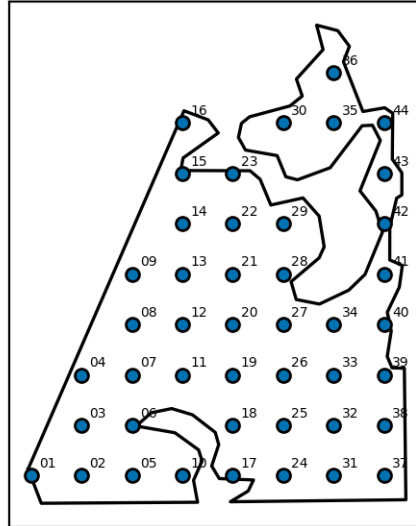


Figure 1. Plot locations with QA status.

QA findings: no issues found; unit accepted

Table 4. Plot list

Plot	Trees in	BA sq ft/ac	Slope %	Status
117-01	11	220	23	ok
117-02	12	240	37	ok
117-03	13	260	28	ok
117-04	13	260	9	ok
117-05	10	200	22	ok
117-06	10	200	39	ok
117-07	11	220	23	ok
117-08	12	240	30	ok
117-09	9	180	22	ok
117-10	11	220	21	ok
117-11	12	240	14	ok
117-12	11	220	15	ok
117-13	13	260	12	ok
117-14	12	240	18	ok
117-15	12	240	35	ok
117-16	10	200	27	ok
117-17	9	180	30	ok
117-18	11	220	20	ok
117-19	11	220	25	ok
117-20	12	240	25	ok
117-21	12	240	11	ok
117-22	13	260	9	ok
117-23	10	200	30	ok
117-24	11	220	34	ok
117-25	6	120	19	ok
117-26	11	220	27	ok
117-27	13	260	36	ok
117-28	12	240	22	ok
117-29	12	240	19	ok
117-30	13	260	25	ok
117-31	10	200	33	ok
117-32	10	200	21	ok
117-33	12	240	22	ok
117-34	11	220	10	ok
117-35	12	240	22	ok
117-36	11	220	26	ok
117-37	11	220	36	ok
117-38	13	260	17	ok
117-39	12	240	15	ok
117-40	12	240	33	ok
117-41	9	180	18	ok
117-42	9	180	33	ok
117-43	11	220	27	ok
117-44	9	180	28	ok