


Unit 104 - Field Data Review

Mohawk Valley West Slope demonstration. Method **Tractor**, 111.5 ac, BAF 20 variable-radius cruise on a 300 ft grid, 59 plots. Simulated data with planted recording errors; see docs/methods.md.

STAND DENSITY		STAND INFO	
Basal area	207 sq ft/ac (1 SE = 2.0 %)	Type	Sierran mixed conifer
Trees per acre	165	CWHR size / density	4 / D (cover 85 %)
QMD	15.2 in	SDI	300 (40 % of max 750)
SAWTIMBER (≥ 10 in)		BIOMASS (< 10 in)	
BA QMD	186 sq ft/ac 18.2 in	BA QMD	21 sq ft/ac 7.8 in
TPA	103	TPA	62
Volume	32.0 MBF/ac (5822 cu ft)	Volume	10.2 green tons/ac approx. (60 lb per cu ft)
TREATMENT TARGET		CRUISE DESIGN	
Leave	30 % of max SDI = ~155 sq ft/ac BA	Sampling error	3.9 % at 95 % (standard 18 %, R5 FSH 2409.12)
Species (BA)	PP 66, WF 61, IC 32, DF 29, SP 20	Plots	59 taken, 20 needed (CV 15 %) - MEETS

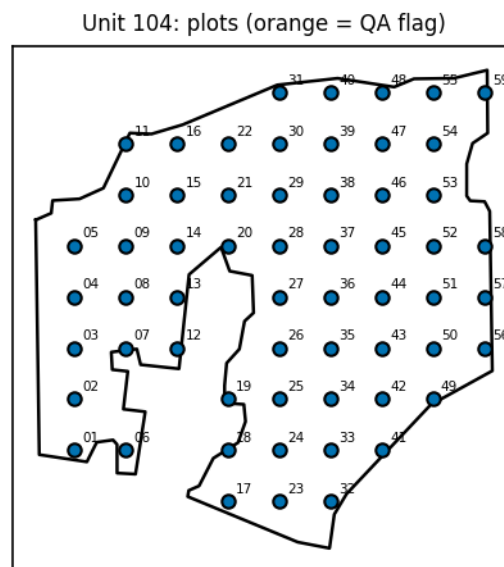

QA findings: no issues found; unit accepted

Plot list

Plot	Trees in	BA sq ft/ac	Slope %	Status
104-01	8	160.0	57	ok
104-02	12	240.0	36	ok
104-03	12	240.0	21	ok
104-04	11	220.0	35	ok
104-05	6	120.0	14	ok
104-06	10	200.0	100	ok
104-07	8	160.0	96	ok

Plot	Trees in	BA sq ft/ac	Slope %	Status
104-08	11	220.0	34	ok
104-09	8	160.0	28	ok
104-10	9	180.0	33	ok
104-11	9	180.0	94	ok
104-12	10	200.0	105	ok
104-13	11	220.0	86	ok
104-14	10	200.0	21	ok
104-15	9	180.0	42	ok
104-16	8	160.0	37	ok
104-17	11	220.0	63	ok
104-18	12	240.0	69	ok
104-19	9	180.0	167	ok
104-20	12	240.0	148	ok
104-21	9	180.0	19	ok
104-22	11	220.0	30	ok
104-23	11	220.0	84	ok
104-24	10	200.0	83	ok
104-25	12	240.0	73	ok
104-26	10	200.0	134	ok
104-27	13	260.0	60	ok
104-28	11	220.0	25	ok
104-29	8	160.0	38	ok
104-30	11	220.0	17	ok
104-31	11	220.0	54	ok
104-32	11	220.0	11	ok
104-33	11	220.0	46	ok
104-34	8	160.0	50	ok
104-35	12	240.0	38	ok
104-36	13	260.0	34	ok
104-37	11	220.0	107	ok
104-38	11	220.0	60	ok
104-39	10	200.0	32	ok
104-40	11	220.0	36	ok
104-41	11	220.0	35	ok
104-42	12	240.0	37	ok
104-43	10	200.0	31	ok
104-44	12	240.0	10	ok

Plot	Trees in	BA sq ft/ac	Slope %	Status
104-45	11	220.0	41	ok
104-46	9	180.0	123	ok
104-47	12	240.0	17	ok
104-48	9	180.0	55	ok
104-49	10	200.0	77	ok
104-50	6	120.0	40	ok
104-51	12	240.0	26	ok
104-52	12	240.0	9	ok
104-53	11	220.0	94	ok
104-54	10	200.0	21	ok
104-55	12	240.0	13	ok
104-56	11	220.0	47	ok
104-57	11	220.0	28	ok
104-58	10	200.0	43	ok
104-59	9	180.0	15	ok