


Unit 114 - Field Data Review

Mohawk Valley West Slope demonstration. Method **Tactor**, 116.3 ac, BAF 20 variable-radius cruise on a 300 ft grid, 56 plots. Simulated data with planted recording errors; see docs/methods.md.

STAND DENSITY		STAND INFO	
Basal area	212 sq ft/ac (1 SE = 2.1 %)	Type	Sierran mixed conifer
Trees per acre	93	CWHR size / density	4 / D (cover 85 %)
QMD	20.5 in	SDI	276 (37 % of max 750)
SAWTIMBER (≥ 10 in)		BIOMASS (< 10 in)	
BA QMD	208 sq ft/ac 21.6 in	BA QMD	4 sq ft/ac 7.9 in
TPA	81	TPA	11
Volume	43.4 MBF/ac (7899 cu ft)	Volume	2.1 green tons/ac approx. (60 lb per cu ft)
TREATMENT TARGET		CRUISE DESIGN	
Leave	30 % of max SDI = ~173 sq ft/ac BA	Sampling error	4.3 % at 95 % (standard 18 %, R5 FSH 2409.12)
Species (BA)	PP 65, WF 61, IC 33, DF 30, SP 22	Plots	56 taken, 20 needed (CV 16 %) - MEETS

Unit 114: plots (orange = QA flag)

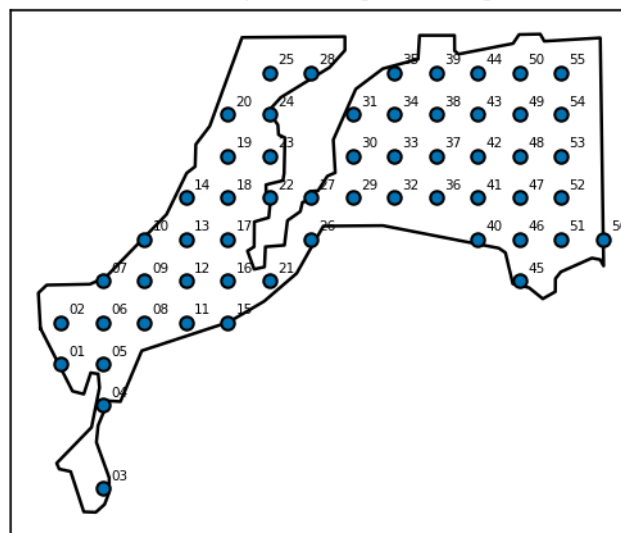

QA findings: no issues found; unit accepted

Plot list

Plot	Trees in	BA sq ft/ac	Slope %	Status
114-01	12	240.0	120	ok
114-02	9	180.0	15	ok
114-03	8	160.0	82	ok
114-04	12	240.0	117	ok
114-05	9	180.0	39	ok
114-06	11	220.0	60	ok
114-07	10	200.0	87	ok

Plot	Trees in	BA sq ft/ac	Slope %	Status
114-08	14	280.0	109	ok
114-09	11	220.0	60	ok
114-10	12	240.0	100	ok
114-11	12	240.0	62	ok
114-12	12	240.0	126	ok
114-13	9	180.0	41	ok
114-14	11	220.0	33	ok
114-15	10	200.0	122	ok
114-16	11	220.0	63	ok
114-17	11	220.0	45	ok
114-18	10	200.0	15	ok
114-19	13	260.0	23	ok
114-20	12	240.0	76	ok
114-21	12	240.0	24	ok
114-22	9	180.0	54	ok
114-23	12	240.0	36	ok
114-24	8	160.0	16	ok
114-25	12	240.0	132	ok
114-26	9	180.0	27	ok
114-27	9	180.0	21	ok
114-28	11	220.0	420	ok
114-29	8	160.0	26	ok
114-30	12	240.0	28	ok
114-31	10	200.0	56	ok
114-32	10	200.0	75	ok
114-33	12	240.0	37	ok
114-34	11	220.0	55	ok
114-35	8	160.0	52	ok
114-36	6	120.0	28	ok
114-37	13	260.0	42	ok
114-38	12	240.0	155	ok
114-39	11	220.0	22	ok
114-40	11	220.0	75	ok
114-41	10	200.0	62	ok
114-42	11	220.0	39	ok
114-43	10	200.0	41	ok
114-44	10	200.0	42	ok

Plot	Trees in	BA sq ft/ac	Slope %	Status
114-45	14	280.0	143	ok
114-46	10	200.0	75	ok
114-47	12	240.0	56	ok
114-48	8	160.0	39	ok
114-49	7	140.0	34	ok
114-50	10	200.0	31	ok
114-51	10	200.0	18	ok
114-52	10	200.0	24	ok
114-53	12	240.0	38	ok
114-54	10	200.0	26	ok
114-55	11	220.0	23	ok
114-56	13	260.0	19	ok