

Report on the Development of GSI-based WRF 4DVAR

ACAPS 2010 SoW Task 3.1.b

XIN ZHANG AND XIANG-YU HUANG

MMM, National Center for Atmospheric Research, Boulder, CO 80305

Acknowledgements

We would like to thank Dr. Ricardo Todling for his help to kick off the project and Dr. Thomas Auligne, Dr. Junmei Ban, Mrs. Xiaoyan Zhang, Mr. Feng Gao for their help and encouragement.

ABSTRACT

The Boulder repository GSI code is coupled with the WRF tangent linear adjoint model and the GSI-based WRF 4DVAR has been developed. Several experiments are conducted to validate this 4DVAR system and all results confirm the performance of the GSI-based 4DVAR system.

1. Upgrades of WRF tangent linear and adjoint model

To couple the WRF tangent linear and adjoint model (WRFPLUS) with GSI, the subroutine interfaces for WRF tangent linear and adjoint have been constructed. Some other subroutines, such as save/read basic states, perturbations and adjoint forcing are also coded. Furthermore, the WRFPLUS has been upgraded to the latest WRF repository and the adjoint check can achieve 15-16 digital identical. Now, we are working on the parallelization of WRFPLUS.

2. Coupling GSI with WRFPLUS

A module named wrf_pertmod.F90, has been coded to serve as the coupler or hub between GSI and WRFPLUS. It is the only new add-on file in source codes. It includes the interfaces to call WRF, WRF_TL and WRF_AD separately. It also includes the subroutines conducting the transfer of state variables between GSI space and WRF space and their adjoint.

At this moment, the GSI-based WRF 4DVAR can run with 1-processor parallel run due to the undergoing WRFPLUS parallelization. We have tested

the system on IBM with XLF compiler and Linux with PGI compiler.

3. Single Observation test

4DVAR approach has the capability to implicitly evolve the static background error statistics. Single observation is the best way to demonstrate the property of 4DVAR. The analysis time is 2000-01-25-00 and the 4DVAR time window is 6 hours. A single 500mb temperature at (32.5,-72, marked as a red star) is assimilated at the end of the time window on 2000-01-25-06. Figure 1 shows the hourly increments between the 6-hour control run (from first guess) and analysis run (from 4DVAR analysis).

The maximum of analysis increment at 0h is on the upstream and it evolved with time follow the wind stream. Eventually, at the end of time window, the maximum arrives the observation location and the pattern of the increment has the flow dependent property.

4. 3-day real case

A 3-day CONUS domain, see Figure 2, are setup to run experiments to verify the performance of the GSI-based WRF 4DVAR system. The domain size is 47x32x28L, horizontal resolution is 135km; The Initial conditions and boundary conditions at every 6h are prepared from 2007-09-10-00 to 2007-09-13-00 and the initial conditions are the 12h forecast from NCEP FNL analysis; the NCEP GDAS prepbufr data will be used in assimilation.

We ran 3 experiments to compare the performance of the data assimilation. The first experiment is the CONTROL run without data assimilation, 48h forecast are made four times per day. The second experiment (3DVAR) is the 48h forecast from 3DVAR analysis four times per day. The third experiment (4DVAR) is the 48h forecast from 4DVAR analysis four times per day. Then, all the 48h forecasts are verified again the NCAR archived LITTLE_R format observation.

Figure 3 to Figure 11 show the profile RMSE from 0h to 48h forecast. At 0h, the 3DVAR gets the smallest profile RMSE overall as 3DVAR uses more observations in 0h than 4DVAR; At 6h, 4DVAR is the best, it is reasonable because 4DVAR uses the observations at 6h; In the subsequent forecast,

4DVAR experiment wins the verification and confirm our expectation. In the future, we will conduct higher resolution and longer period runs to further confirm the benefit of the 4DVAR.

List of Figures

1	Hourly increment evolution from 0h to 6h	8
2	domain configuration	9
3	Profile RMSE at 0h	10
4	Profile RMSE at 6h	11
5	Profile RMSE at 12h	12
6	Profile RMSE at 18h	13
7	Profile RMSE at 24h	14
8	Profile RMSE at 30h	15
9	Profile RMSE at 36h	16
10	Profile RMSE at 42h	17
11	Profile RMSE at 48h	18

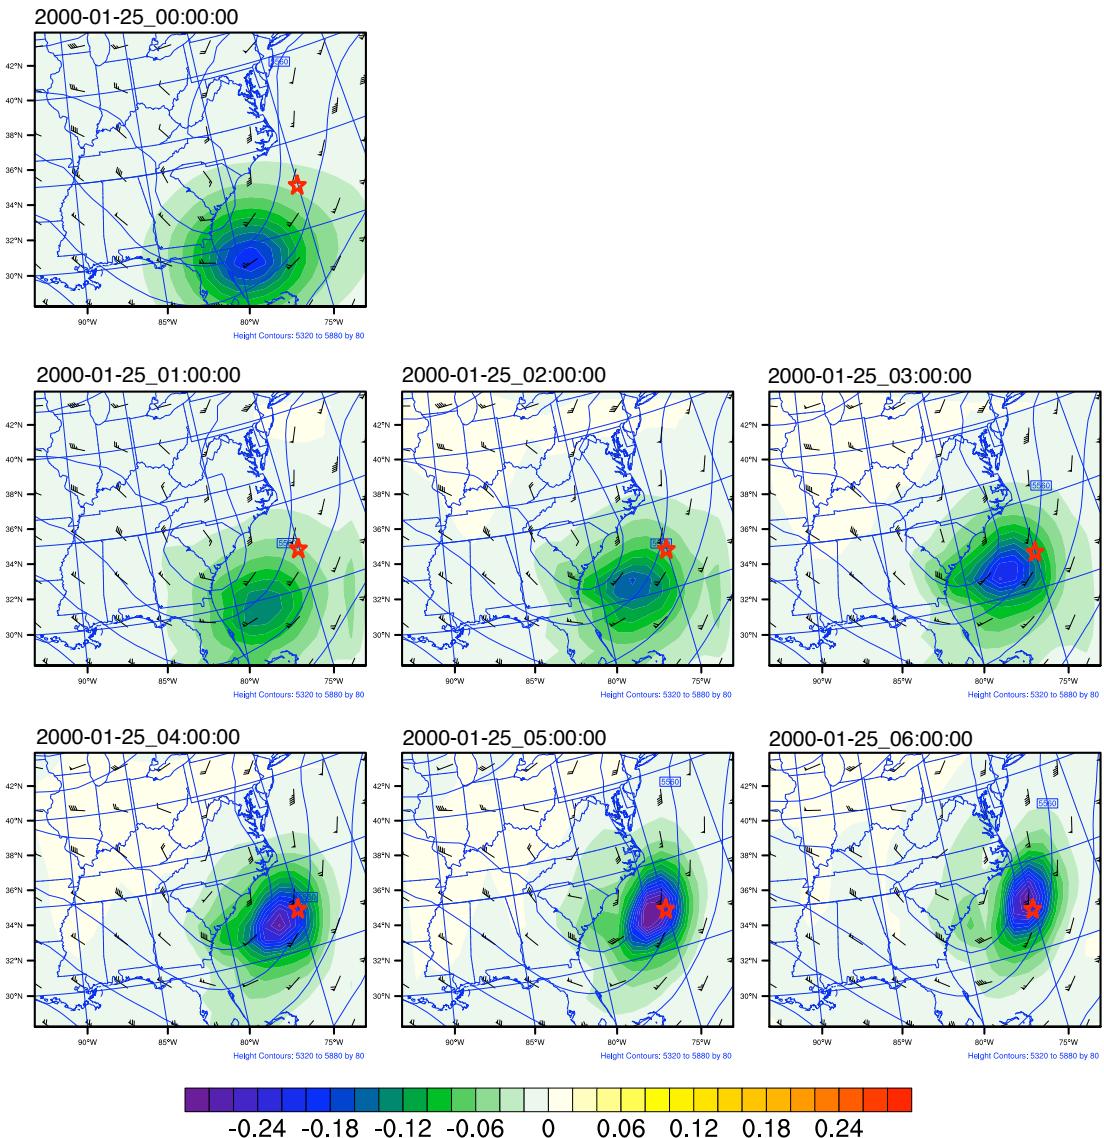


FIG. 1. Hourly increment evolution from 0h to 6h

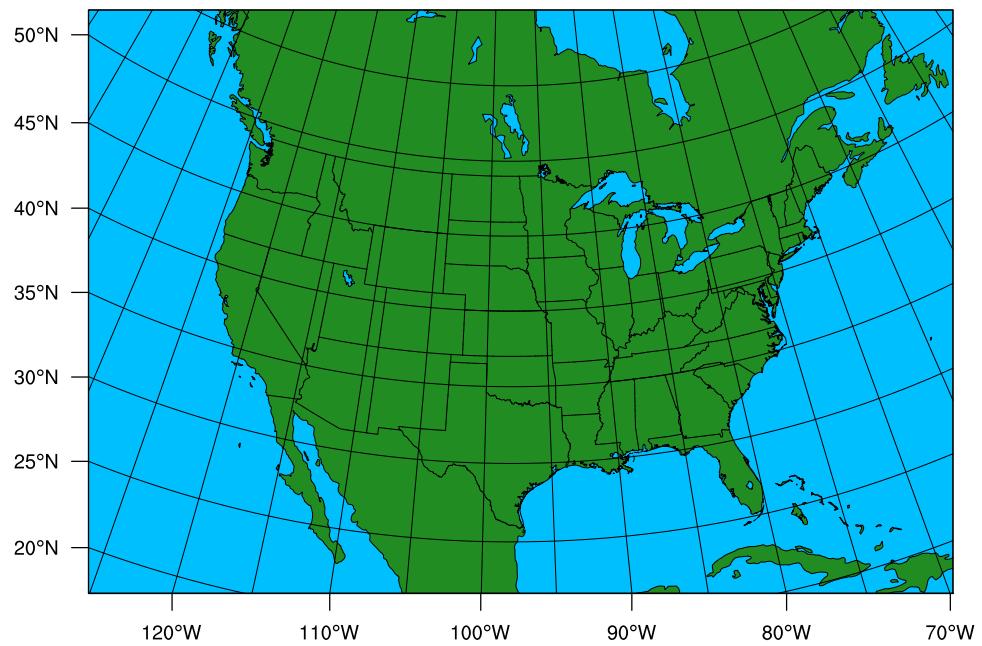


FIG. 2. domain configuration

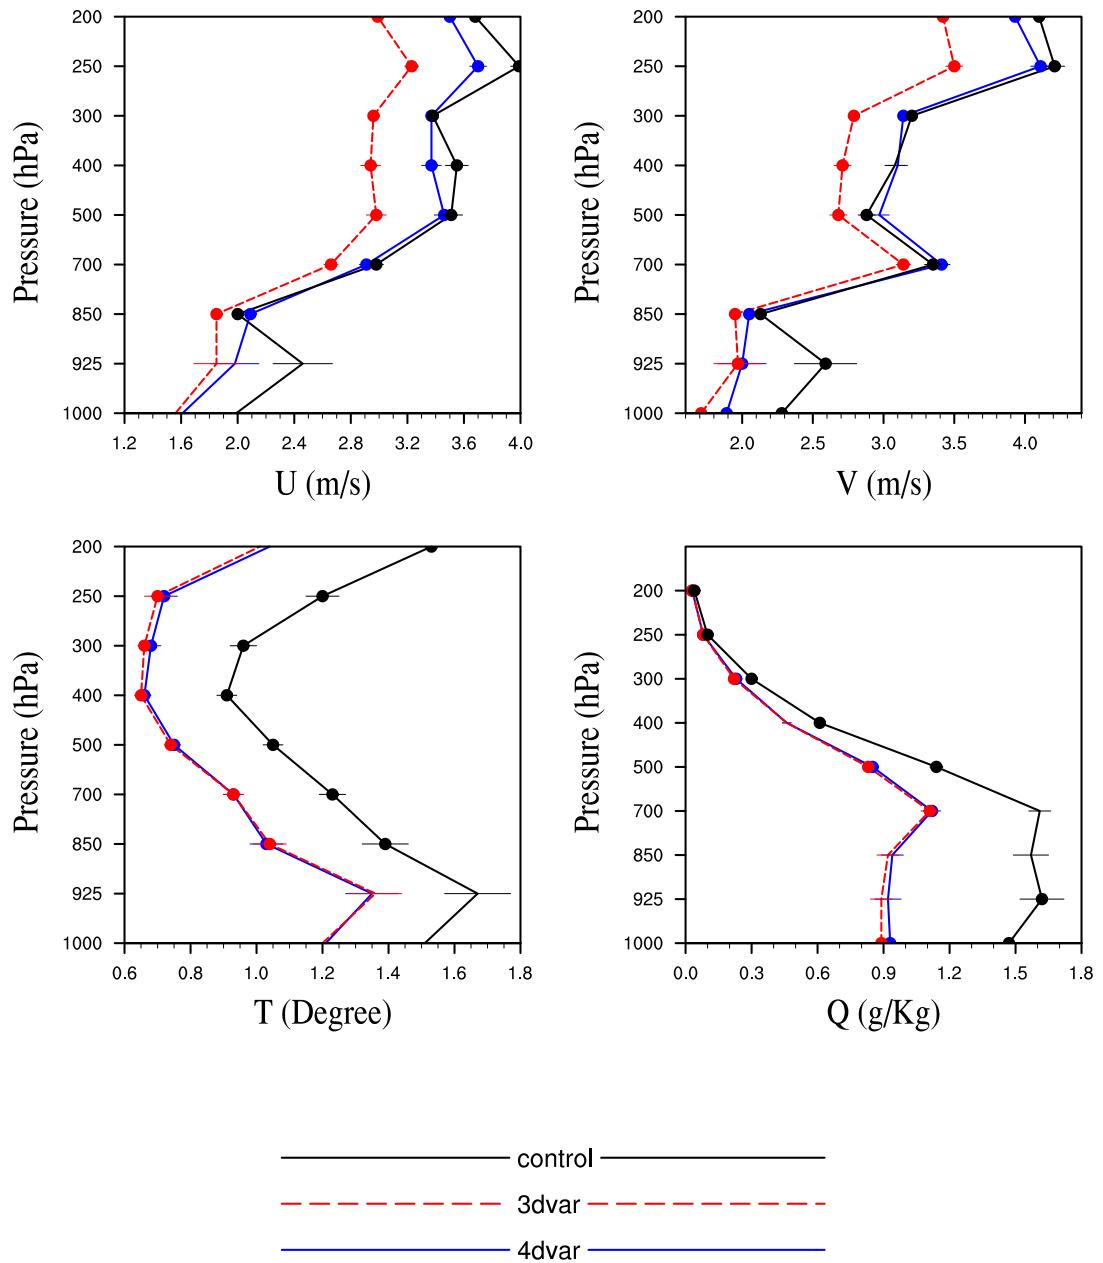


FIG. 3. Profile RMSE at 0h

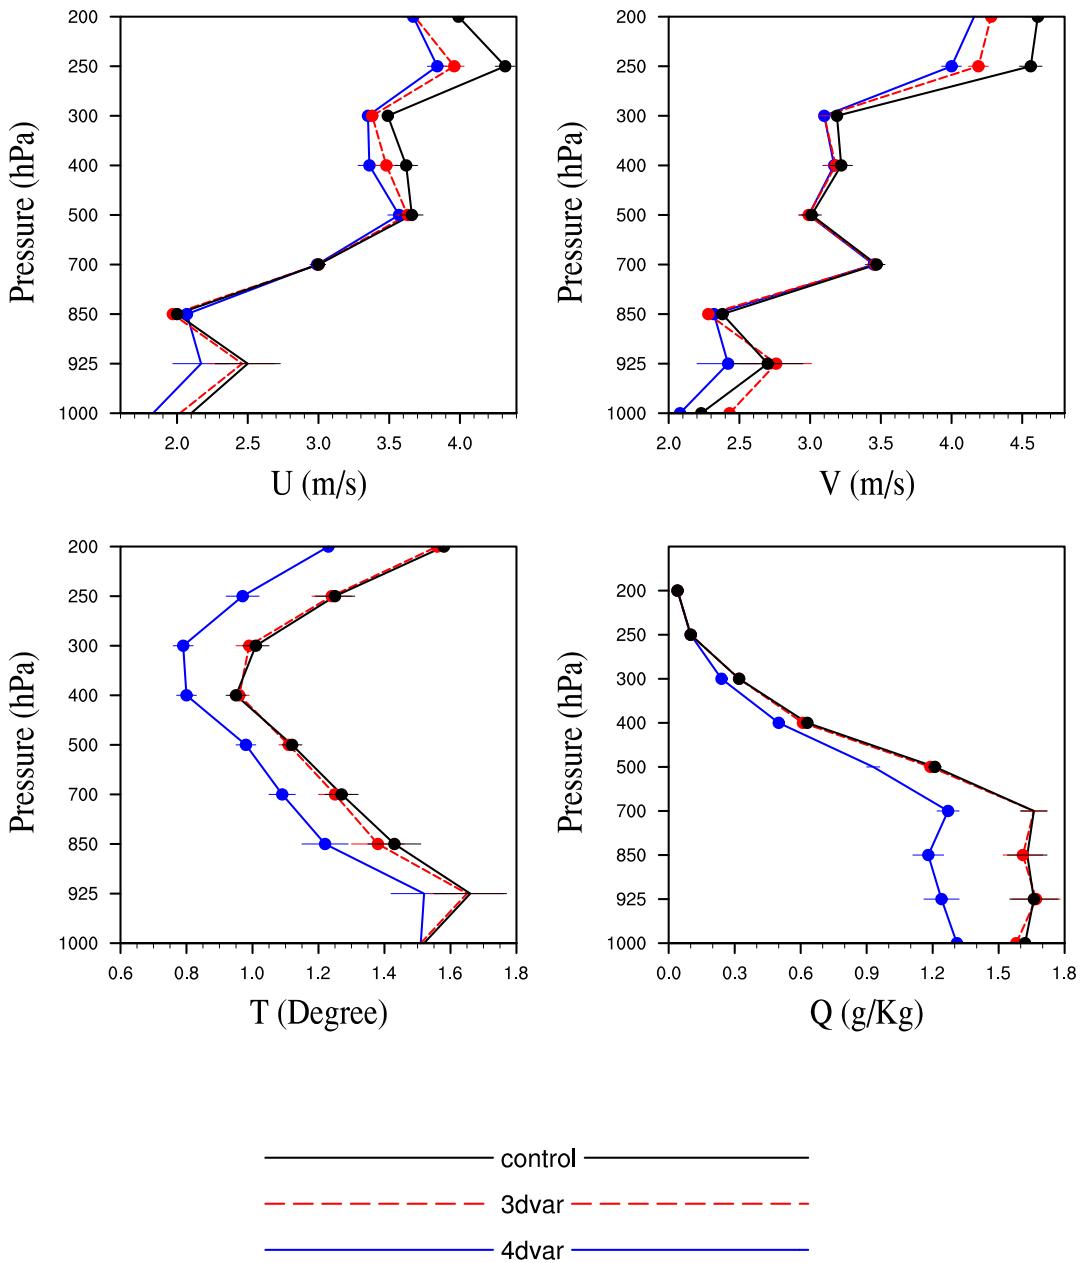


FIG. 4. Profile RMSE at 6h

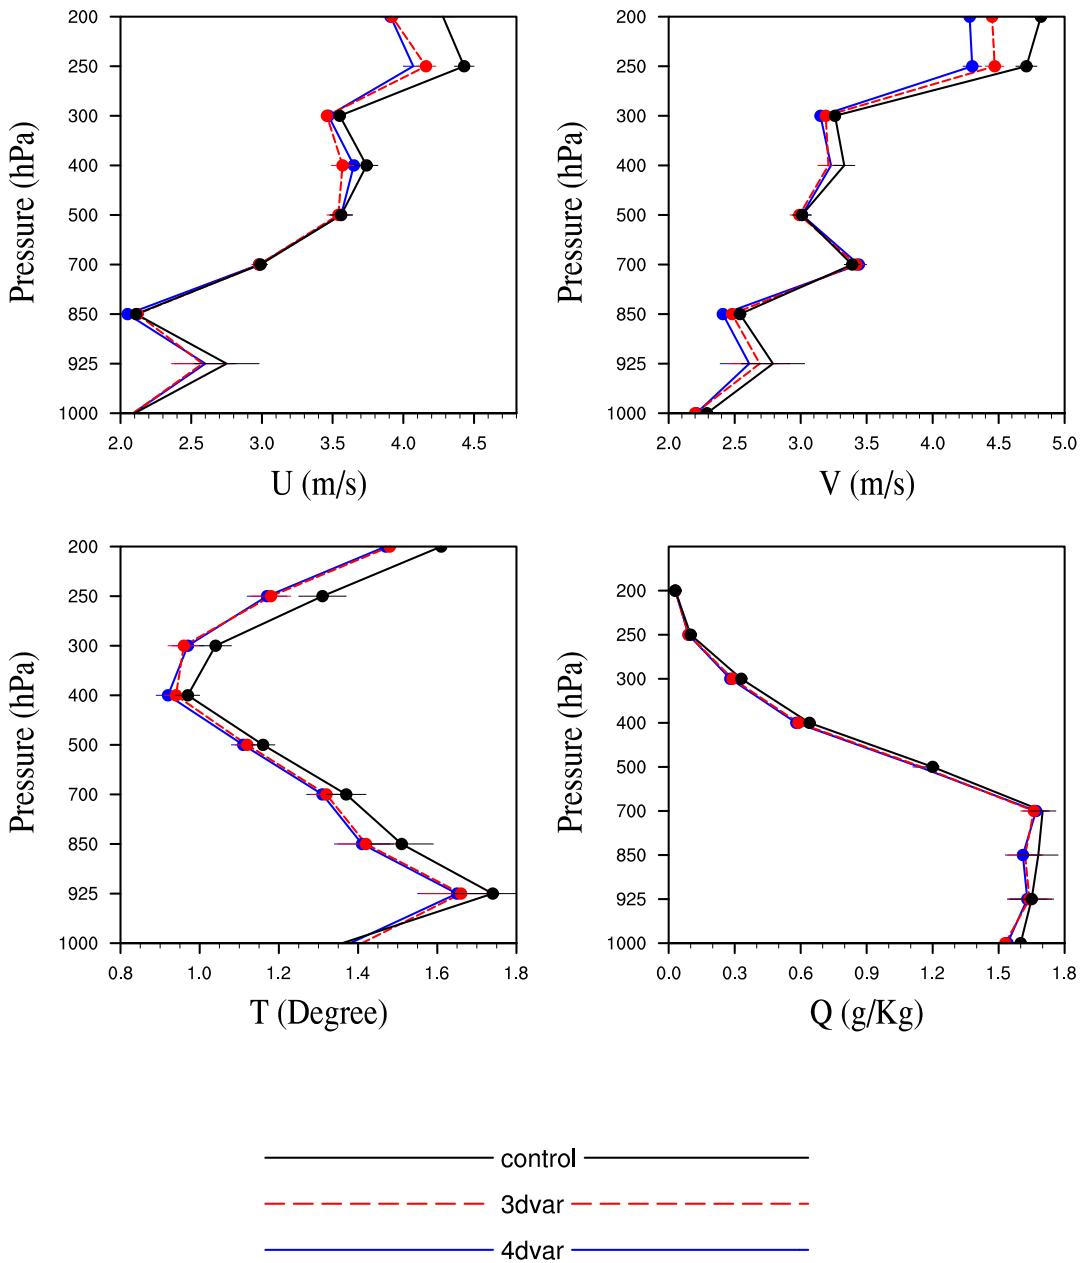


FIG. 5. Profile RMSE at 12h

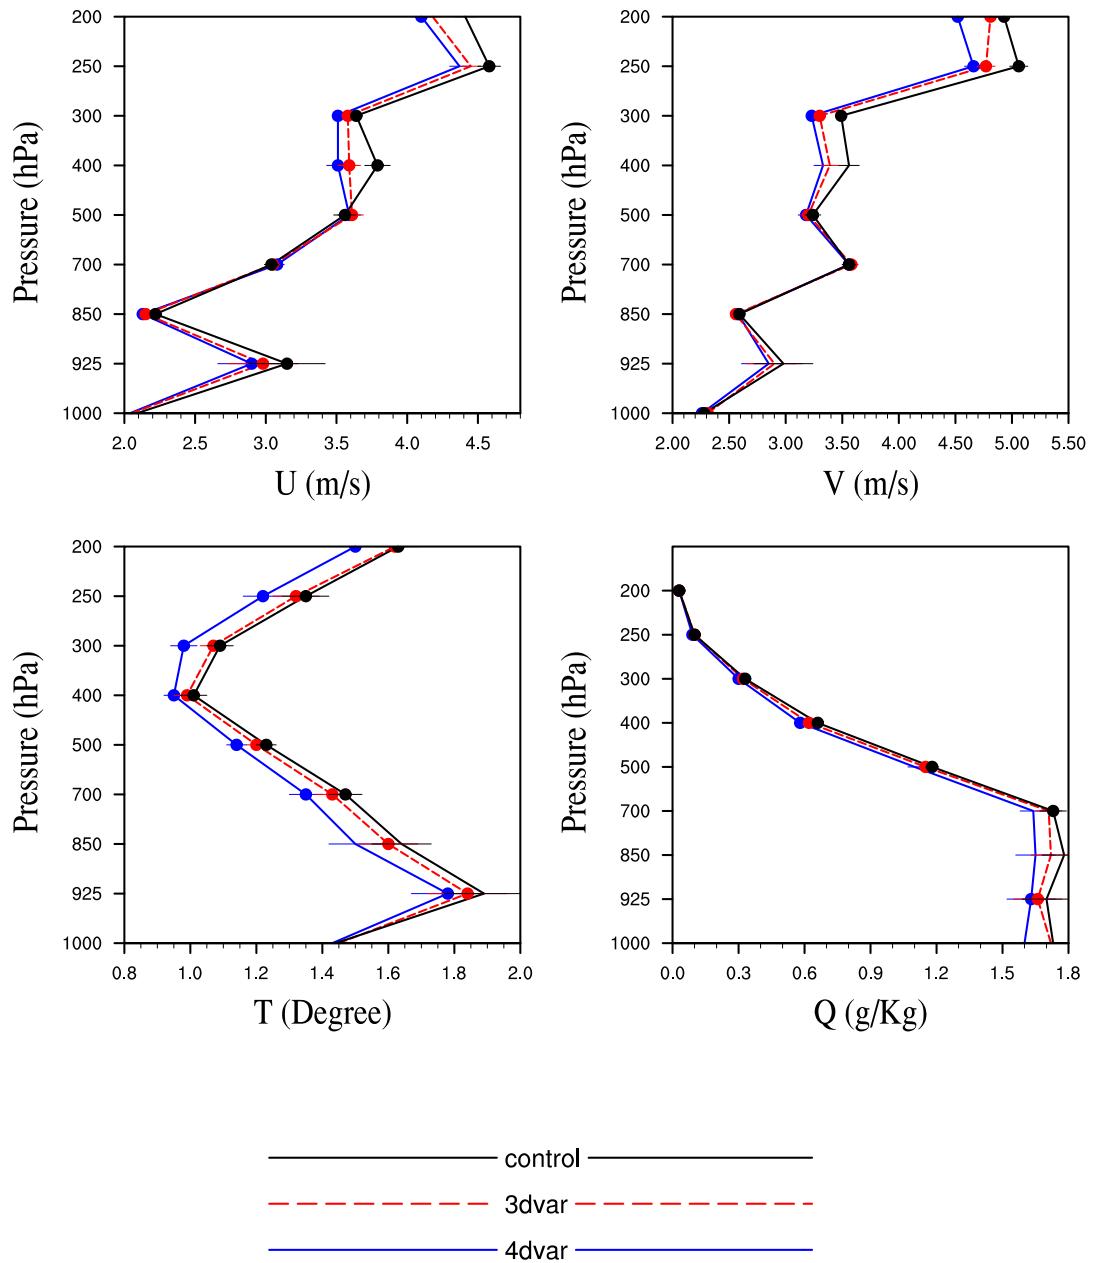


FIG. 6. Profile RMSE at 18h

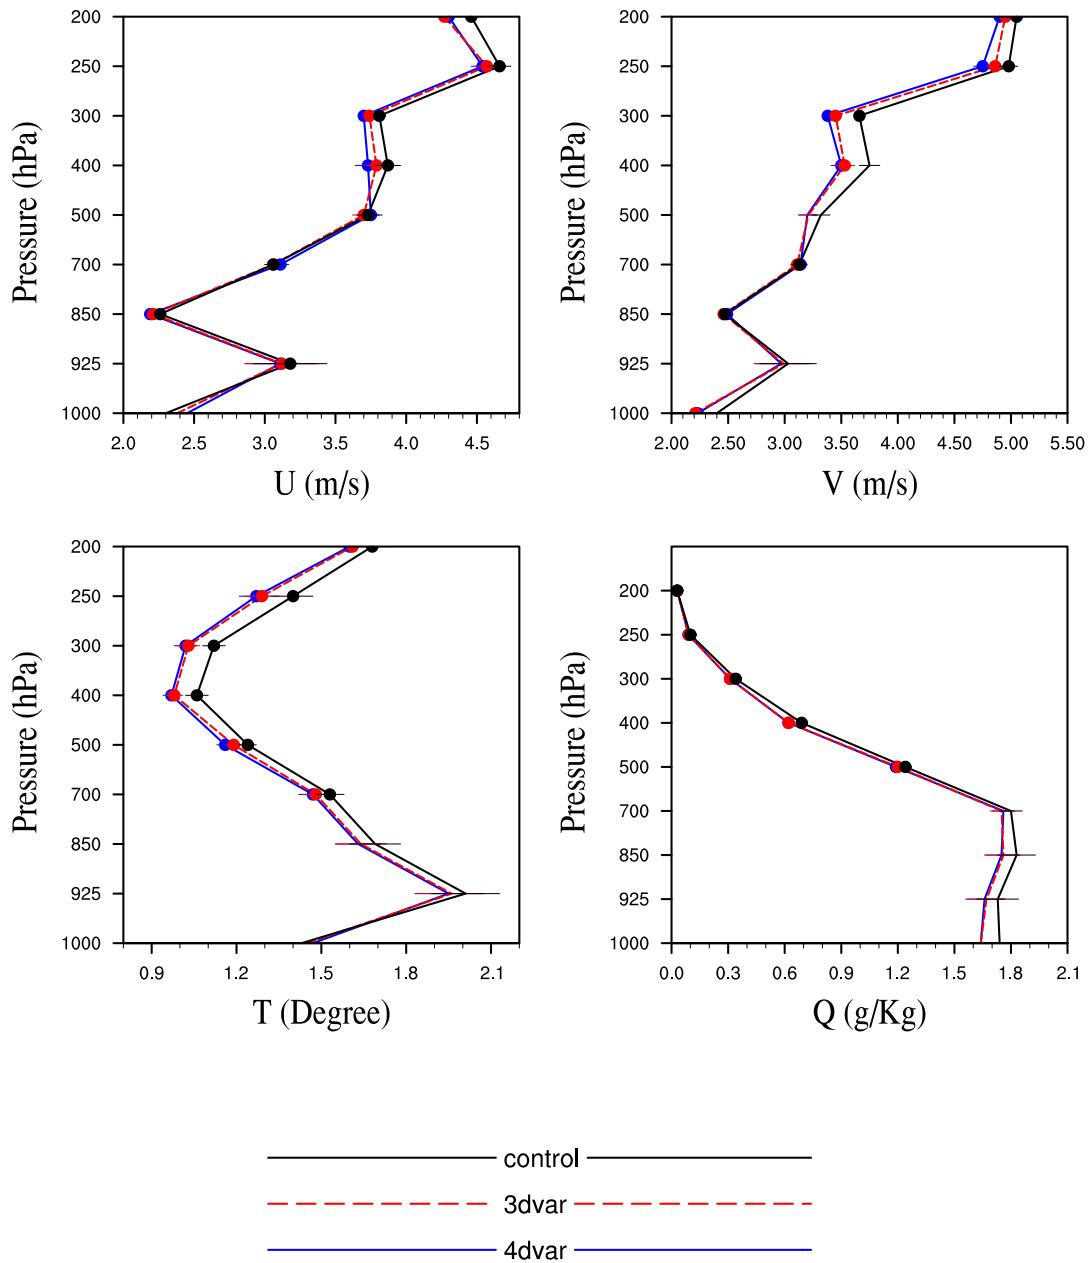


FIG. 7. Profile RMSE at 24h

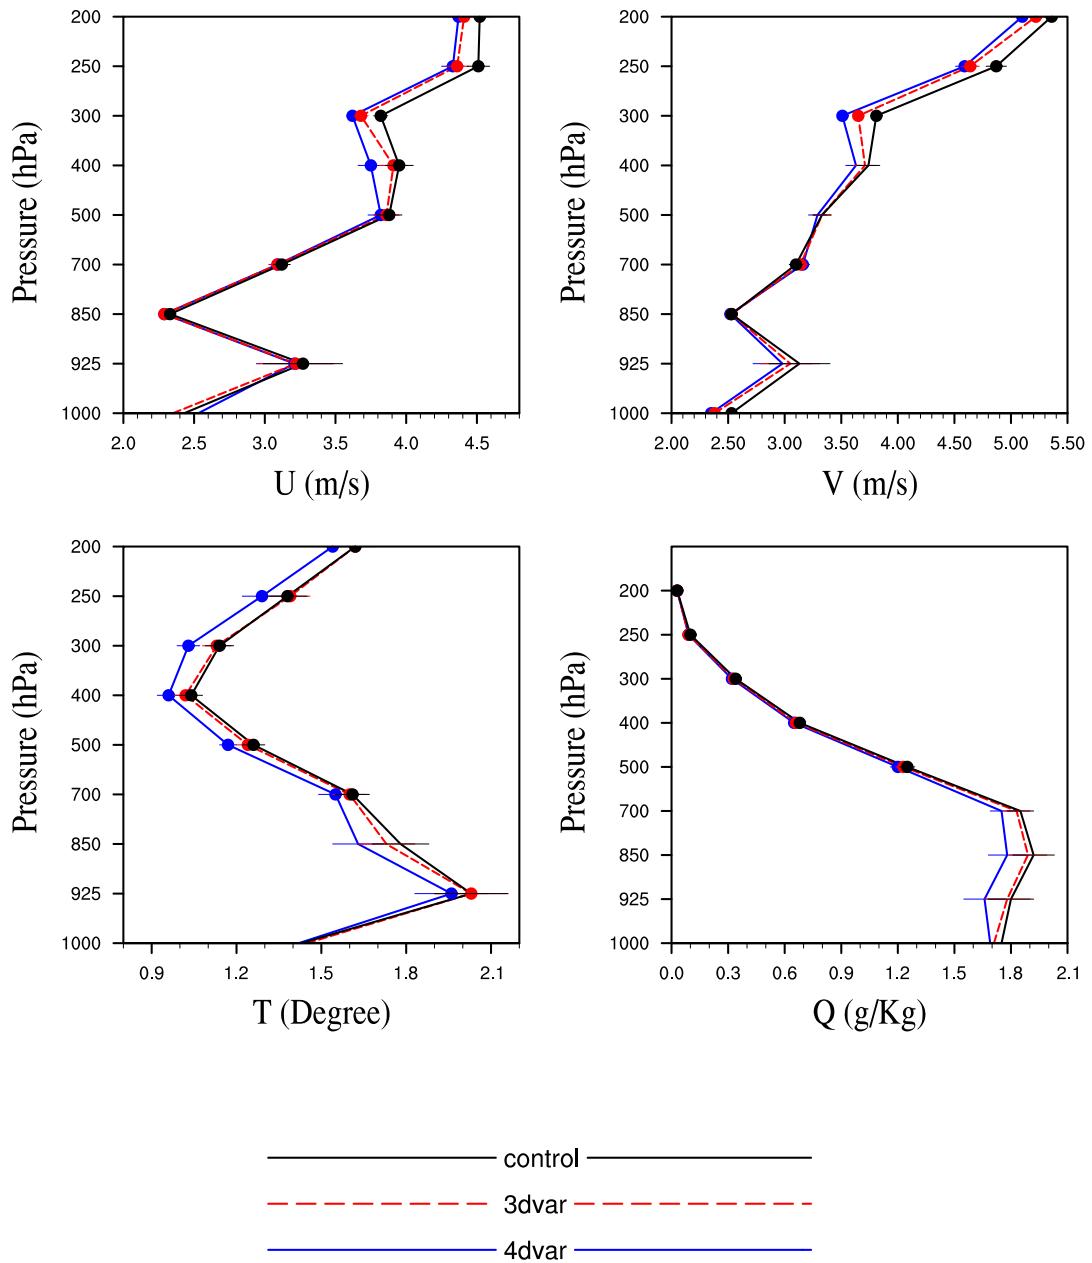


FIG. 8. Profile RMSE at 30h

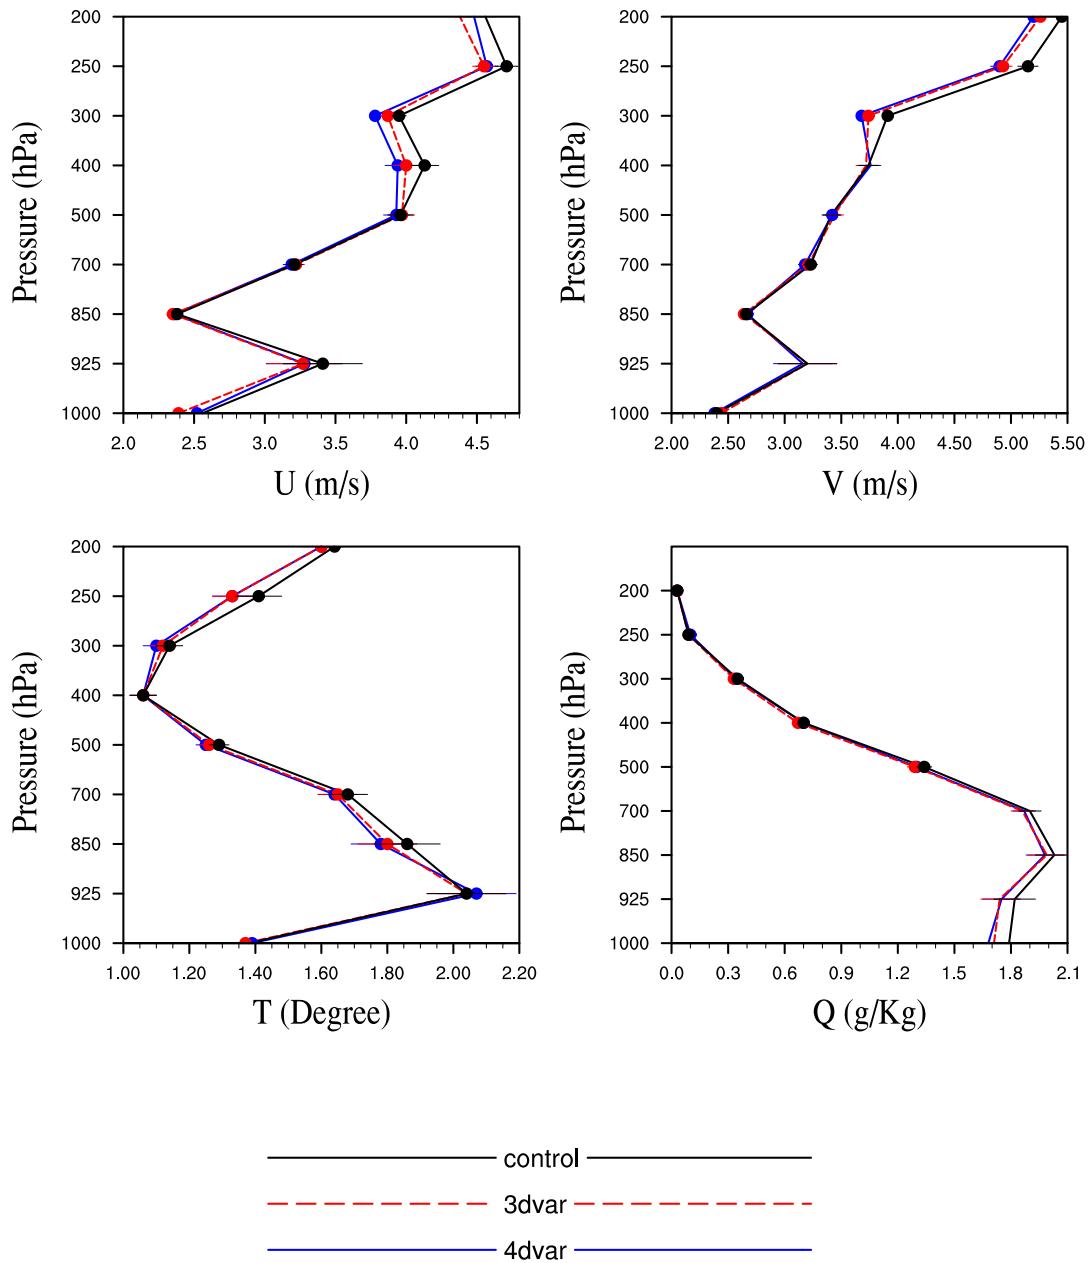


FIG. 9. Profile RMSE at 36h

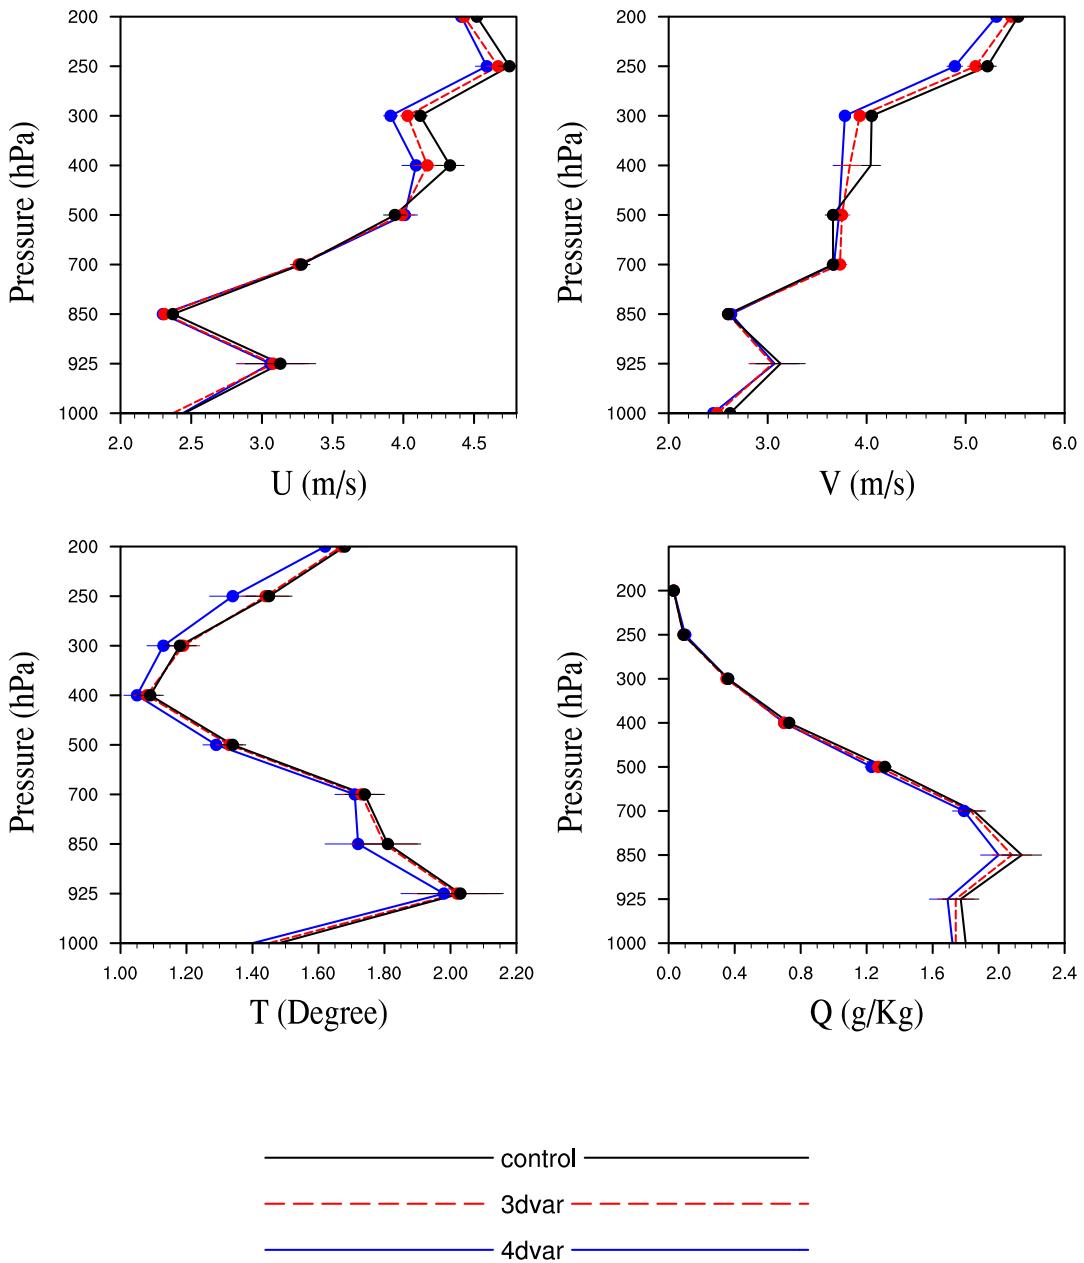


FIG. 10. Profile RMSE at 42h

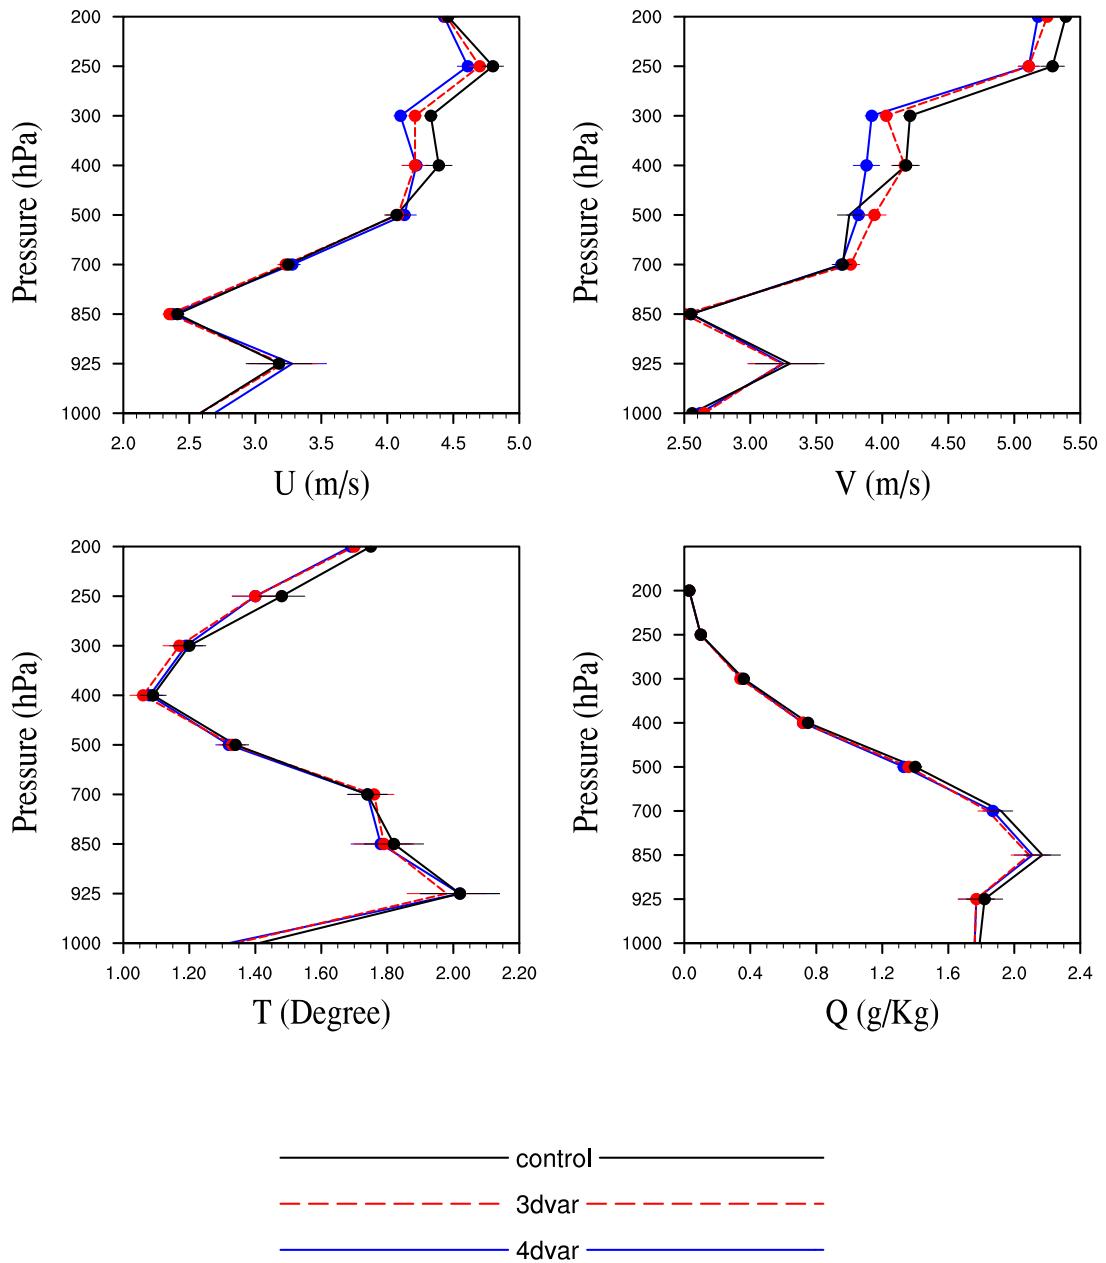


FIG. 11. Profile RMSE at 48h