# lab3 straingauge

September 21, 2019

## 1 Lab 3: Strain Gauge

In this lab, a strain gauge was created using a Wheatstone bridge. Calibration measurements were taking using known masses and one unknown mass was measured, which will be calculated by using a linear regression of the calibration data.

```
[1]: import pandas as pd
import numpy as np
import matplotlib.pyplot as plt
%matplotlib inline
```

## 1.1 Hardware Setup

A strain gauge was epoxied to a metal rod to measure deflection. The rod was clamped onto a table, and the weight was hung off the end of the rod.

A Wheatstone bridge was constructed to precisely measure the resistance across the strain gauge, which changes based on the load on the rod. The Wheatstone bridge outputs a voltage differential which is amplified using a voltage amplifier. This allows the small changes in resistance to be read at a higher sensitivity by the analog discovery.

#### 1.2 Raw Data

Five calibration data points were taken with known weights, and the mass and voltage was recorded here. A sixth weight was taken of an unknown mass which will be calculated.

```
# Raw Data
# Calibration data in (mass (g), voltage (V))
calibration_data = [
          (0, 0.001),
          (8.7, 0.051),
          (20.4, 0.092),
          (47.3, 0.16),
          (72.1, 0.25),
]


calibration_data_df = pd.DataFrame(calibration_data)
calibration_data_df.columns = ['Mass', 'Voltage']
calibration_data_df.set_index('Voltage', inplace=True)
```

```
unknown = 0.27
```

### 1.2.1 Data Analysis

The calibration data is fairly linear, so the mass of the weight can be modeled with a simple linear gain from the voltage. The voltage was also calibrated using a potentiometer to have a 0V differential when the mass is 0.

## [3]: Text(0, 0.5, 'Mass (g)')

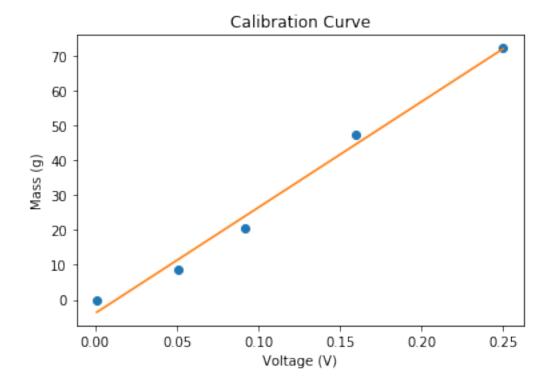

## 1.2.2 Calculate the unknown mass

[]:

Using this linear fit, the mass of the unknown object can be calculated. Unfortunately, because the voltage is out of range, this is an extrapolation, which may be less accurate than a value that is interpolated for. Realistically, the calibration values should span the entire range of the sensor, and the unknown values should be within this range.

[4]: # Calculate value of unknown mass cal(unknown)

[4]: 77.98610478842225

3