



TG3D Possum box assembly instructions

The TG3D possum box is a strong, robust possum home. It comes in 2 sizes

- Brushtail - identified with a brushtail carved into the sides and a 120mm entrance
- Ringtail - a smaller box with a ringtail possum carved into the sides.

The boxes are constructed of “C/D” grade 12mm plywood. The “C” side (the better quality side) on the outside of the box to simplify painting. There will be marks and occasional top surface knots on the material which will not affect the functionality or durability of the box. Plywood is dimensionally stable and the box should slot together however a tiny bit of “encouragement” might be needed. The CNC cut is designed to be tight to assist in excluding water from the joints..

The box is machine cut using a “Computer Numeric Control” (CNC) router. This provides accurate joins and makes the boxes simple to assemble. It is screwed, not nailed, for strength, durability and water resistance. The screw holes are pre drilled and countersunk.

A feature of the box is a separate “mount” which helps get the box (which weighs 5Kg) into position. The mount can be screwed in, straps attached to the mount or using the supplied rope holes.

The kit is supplied with sufficient screws to assemble the box and the mount. You will need to supply mounting screws however two type 17 screws about 75mm long would hold it in a tree.

Tools required.

- #2 Phillips head screwdriver. A power screwdriver will make this job faster however make sure you turn the torque settings down. This also allows you to “set” the screws more accurately. Flush with the top surface is sufficient.

- Sandpaper. 120 grit should be sufficient. Use this to sand the completed box prior to painting. A small orbital sander works well if you have one but hand sanding won't take long.

Parts

The box is supplied with the following parts


- Base - starting point
- Front - identified by the TG3D logo
- Perch - this is assembled into the front first
- 2 sides - there is a left and a right side. The front edge is the small edge
- Back
- Top
- Mount
- Mount arms - there are 2 of these.

Assembly

Start with the front. Remember that timber can have minor warps although plywood is normally dimensionally stable.



Take the perch and push the 2 tabs into the matching slots on the front. Turn the front over and put in the 2 screws, from the back, to secure it into the front. The tabs should protrude as they provide a step to help juveniles leave the box.

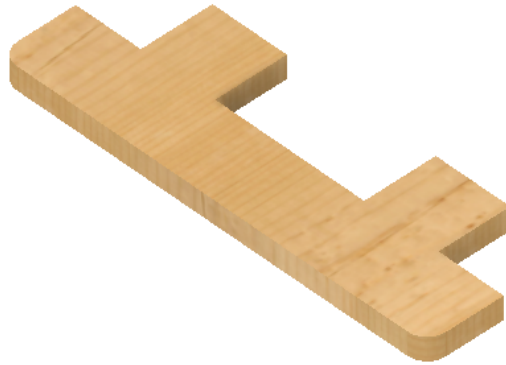

The view from the rear (internal) should look like



Next step is the base. It has the drain holes pre-drilled. Place the “C” (better) side face down on the bench. Offer the front up to the base and push the tab into the slot. Place a screw in the pre-drilled hole but do not tighten it fully.

The next step is the sides. It doesn't matter which one you choose. The possum motif is designed to go on the outside. Offer the side up to the base and front. The tabs will engage with the slots.




Place a screw in the side and engage the front, repeat for the base. Look to use the screws to pull the box together. Once you have the side aligned, put the rest of the screws, that intersect the base and front in and start to tighten. The joints should close up. Remember to flip the box up and put the screw in from the base as well. At this point the construction should be getting more rigid.

The next step is the opposite side. Repeat the above procedure, again progressively tightening the screws to pull the joints together.



The next piece is the back. The slots go towards the top of the box. Once again, fit the back and progressively tighten the screws. Remember the screws in the base that secure the front, sides and back as well.

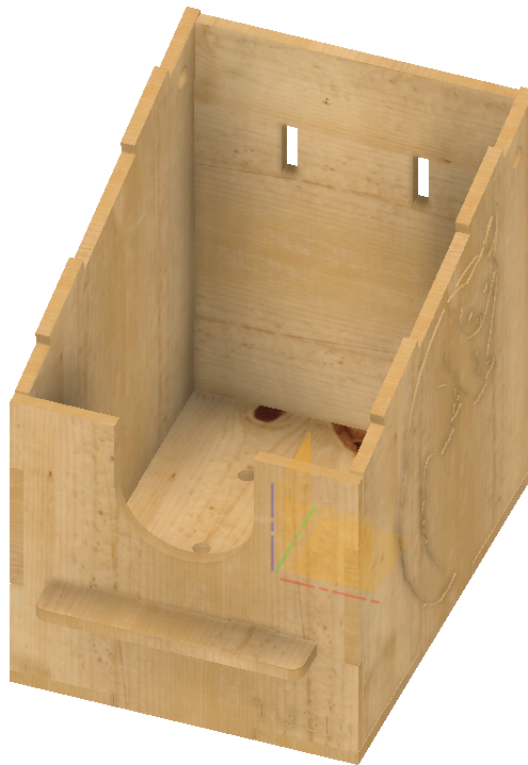

Before you secure the top, lightly sand the front at its top as it is harder to access once the top is secured. Next step is the top. It should pop into place overhanging the entrance hole. The same procedure applies where you tighten the screws to bring all the joints together.



At this point the box is assembled! Congratulations. Check all the sides for missing screws, there are 62 of them.

The final step is the mount. Place the mount arms into the slots in the back of the box to assist in alignment. They go into the slots and are pushed up to engage the “hook” portion on the arms. Place the mount on the two as shown and check for alignment. There are 4 screws in the back of each arm.



Finishing

Give the box a light sand and paint it in your desired colour. Paint the mount too.

2 coats of quality exterior grade paint to all outside surfaces to prolong the life of the box. We recommend Dulux Weathershield. Paint the box once assembled. Do not paint the inside. Possums aren't super fussy about interior decor however they probably shouldn't be chewing on the paint.

Mounting

Locate it an area that doesn't receive full sun in summer - east to south would stop the possum from cooking is suggested.

The mount is optional but the box weighs 5 kg and the mount, which weighs 500gm, makes mounting easier. There are a couple of options depending on location etc.

- A. Use some type 17 screws and predrill the mount for these. Screw the mount to the tree/post/wall and drop the box on to the mount.
- B. There are 2 holes in the mount arms. Use some rope to secure the mount to the tree. Hang the box on to the mount. You might need to consider a bottom brace, under the box against the tree.

- C. Steel straps. Use some straps similar to bracing straps used in building. Loosen the screws holding the arms to the mounts and pop the arms back (about 2mm) so put the straps under the arms. Tighten the screws again. Using the straps, secure the mount into the tree and then drop the box on to the mount.