

# MICROSAR Classic CAN Interface

## Technical Reference

Version 8.03.01

|        |          |
|--------|----------|
| Author | visgaz   |
| Status | Released |

## Document Information

### History

| Author         | Date       | Version | Remarks  |
|----------------|------------|---------|--|
| visseu, visrna | 2012-07-17 | 5.00    | ASR R4.0 Rev 3   |
| visseu         | 2013-04-03 | 5.01.00 | ESCAN00065368<br>ESCAN00066338<br>ESCAN00066340<br>Adapted according to ESCAN00066285<br>Adapted according to ESCAN00065289<br>ESCAN00066396<br>Adapted according to ESCAN00064304 |
| visrna         | 2013-07-24 | 5.01.01 | ESCAN00066794  |
| visseu         | 2013-09-27 | 6.00.00 | Adapted due to:<br>AR4-307: J1939 support<br>AR4-438: Dynamic address lookup table<br>AR4-397: CAN FD support  |
| visseu         | 2014-05-19 | 6.01.00 | CAN FD support extended: Rx-FD and Rx- and Tx-PDUs with up to 64 bytes payload   |
| visrna         | 2014-07-10 | 6.02.00 | Multiple CAN Driver support  |
| visseu         | 2014-08-25 | 6.02.00 | ESCAN00077304, Restriction concerning the handling of FD/Not-FD FullCAN-Rx-PDUs added  |
| visseu         | 2014-09-22 | 6.02.00 | ESCAN00078524, CanTSyn added, Post-build selectable  |
| visseu         | 2014-11-25 | 6.03.00 | Channel specific J1939 dynamic address   |
| visseu         | 2015-01-26 | 6.04.00 | Chapter 2.8 adapted to changed implementation  |
| visseu         | 2015-05-18 | 6.05.00 | Adapted due to FEAT-366  |
| visseu         | 2015-11-20 | 6.06.00 | Adapted due to FEAT-1429   |
| visseu         | 2016-01-09 | 6.06.00 | ESCAN00087340  |
| visseu         | 2016-02-22 | 6.07.00 | Feature Extended RAM-check added, ESCAN00087587  |
| visseu         | 2016-06-24 | 6.08.00 | Feature: Data checksum added   |
| visseu         | 2016-09-14 | 6.09.00 | Adapted due to FEAT-2076: Behavior of Tx-PDU filter extended   |
| visseu         | 2016-09-26 | 6.09.00 | Adapted due to FEAT-2024: Set reception mode   |
| visseu         | 2017-01-09 | 6.10.00 | Improved due to ESCAN00093454  |
| visseu         | 2017-02-13 |         | Adapted due to: FEAT-2140: TMC Checksum - Release feature FEAT-1914  |
| visseu         | 2017-02-28 |         | ESCAN00094196, deviation from AUTOSAR documented by ESCAN00094121 added  |
| visseu         | 2017-08-04 | 6.11.00 | ESCAN00096181  |

| Author | Date       | Version | Remarks   |
|--------|------------|---------|---|
| visseu | 2017-08-30 | 6.11.01 | Typos corrected   |
| visgaz | 2018-07-11 | 6.12.00 | Added API description for CanIf_CheckBaudrate() (ESCAN00094506),<br>extended Service IDs in Table 2-9,<br>extended error codes in Table 2-10,<br>removed CanIf_InitController() in chapter 2.3.1,<br>removed CanIf_Hooks.h in Table 3-1 |
| visgaz | 2019-02-04 | 6.13.00 | Removed obsolete Service ID in Table 2-9,<br>replaced CAN channel with CAN controller in Table 2-10,<br>reworked Chapter 5,<br>added BusMirroring feature   |
| visgaz | 2019-02-27 | 6.14.00 | Adapted deviation 7.2.5 Check wakeup,<br>added Tx-PDU truncation feature  |
| visgaz | 2019-06-12 | 7.00.00 | Reworked Feature List and document structure,<br>added API descriptions for<br>CanIf_ClearTrcvWufFlag() /<br>CanIf_CheckTrcvWakeFlag() (ESCAN00103412),   |
| visgaz | 2020-01-22 | 7.01.00 | Reworked Chapter 3.2 - Critical Sections (ESCAN00104612),<br>Reworked API descriptions  |
| visgaz | 2020-06-04 | 7.02.00 | Added possible blocking situation description for Tx-Buffer of type FIFO to Chapter 2.5.3.1   |
| visgaz | 2020-08-04 | 7.03.00 | Added security event reporting feature,<br>made formal adaption   |
| visgaz | 2020-08-31 | 7.04.00 | Added error code<br>CANIF_E_TX_BUFFER_TRANSMIT  |
| visgaz | 2020-11-23 | 7.05.00 | Adapted security event reporting feature according to AR20-11 (CAN-1989)  |
| visgaz | 2021-01-04 | 7.06.00 | Added priority description for BasicCAN Rx-PDUs to Chapter 2.6.1 (CAN-1972)   |
| visgaz | 2021-01-18 | 8.00.00 | Made formal adaption (CAN-2032),<br>Added new used VStdLib APIs to Table 4-33 (CAN-36)  |
| visgaz | 2021-02-22 | 8.00.01 | Adapted CanIf_MemMap.h description in Table 3-1 (CAN-2567)  |
| visgaz | 2021-03-11 | 8.01.00 | Added support ASR4.4.0 CAN Driver feature (CAN-2553)  |
| visgaz | 2021-05-05 | 8.02.00 | Removed support of configuration variant Link-Time (CAN-2592), Adapted CanIf_MemMap.h description (CAN-2588)  |
| visgaz | 2022-02-25 | 8.03.00 | Added multi-partition support (CANCORE-463),<br>renamed MICROSAR to MICROSAR Classic  |

| Author | Date       | Version | Remarks  |
|--------|------------|---------|--|
| visgaz | 2022-03-25 | 8.03.01 | Improved multi-partition support description (CANCORE-1052) and MICROSAR Classic wording |

## Reference Documents

| No. | Source  | Title                                 | Version |
|-----|---------|---------------------------------------|---------|
| [1] | AUTOSAR | Specification of CAN Interface        | R4.2.2  |
| [2] | AUTOSAR | Specification of Default Error Tracer | R4.2.2  |
| [3] | AUTOSAR | List of Basic Software Modules        | R4.2.1  |



### Caution

We have configured the programs in accordance with your specifications in the questionnaire. Whereas the programs do support other configurations than the one specified in your questionnaire, Vector's release of the programs delivered to your company is expressly restricted to the configuration you have specified in the questionnaire.

## Contents

|          |   |           |
|----------|---|-----------|
| <b>1</b> | <b>Introduction.....</b>                    | <b>12</b> |
| 1.1      | Architecture Overview .....                 | 12        |
| <b>2</b> | <b>Functional Description .....</b>         | <b>13</b> |
| 2.1      | Features .....                              | 13        |
| 2.1.1    | Deviations .....                            | 14        |
| 2.1.1.1  | Deviation API: CanIf_CancelTransmit().....  | 15        |
| 2.1.1.2  | Deviation API: CanIf_CheckWakeup .....      | 15        |
| 2.1.1.3  | Deviation API: CanIf_RxIndication() .....   | 16        |
| 2.1.2    | Additions/ Extensions .....                 | 17        |
| 2.2      | Initialization .....                        | 18        |
| 2.3      | Communication Modes .....                   | 19        |
| 2.3.1    | Controller Mode .....                       | 19        |
| 2.3.2    | PDU Mode .....                              | 20        |
| 2.4      | Main Functions .....                        | 21        |
| 2.5      | Transmission.....                           | 21        |
| 2.5.1    | Tx-PDU truncation.....                      | 21        |
| 2.5.2    | Dynamic transmission .....                  | 22        |
| 2.5.3    | Transmit-buffer .....                       | 22        |
| 2.5.3.1  | FIFO .....                                  | 22        |
| 2.5.3.2  | Prioritization by CAN-identifier .....      | 23        |
| 2.5.3.3  | Multiple Transmit-buffers.....              | 24        |
| 2.5.4    | Tx confirmation polling support.....        | 24        |
| 2.5.5    | Data checksum Tx .....                      | 25        |
| 2.6      | Reception.....                              | 25        |
| 2.6.1    | Ranges .....                                | 26        |
| 2.6.2    | DLC check .....                             | 28        |
| 2.6.3    | Data checksum Rx.....                       | 28        |
| 2.6.4    | Control of reception mode of a Rx-PDU ..... | 29        |
| 2.7      | Polling.....                                | 29        |
| 2.8      | CAN FD .....                                | 30        |
| 2.9      | Meta data Rx- / Tx-support.....             | 30        |
| 2.10     | J1939 dynamic address support .....         | 30        |
| 2.11     | CAN transceiver handling .....              | 31        |
| 2.12     | Sleep / Wakeup.....                         | 32        |
| 2.13     | Bus Off.....                                | 34        |
| 2.14     | Version Info.....                           | 35        |
| 2.15     | Partial Networking.....                     | 36        |
| 2.16     | Bus Mirroring .....                         | 37        |

|          |  |           |
|----------|--|-----------|
| 2.17     | Security event reporting .....               | 38        |
| 2.18     | Multiple CAN Drivers.....                    | 39        |
| 2.19     | Extended RAM-check .....                     | 40        |
| 2.20     | Support ASR4.4.0 CAN Driver .....            | 40        |
| 2.21     | Multi-partition .....                        | 40        |
| 2.22     | Error Handling.....                          | 41        |
| 2.22.1   | Development Error Reporting.....             | 41        |
| 2.22.2   | Production Code Error Reporting .....        | 49        |
| <b>3</b> | <b>Integration.....</b>                      | <b>50</b> |
| 3.1      | Embedded Implementation .....                | 50        |
| 3.2      | Critical Sections .....                      | 51        |
| 3.3      | Compiler Abstraction and Memory Mapping..... | 54        |
| <b>4</b> | <b>API Description.....</b>                  | <b>55</b> |
| 4.1      | Services provided by CAN Interface.....      | 55        |
| 4.1.1    | CanIf_InitMemory .....                       | 55        |
| 4.1.2    | CanIf_Init .....                             | 56        |
| 4.1.3    | CanIf_SetControllerMode .....                | 57        |
| 4.1.4    | CanIf_GetControllerMode .....                | 58        |
| 4.1.5    | CanIf_Transmit.....                          | 59        |
| 4.1.6    | CanIf_CancelTransmit.....                    | 60        |
| 4.1.7    | CanIf_SetPduMode.....                        | 61        |
| 4.1.8    | CanIf_GetPduMode .....                       | 62        |
| 4.1.9    | CanIf_GetVersionInfo.....                    | 63        |
| 4.1.10   | CanIf_SetDynamicTxId .....                   | 64        |
| 4.1.11   | CanIf_SetTrcvMode .....                      | 65        |
| 4.1.12   | CanIf_GetTrcvMode .....                      | 66        |
| 4.1.13   | CanIf_GetTrcvWakeupReason.....               | 67        |
| 4.1.14   | CanIf_SetTrcvWakeupMode.....                 | 68        |
| 4.1.15   | CanIf_CheckWakeup .....                      | 69        |
| 4.1.16   | CanIf_CheckValidation .....                  | 70        |
| 4.1.17   | CanIf_GetTxConfirmationState .....           | 71        |
| 4.1.18   | CanIf_ClearTrcvWufFlag .....                 | 72        |
| 4.1.19   | CanIf_CheckTrcvWakeFlag.....                 | 73        |
| 4.1.20   | CanIf_SetBaudrate.....                       | 74        |
| 4.1.21   | CanIf_ChangeBaudrate .....                   | 75        |
| 4.1.22   | CanIf_CheckBaudrate.....                     | 76        |
| 4.1.23   | CanIf_SetAddressTableEntry .....             | 77        |
| 4.1.24   | CanIf_ResetAddressTableEntry .....           | 78        |
| 4.1.25   | CanIf_RamCheckExecute .....                  | 79        |

|          |  |     |
|----------|--|-----|
| 4.1.26   | CanIf_RamCheckEnableMailbox.....           | 80  |
| 4.1.27   | CanIf_RamCheckEnableController .....       | 81  |
| 4.1.28   | CanIf_SetPduReceptionMode .....            | 82  |
| 4.1.29   | CanIf_GetControllerErrorState .....        | 83  |
| 4.1.30   | CanIf_GetControllerRxErrorCounter.....     | 84  |
| 4.1.31   | CanIf_GetControllerTxErrorCounter.....     | 85  |
| 4.1.32   | CanIf_EnableBusMirroring .....             | 86  |
| 4.2      | Services used by CAN Interface .....       | 87  |
| 4.3      | Callback Functions.....                    | 89  |
| 4.3.1    | CanIf_TxConfirmation .....                 | 89  |
| 4.3.2    | CanIf_RxIndication.....                    | 90  |
| 4.3.3    | CanIf_CancelTxConfirmation .....           | 91  |
| 4.3.4    | CanIf_ControllerBusOff .....               | 92  |
| 4.3.5    | CanIf_CancelTxNotification.....            | 93  |
| 4.3.6    | CanIf_TrcvModeIndication.....              | 94  |
| 4.3.7    | CanIf_ControllerModeIndication .....       | 95  |
| 4.3.8    | CanIf_ConfirmPnAvailability .....          | 96  |
| 4.3.9    | CanIf_ClearTrcvWufFlagIndication.....      | 97  |
| 4.3.10   | CanIf_CheckTrcvWakeFlagIndication.....     | 98  |
| 4.3.11   | CanIf_RamCheckCorruptMailbox.....          | 99  |
| 4.3.12   | CanIf_RamCheckCorruptController.....       | 100 |
| 4.3.13   | CanIf_ControllerErrorStatePassive .....    | 101 |
| 4.3.14   | CanIf_ErrorNotification.....               | 102 |
| 4.4      | Configurable Interfaces .....              | 103 |
| 4.4.1    | Notifications .....                        | 103 |
| 4.4.1.1  | <User_RxIndication> (Simple Layout).....   | 103 |
| 4.4.1.2  | <User_RxIndication> (Advanced Layout)..... | 104 |
| 4.4.1.3  | <User_RxIndication> (NmOsek Layout).....   | 104 |
| 4.4.1.4  | <User_RxIndication> (Cdd Layout) .....     | 105 |
| 4.4.1.5  | <User_TxConfirmation> .....                | 105 |
| 4.4.1.6  | <User_ControllerBusOff> .....              | 106 |
| 4.4.1.7  | <User_ControllerModeIndication>.....       | 106 |
| 4.4.1.8  | <User_TrcvModeIndication> .....            | 107 |
| 4.4.1.9  | <User_ConfirmPnAvailability >.....         | 107 |
| 4.4.1.10 | <User_ClearTrcvWufFlagIndication> .....    | 108 |
| 4.4.1.11 | <User_CheckTrcvWakeFlagIndication> .....   | 108 |
| 4.4.1.12 | <User_ValidateWakeupEvent> .....           | 109 |
| 4.4.1.13 | <User_RamCheckCorruptMailbox> .....        | 109 |
| 4.4.1.14 | <User_RamCheckCorruptController> .....     | 110 |
| 4.4.1.15 | <User_DataChecksumRxErrFct>.....           | 110 |
| 4.4.2    | Callout Functions .....                    | 111 |



|          |   |            |
|----------|---|------------|
| 4.4.2.1  | CanIf_RxIndicationSubDataChecksumRxVerify ..... | 111        |
| 4.4.2.2  | CanIf_TransmitSubDataChecksumTxAppend .....     | 112        |
| <b>5</b> | <b>Configuration.....</b>                       | <b>113</b> |
| 5.1      | Configuration Variants.....                     | 113        |
| <b>6</b> | <b>Glossary and Abbreviations .....</b>         | <b>114</b> |
| 6.1      | Glossary .....                                  | 114        |
| 6.2      | Abbreviations .....                             | 114        |
| <b>7</b> | <b>Contact.....</b>                             | <b>116</b> |

## Illustrations

|            |   |    |
|------------|---|----|
| Figure 1-1 | Interfaces to adjacent modules of the CAN Interface ..... | 12 |
| Figure 2-1 | Configuration of multiple Transmit-buffers.....           | 24 |
| Figure 2-2 | Wakeup sequence (No validation) .....                     | 33 |
| Figure 2-3 | Wakeup sequence (Wakeup validation) .....                 | 34 |

## Tables

|            |  |    |
|------------|--|----|
| Table 2-1  | Supported AUTOSAR standard conform features .....  | 14 |
| Table 2-2  | Not supported AUTOSAR standard conform features .....  | 15 |
| Table 2-3  | Features provided beyond the AUTOSAR standard .....  | 17 |
| Table 2-4  | Priority order of BasicCAN Rx-PDUs .....   | 27 |
| Table 2-5  | Sub-features of feature Partial Networking.....  | 36 |
| Table 2-6  | Security events with their context data .....  | 38 |
| Table 2-7  | Adapted CAN Driver APIs (* optional) .....   | 39 |
| Table 2-8  | APIs of CAN Interface which have to be used in multiple CAN Driver configurations (* optional) ..... | 39 |
| Table 2-9  | Service IDs .....  | 43 |
| Table 2-10 | Errors reported to DET.....  | 48 |
| Table 3-1  | Implementation files.....  | 51 |
| Table 3-2  | Critical Section Codes .....   | 52 |
| Table 3-3  | Restrictions for the different lock areas .....  | 53 |
| Table 3-4  | Compiler abstraction and memory mapping.....   | 54 |
| Table 4-1  | CanIf_InitMemory .....   | 55 |
| Table 4-2  | CanIf_Init .....   | 56 |
| Table 4-3  | CanIf_SetControllerMode .....  | 57 |
| Table 4-4  | CanIf_GetControllerMode .....  | 58 |
| Table 4-5  | CanIf_Transmit .....   | 59 |
| Table 4-6  | CanIf_CancelTransmit .....   | 60 |
| Table 4-7  | CanIf_SetPduMode .....   | 61 |
| Table 4-8  | CanIf_GetPduMode .....   | 62 |
| Table 4-9  | CanIf_GetVersionInfo .....   | 63 |
| Table 4-10 | CanIf_SetDynamicTxId .....   | 64 |
| Table 4-11 | CanIf_SetTrcvMode .....  | 65 |
| Table 4-12 | CanIf_GetTrcvMode.....   | 66 |
| Table 4-13 | CanIf_GetTrcvWakeupReason .....  | 67 |
| Table 4-14 | CanIf_SetTrcvWakeupMode .....  | 68 |
| Table 4-15 | CanIf_CheckWakeup .....  | 69 |
| Table 4-16 | CanIf_CheckValidation.....   | 70 |
| Table 4-17 | CanIf_GetTxConfirmationState .....   | 71 |
| Table 4-18 | CanIf_ClearTrcvWufFlag.....  | 72 |
| Table 4-19 | CanIf_CheckTrcvWakeFlag .....  | 73 |
| Table 4-20 | CanIf_SetBaudrate .....  | 74 |
| Table 4-21 | CanIf_ChangeBaudrate .....   | 75 |
| Table 4-22 | CanIf_CheckBaudrate .....  | 76 |
| Table 4-23 | CanIf_SetAddressTableEntry .....   | 77 |
| Table 4-24 | CanIf_ResetAddressTableEntry .....   | 78 |
| Table 4-25 | CanIf_RamCheckExecute.....   | 79 |
| Table 4-26 | CanIf_RamCheckEnableMailbox .....  | 80 |
| Table 4-27 | CanIf_RamCheckEnableController .....   | 81 |
| Table 4-28 | CanIf_SetPduReceptionMode.....   | 82 |
| Table 4-29 | CanIf_GetControllerErrorState .....  | 83 |

|            |   |     |
|------------|---|-----|
| Table 4-30 | CanIf_GetControllerRxErrorCounter .....         | 84  |
| Table 4-31 | CanIf_GetControllerTxErrorCounter.....          | 85  |
| Table 4-32 | CanIf_EnableBusMirroring.....                   | 86  |
| Table 4-33 | Services used by the CAN Interface .....        | 88  |
| Table 4-34 | CanIf_TxConfirmation .....                      | 89  |
| Table 4-35 | CanIf_RxIndication .....                        | 90  |
| Table 4-36 | CanIf_CancelTxConfirmation.....                 | 91  |
| Table 4-37 | CanIf_ControllerBusOff.....                     | 92  |
| Table 4-38 | CanIf_CancelTxNotification .....                | 93  |
| Table 4-39 | CanIf_TrcvModeIndication .....                  | 94  |
| Table 4-40 | CanIf_ControllerModeIndication.....             | 95  |
| Table 4-41 | CanIf_ConfirmPnAvailability.....                | 96  |
| Table 4-42 | CanIf_ClearTrcvWufFlagIndication .....          | 97  |
| Table 4-43 | CanIf_CheckTrcvWakeFlagIndication .....         | 98  |
| Table 4-44 | CanIf_RamCheckCorruptMailbox .....              | 99  |
| Table 4-45 | CanIf_RamCheckCorruptController .....           | 100 |
| Table 4-46 | CanIf_ControllerErrorStatePassive .....         | 101 |
| Table 4-47 | CanIf_ErrorNotification .....                   | 102 |
| Table 4-48 | <User_RxIndication> (Simple Layout).....        | 103 |
| Table 4-49 | <User_RxIndication> (Advanced Layout).....      | 104 |
| Table 4-50 | <User_RxIndication> (NmOsek Layout).....        | 104 |
| Table 4-51 | <User_RxIndication> (Cdd Layout).....           | 105 |
| Table 4-52 | <User_TxConfirmation>.....                      | 105 |
| Table 4-53 | <User_ControllerBusOff>.....                    | 106 |
| Table 4-54 | <User_ControllerModeIndication> .....           | 106 |
| Table 4-55 | <User_TrcvModeIndication> .....                 | 107 |
| Table 4-56 | <User_ConfirmPnAvailability > .....             | 107 |
| Table 4-57 | <User_ClearTrcvWufFlagIndication> .....         | 108 |
| Table 4-58 | <User_CheckTrcvWakeFlagIndication> .....        | 108 |
| Table 4-59 | <User_ValidateWakeupEvent> .....                | 109 |
| Table 4-60 | <User_RamCheckCorruptMailbox> .....             | 109 |
| Table 4-61 | <User_RamCheckCorruptController> .....          | 110 |
| Table 4-62 | <User_DataChecksumRxErrFct>.....                | 110 |
| Table 4-63 | CanIf_RxIndicationSubDataChecksumRxVerify ..... | 111 |
| Table 4-64 | CanIf_TransmitSubDataChecksumTxAppend .....     | 112 |
| Table 6-1  | Glossary .....                                  | 114 |
| Table 6-2  | Abbreviations.....                              | 115 |

# 1 Introduction

This document describes the functionality, API and configuration of the AUTOSAR BSW module CAN Interface as specified in [1].

|  |                         |   |
|--|-------------------------|---|
| <b>Supported Configuration Variants:</b> | Pre-compile, Post-build |   |
| <b>Vendor ID:</b>                        | CANIF_VENDOR_ID         | 30 decimal<br>(= Vector-Informatik, according to HIS) |
| <b>Module ID:</b>                        | CANIF_MODULE_ID         | 60 decimal<br>(according to ref. [3])                 |

The CAN Interface is a hardware independent layer with a standardized interface to the CAN Driver and CAN Transceiver Driver layer and upper layers like PDU Router, Communication Manager and the Network Management. All upper layers which require CAN communication have to communicate with the CAN Interface which is responsible for the CAN communication handling. This includes the transmission and the reception of messages and the state handling of the CAN controllers as well.

## 1.1 Architecture Overview

The next figure shows the interfaces to adjacent modules of the CAN Interface. These interfaces are described in chapter 4.

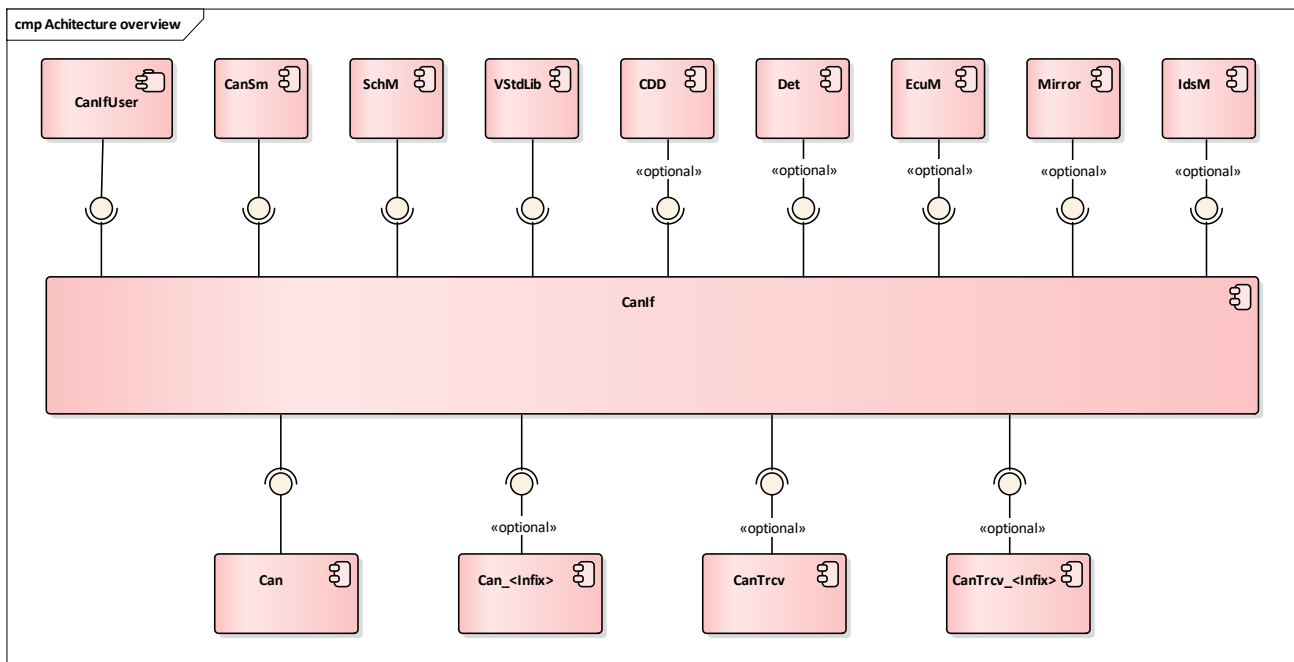


Figure 1-1 Interfaces to adjacent modules of the CAN Interface

The modules which are informed by the CAN Interface about a successfully transmission or reception of PDUs are abstracted by the module `CanIfUser`. These modules are listed in Table 4-33 with the APIs `<Msn>_RxIndication`, `User_RxIndication`, `<Msn>_TxConfirmation` or `User_TxConfirmation`.

## 2 Functional Description

### 2.1 Features

The features listed in the following tables cover the functionality specified for the CAN Interface.

The AUTOSAR standard functionality is specified in [1], the corresponding features are listed in the tables

- > Table 2-1 Supported AUTOSAR standard conform features
- > Table 2-2 Not supported AUTOSAR standard conform features

Vector Informatik provides further CAN Interface functionality beyond the AUTOSAR standard. The corresponding features are listed in the table

- > Table 2-3 Features provided beyond the AUTOSAR standard

The following features specified in [1] are supported:

| Supported AUTOSAR Standard Conform Features  |
|--|
| CAN Interface initialization   |
| Transmission incl. Transmit confirmation   |
| Transmit buffer (Prioritization by CAN-identifier)<br><i>Buffering (send request and data) of Tx-PDUs mapped to a Tx-buffer in the CAN Interface prioritized by CAN-identifier.</i>  |
| Reception incl. Receive indication   |
| DLC check<br><i>Check DLC of received Rx-PDUs against predefined values.</i>   |
| CAN FD support   |
| Meta data Rx- / Tx-support<br><i>Support for dynamic CAN identifier handling by using of SDU meta data.</i>  |
| Communication Modes<br><i>Modes for CAN controllers and PDUs.</i>  |
| BusOff detection<br><i>Handling of bus off notifications.</i>  |
| External wakeup (CAN)<br><i>Support external wakeup by CAN Driver.</i>   |
| External wakeup (Transceiver)<br><i>Support external wakeup by CAN Transceiver Driver.</i>   |
| Wakeup validation<br><i>Support wakeup validation for external wakeup events.</i>  |
| Error notification with Default Error Tracer (DET)   |
| Tx BasicCAN / Tx FullCAN / Rx BasicCAN / Rx FullCAN<br><i>Basic: Standard mailbox to send/ receive CAN frames.</i><br><i>Full: Separate mailbox for special Tx/ Rx message used.</i> |

| Supported AUTOSAR Standard Conform Features  |
|--|
| CAN transceiver handling<br><i>APIs for upper layers to set and read transceiver states; Interface to the CAN Transceiver Driver.</i>  |
| Version API<br><i>API to read out component version.</i>   |
| Supported ID types (Standard Identifiers, Extended Identifiers, Mixed Identifiers)<br><i>Support of CAN Standard (11 bits) identifiers or CAN Extended (29 bits) identifiers or both.</i>            |
| Multiple CAN networks<br><i>Each CAN network has to be connected to exactly one controller.</i>  |
| Multiple CAN Driver support  |
| Tx Confirmation Polling Support<br><i>This service provides the information on whether any Tx confirmation has occurred for a CAN controller since the last start of that CAN controller at all.</i> |
| Post-build loadable<br><i>Post-build loadable allows the re-configuration of an ECU at Post-build time.</i>  |

Table 2-1 Supported AUTOSAR standard conform features

### 2.1.1 Deviations

The following features specified in [1] are not supported or supported with deviations:

| Category   | Description  |
|------------|--|
| Functional | Dynamic transmit L-PDU handles<br><i>The priority of a dynamic Tx-PDU is determined from the initial configured CAN identifier and not from the CAN identifier set by using the API <code>CanIf_SetDynamicTxId()</code></i>                    |
| Functional | Partial Networking<br><i>The Partial Networking Wakeup Tx-PDU Filter is enabled only if the PDU mode of CAN Interface is set either to mode <code>CANIF_GET_TX_ONLINE_WU_FILTER</code> or to mode <code>CANIF_GET_ONLINE_WU_FILTER</code>.</i> |
| Functional | Version check<br><i>The CAN Interface does not perform AUTOSAR release version check in accordance with other modules because the version check is not specified by AUTOSAR clearly.</i>   |
| Functional | Read Tx/Rx notification status   |
| Functional | Read received data   |
| Functional | Transmit cancellation<br><i>Still supported by the CAN Interface. If your CAN Driver does not support this feature, please disable the configuration parameter <code>CanIfCtrlDrvCfg/CanIfCtrlDrvTxCancellation</code>.</i>                    |
| Functional | Trigger transmit   |
| Functional | Pretended Networking   |
| API        | <code>CanIf_CancelTransmit</code><br><i>See chapter 2.1.1.1</i>  |

| Category | Description   |
|----------|---|
| API      | CanIf_CheckWakeup<br><i>See chapter 2.1.1.2</i>   |
| API      | CanIf_RxIndication<br><i>See chapter 2.1.1.3</i>  |
| Config   | CanIfBufferSize<br><i>Only one PDU instance of each Tx-PDU which is assigned to a Transmit buffer (Prioritization by CAN-identifier) can be buffered. The parameter is set automatically by Davinci Configurator 5.</i> |

Table 2-2 Not supported AUTOSAR standard conform features

### 2.1.1.1 Deviation API: CanIf\_CancelTransmit()

The `CanIf_CancelTransmit()` API contains the functionality to cancel an ordered Tx-PDU and suppress its confirmation to the upper layer. The CAN interface expects the API `Can_CancelTx()` to be provided by the underlying CAN Driver. If your CAN Driver does not provide this API then please ensure that the configuration parameter

`CanIfPublicCfg/CanIfPublicCancelTransmitSupport` is disabled in your configuration.

However, if your configuration requires this parameter to be enabled at all but your CAN Driver does not provide this API then please create an empty stub which matches the following signature:

```
► void Can_CancelTx (Can_HwHandleType Hth, PduIdType PduId)
```

and embed it via a user configuration file [Parameter: `CanIfUserConfigFile`].

### 2.1.1.2 Deviation API: CanIf\_CheckWakeup

According to AUTOSAR the API `Can_CheckWakeup()` must have the signature

```
► Can_ReturnType Can_CheckWakeup(uint8 Controller)
```

with the return values `CAN_OK` or `CAN_NOT_OK`.

The CAN Interface supports only the signature

```
► Std_ReturnType Can_CheckWakeup(uint8 Controller)
```

with the return values `E_OK` and `E_NOT_OK`,

if at least one underlying CAN Driver from Vector Informatik has not the BSWMD parameter `CanGeneral/CanCheckWakeupCanRetType`.

**Note**

Please ignore this deviation if all underlying CAN Drivers

- are from Vector Informatik.

or

- are from third party vendors and are implemented according to AUTOSAR specification 4.0.3 - 4.2.2.

In these cases the CAN Drivers and the CAN interface are compatible and there is no malfunction.

If the underlying CAN Drivers are a combination of at least one third party CAN Driver and of at least one Vector Informatik CAN Driver, which has not the BSWMD parameter `CanGeneral/CanCheckWakeupCanRetType` you will not have any malfunction, if:

1. the third party CAN Drivers have the `Can_CheckWakeup()` API signature `Std_ReturnType Can_CheckWakeup(uint8 Controller).`

or

2. the return values `CAN_OK` and `E_OK` from the third party CAN Drivers are equal.

or

3. you do not evaluate the return value of API `CanIf_CheckWakeup()` in your application at all

- ▶ If one of the three above described cases applies, you have to set the BSWMD parameter `CanIfPrivateCfg/CanIfCheckWakeupCanRetType` to `User Defined`, keep the value `false` and ignore the warning.

### 2.1.1.3 Deviation API: `CanIf_RxIndication()`

The prototype of `CanIf_RxIndication()` was changed in AUTOSAR 4.2.2.

In case of you are using a CAN Driver which is implemented according to AUTOSAR specification

as of 4.2.2:

- ▶ Please set the configuration parameter `CanIfCtrlDrvCfg/CanIfRxIndicationPrototype` to `CANIF_RX_IND_ASR422`.

before 4.2.2:

- ▶ Default configuration. You do not have to take care about the configuration parameter `CanIfCtrlDrvCfg/CanIfRxIndicationPrototype`.



## 2.1.2 Additions/ Extensions

The following features are provided beyond the AUTOSAR standard:

| Features Provided Beyond The AUTOSAR Standard |  |
|---|--|
| Transmit-buffer handling type FIFO            | <i>Buffering (send request and data) of Tx-PDUs mapped to a Tx-buffer in the CAN Interface in the requested order.</i>   |
| Multiple transmit-buffers per CAN controller  | <i>Per CAN controller multiple independent transmit-buffers may be configured with different handling types: FIFO or prioritization by CAN identifier.</i>   |
| Control of reception mode of a Rx-PDU         | <i>This feature provides the ability to control the reception mode of a Rx-PDU individually at runtime.</i>  |
| J1939 Dynamic Address Support                 | <i>Translating of addresses according to J1939 by using of dynamic address lookup tables which are maintained by J1939Nm.</i>  |
| Data checksum Rx                              | <i>Verification of checksum of Rx-PDUs.</i>  |
| Data checksum Tx                              | <i>Appending of checksum to Tx-PDUs.</i>   |
| Internal wakeup                               | <i>Internal wakeup by calling <code>CanIf_SetControllerMode()</code>.</i>  |
| Extended RAM-check                            | <i>This service provides the ability in order to request an underlying CAN controller to execute a check of CAN controller HW-registers. The usage of this feature requires a corresponding license.</i> |
| Post-build selectable                         | <i>MICROSAR Classic identity manager using Post-build selectable.</i>  |
| Tx-PDU truncation                             | <i>Ability to truncate the Tx-PDU length, if it exceeds the configured length (according to AUTOSAR standard 4.4.0)</i>  |
| Bus Mirroring                                 | <i>Reports transmitted and received PDUs to the Bus Mirroring module (based on AUTOSAR standard 4.4.0 with deviations as described in chapter 2.16).</i>   |
| Security event reporting                      | <i>Reports occurred security events at a CAN controller to the Intrusion Detection System Manager module (based on AUTOSAR standard 20-11).</i>  |
| Support ASR4.4.0 CAN Driver                   | <i>Supports CAN Drivers according to "AUTOSAR Specification of CAN Driver Release 4.4.0" from 3rd party vendors.</i>   |
| Multi-partition                               | <i>CAN controllers can be mapped to different partitions.</i>  |

Table 2-3 Features provided beyond the AUTOSAR standard

## 2.2 Initialization

Several functions are available to initialize the CAN Interface. The following code example shows which functions have to be called to initialize the CAN Interface and to allow transmission and reception.

```
CanIf_InitMemory();  
    /* Mandatory call which reinitializes global variables to  
       set the CAN Interface back to uninitialized  
       state. */  
  
CanTrcv_xxx_InitMemory() and CanTrcv_xxx_Init()  
    /* have to be called to initialize the CAN Transceiver Driver  
       and set the CAN Transceiver to the preconfigured  
       state. For some CAN Controllers it is necessary  
       to have a recessive signal on the Rx Pin to be  
       able to initialize the CAN Controller. This  
       means the CAN transceiver has to be set to  
       "normal mode" before CanIf_Init() is called. */  
  
Can_InitMemory() and Can_Init();  
    /* have to be called before CanIf_Init is called. */  
  
CanIf_Init(<PtrToCanIfConfiguration>);  
    /* Global initialization of the CAN Interface: all available CAN  
       Interface controllers are initialized within  
       this call. If postbuild-selectable configuration  
       is active a valid configuration has to be passed  
       to CanIf_Init. In other cases the parameter is  
       ignored and a NULL pointer can be used */  
  
CanIf_SetControllerMode(0, CANIF_CS_STARTED);  
    /* The controller mode of CAN controller 0 is set to started  
       mode. This means the CAN controller is  
       initialized and ready to communicate  
       (acknowledge of the CAN controller is  
       activated). Communication is not yet possible  
       because the CAN Interface will neither pass Tx  
       PDUs from higher layers to the CAN Driver nor  
       accept Rx PDUs from the CAN Driver. */
```

```
CanIf_SetPduMode(0, CANIF_SET_ONLINE);
```

```
/* The PDU mode in the CAN Interface of the CAN controller 0 is
   switched to online mode. After initialization
   this mode remains in the state CANIF_GET_OFFLINE
   until the CanIf_SetPduMode function is called.
   Now transmission requests will be passed from
   the upper layer to the CAN Driver and Rx PDUs
   are forwarded from the CAN Driver to the
   corresponding higher layer. */
```

During the CAN Interface initialization with `CanIf_Init()` the `EcuM_BswErrorHook()` is called and the initialization will be aborted when at least one of the following errors occurs:

- ▶ Pointer to the configuration is invalid (`ECUM_BSWERROR_NULLPTR`)
- ▶ Generator is not compatible (`ECUM_BSWERROR_COMPATIBILITYVERSION`)
- ▶ Magic number is wrong (`ECUM_BSWERROR_MAGICNUMBER`)

## 2.3 Communication Modes

The CAN Interface knows two main types of communication modes.

### 2.3.1 Controller Mode

The controller mode represents the physical state of the CAN controller. The following modes are available:

- ▶ `CANIF_CS_STOPPED`
- ▶ `CANIF_CS_STARTED`
- ▶ `CANIF_CS_SLEEP`
- ▶ `CANIF_CS_UNINIT`

There is no mode called bus off. Bus off is treated as a transition from `STARTED` to `STOPPED` mode. All transitions have to be initiated using the API function `CanIf_SetControllerMode()`. The controller mode can be switched for each controller independent of the mode of other controllers in the system.

The mode `CANIF_CS_UNINIT` is the default mode after power on. It is left to mode `CANIF_CS_STOPPED` after `CanIf_Init()` is called and can only be entered again by a reset of the ECU.

The modes `CANIF_CS_SLEEP` and `CANIF_CS_STARTED` can only be entered from `CANIF_CS_STOPPED`. This means a transition from `STARTED` to `SLEEP` and vice versa is not possible without requesting the `STOPPED` mode first.

It is always possible to request the current active controller mode by calling the API `CanIf_GetControllerMode()`.

### 2.3.2 PDU Mode

The other type of communication mode is completely processed by software (it does not represent any state of the hardware). Transitions of the PDU mode are only possible if the controller mode is set to `CANIF_CS_STARTED`.

The following PDU modes are available:

▶ `CANIF_GET_OFFLINE`

Rx and Tx path are switched offline

▶ `CANIF_GET_RX_ONLINE`

Rx path online, Tx path offline

▶ `CANIF_GET_TX_ONLINE`

Rx path offline, Tx path online

▶ `CANIF_GET_ONLINE`

Rx and Tx path are switched online

▶ `CANIF_GET_OFFLINE_ACTIVE`

Rx and Tx path offline, confirmation is emulated by the CAN Interface

▶ `CANIF_GET_OFFLINE_ACTIVE_RX_ONLINE`

Rx path online, Tx path offline, confirmation is emulated by the CAN Interface

If parameter `CanIfPnWakeupTxPduFilterSupport` (s. chapter 2.15) is enabled then the following two further modes are available:

- `CANIF_GET_TX_ONLINE_WAKF`

Rx path offline, tx path online

- `CANIF_GET_ONLINE_WAKF`

Rx and Tx path are switched online

The difference to the modes `CANIF_GET_ONLINE` and `CANIF_GET_TX_ONLINE` is that the Tx-PDU filter is activated if the PDU mode is changed to one of these two modes. (s. chapter 2.15).



#### Caution

If one of the modes `CANIF_GET_TX_ONLINE_WAKF` or `CANIF_GET_ONLINE_WAKF` is left by calling of `CanIf_SetPduMode()` with parameter `PduModeRequest` which equals `CANIF_SET_OFFLINE` or `CANIF_SET_TX_OFFLINE` or `CANIF_SET_TX_OFFLINE_ACTIVE` or `CANIF_SET_ONLINE` or `CANIF_SET_TX_ONLINE` then the Tx-PDU Filter is **deactivated!**

The PDU modes can be set via the function `CanIf_SetPduMode()` and can be retrieved via the function `CanIf_GetPduMode()`.

## 2.4 Main Functions

The CAN Interface does not provide any main functions.

## 2.5 Transmission

The transmission of PDUs is only possible after the CAN Interface and CAN Driver are initialized and the CAN Interface resides in the `CANIF_CS_STARTED` / `CANIF_GET_ONLINE` or `CANIF_CS_STARTED` / `CANIF_GET_TX_ONLINE` mode. In all other states the Tx requests are rejected by the CAN Interface.

The Tx request has to be initiated by a call to the function:

```
CanIf_Transmit(<TxPduId>, <PduInfoPtr>);
```

The CAN Interface uses the PDU ID (<TxPduId>) to acquire more information from the generated data to be able to transmit the message. This data is used to call the function `Can_Write` of the CAN Driver which needs information about the PDU like the CAN identifier, length of data, data by itself and the hardware transmit handle which represents the mailbox used for transmission of the PDU.

After a successful transmission of the message on the bus a confirmation function is called by the CAN Driver either from interrupt context or in case of Tx polling from task context. This confirmation is dispatched in the CAN Interface to notify the corresponding higher layer about the transmission of the PDU. For this purpose for each PDU a call back function has to be specified at configuration time.

The transmission request is rejected by returning `E_NOT_OK` in the following cases:

- The CAN Interface is not in the controller state `CANIF_CS_STARTED`
- The CAN Interface is not in the PDU mode `CANIF_GET_ONLINE` or `CANIF_GET_TX_ONLINE`
- The length of a PDU that shall be transmitted exceeds the configured length and the feature Tx-PDU truncation is disabled for the affected PDU ID.
- The transmit buffer is not active and the corresponding mailbox used for transmission is occupied (BasicCAN Tx messages only).
- An error occurred during transmission (DET will be informed)

### 2.5.1 Tx-PDU truncation

The feature Tx-PDU truncation can be configured for each Tx-PDU individually via the parameter `CanIfTxPduTruncation` and can be reconfigured in the Post-build-loadable configuration phase.

If the feature is enabled and the length of a PDU that shall be transmitted exceeds the configured length of the PDU referenced by the PDU ID, the PDU length will be truncated to the configured length.

If the feature is disabled and the length of a PDU that shall be transmitted exceeds the configured length of the PDU referenced by the PDU ID, the transmission request will be rejected. Additionally the runtime error `CANIF_E_TXPDU_LENGTH_EXCEEDED` is reported.

### 2.5.2 Dynamic transmission

The feature is activated by the parameter “Dynamic Tx Objects”.

The adjustments for the dynamic objects are the same as for the static with the exception that the CAN ID and the attribute whether extended or standard CAN ID can be selected manually.

By default the dynamic object has the CAN ID parameterized during configuration time until it is changed by the call of the API `CanIf_SetDynamicTxId()`. In order to set an extended CAN ID the most significant bit of its value passed to the API shall be set.

The PDU IDs of the dynamic objects are represented as symbolic handles in the file `CanIf_Cfg.h`.

### 2.5.3 Transmit-buffer

The CAN Interface provides a mechanism to buffer Tx-PDUs (including data) which are mapped to a Tx-buffer. This means if the Tx-hardware-object of such Tx-PDU is occupied the Tx-PDU-instance is stored within the CAN Interface until the Tx-hardware-object becomes free.

Two handling types of a transmit-buffer are supported:

1. FIFO
2. Prioritization by CAN-identifier

The handling type defines in which manner the Tx-PDUs stored within the Tx-buffer are transmitted in case of the underlying Tx-hardware-object becomes free. At all the Tx-PDUs stored within a Tx-buffer are processed either in context of the Tx-confirmation interrupt or in context of CAN Driver's Tx-main-function in case of polling mode.

The configuration of multiple transmit-buffers is described in chapter 2.5.3.3.

#### 2.5.3.1 FIFO

The stored Tx-PDUs are transmitted in manner First-In-First-Out. Each Tx-PDU-instance is stored. If the FIFO is full then NO Tx-PDUs are stored until the FIFO becomes free.



#### Caution

If the CAN Driver rejects a transmission request from the CAN Interface for a Tx-PDU out of a FIFO (`Can_Write()` API returns with `CAN_NOT_OK`) or does not confirm a transmitted Tx-PDU from a FIFO to the CAN Interface (`CanIf_TxConfirmation()` API is not called), it is no longer possible to transmit new Tx-PDUs and already buffered Tx-PDUs which belong to the affected FIFO.

The failed transmission out of the Tx-Buffer is signaled by the error code `CANIF_E_TX_BUFFER_TRANSMIT`, if development error reporting is enabled. Additionally the rejection from the CAN Driver can be detected, if the `Can_Write()` API reports a DET.

This situation can be solved by restarting the respective CAN controller (mode transition from STARTED to STOPPED and again to STARTED), which clears all Tx-PDUs from the FIFO.

**Caution**

In case of transmit-buffer of handling type FIFO only one instance of a Tx-PDU (the last one stored within the FIFO) can be and is cancelled from the FIFO via usage of API `CanIf_CancelTransmit!` (Feature: “Cancellation of Tx-PDUs”, see chapter 4.1.6).

### 2.5.3.2 Prioritization by CAN-identifier

The stored Tx-PDUs are transmitted in manner: Tx-PDU with high priority is sent before those one with lower priority. The priority is given by the CAN-identifier of the Tx-PDU. A Tx-PDU with a low CAN-identifier has higher priority than a one with greater CAN-identifier. The priority of a Tx-PDU is static and is determined from values of parameters `CanIfTxPduCanId` and `CanIfTxPduCanIdType`. Please consider this aspect in case of configuration of Tx-PDUs with dynamic CAN-identifier. Only one instance of each Tx-PDU is stored within such Tx-buffer: If a Tx-PDU is requested to be transmitted and the Tx-buffer of this Tx-PDU is already in use the already stored data of this Tx-PDU is overwritten in order to ensure the transmission of most newest data.

This handling type can be used to avoid inner priority inversion. This means if the CAN Interface passes a transmit request to the CAN Driver while all Tx-hardware-objects are occupied and at least one hardware object is occupied by a CAN message with lower priority than the message used for the current transmit request the CAN Driver initiates the cancellation of the message with the lowest priority. The cancelled CAN-message is stored in the Tx-buffer of the CAN Interface if the corresponding Tx-buffer is free. Otherwise it is discarded to ensure the transmission of most newest data. By this way a Tx-hardware message object becomes free and allows the CAN Interface to pass the CAN-message with the highest priority to the CAN Driver.

**Caution**

The described: “inner priority inversion” is only supported if at most only one Tx-buffer of handling type: Prioritization by CAN-identifier is configured per CAN controller!

### 2.5.3.3 Multiple Transmit-buffers

This feature can only be used if the underlying CAN Driver supports the feature “Multiple Tx-BasicCAN hardware objects”. The Figure 2-1 shows the objects which are needed to be configured within the EcuC-configuration and the relationship among themselves. For each Transmit-buffer a triple of objects: `CanHardwareObject`, `CanIfHthCfg` and `CanIfBufferCfg` must be configured and linked with each other and to corresponding CAN controller (objects: `CanController` and `CanIfCtrlCfg`).

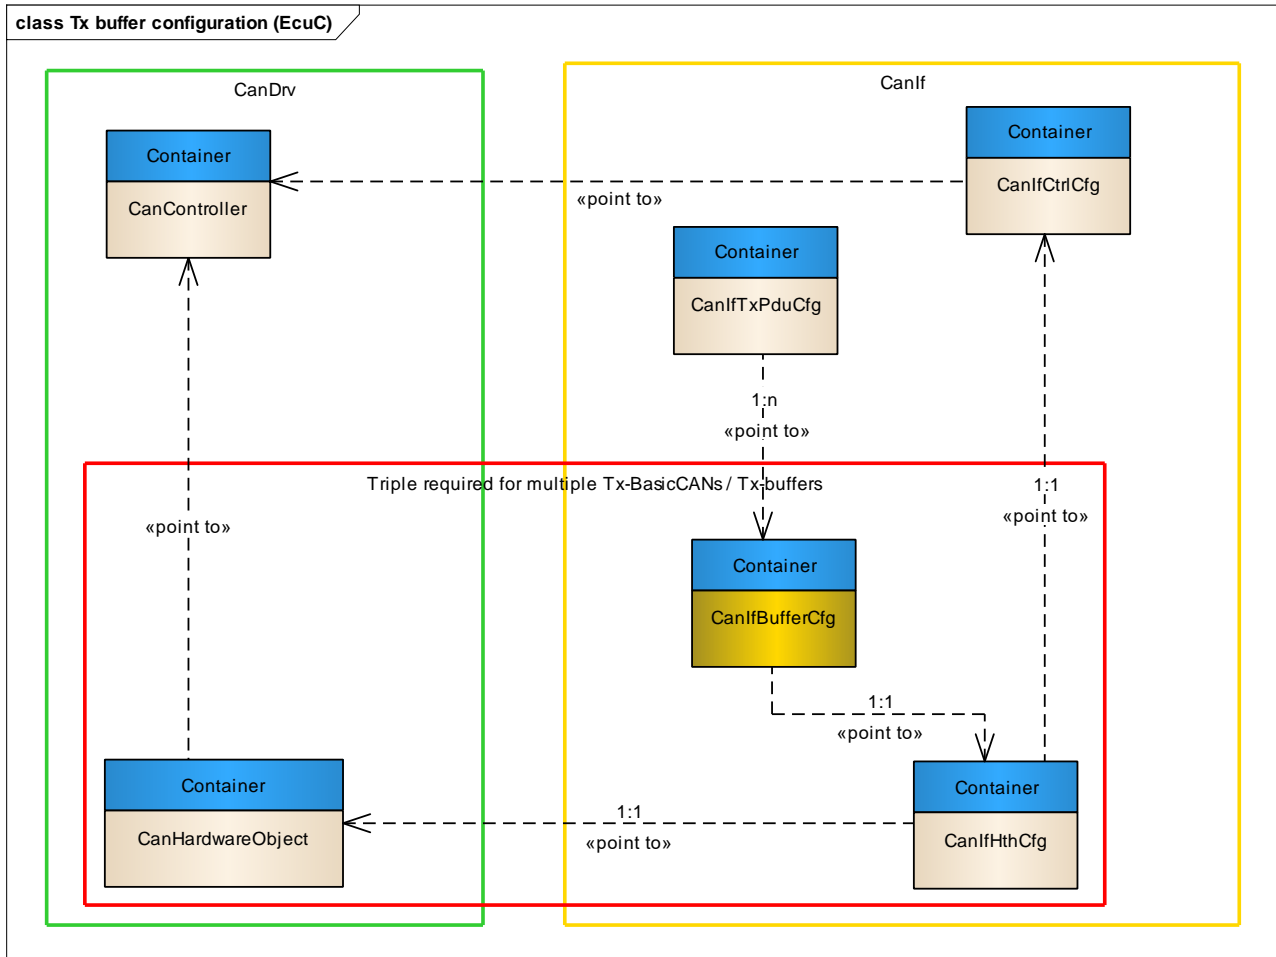


Figure 2-1 Configuration of multiple Transmit-buffers

After this step you can map Tx-PDUs to configured Transmit-buffer (object: `CanIfBufferCfg`). The described handling type of a transmit-buffer (see chapter 2.5.3) can be configured via the parameter `CanIfTxBufferHandlingType`. For further information about configuration of a Transmit-buffer please refer to the help which can be found in the GUI of the DaVinci Configurator 5 and to the descriptions of attributes of container `CanIfBufferCfg`.

### 2.5.4 Tx confirmation polling support

The CAN Interface supports a service which provides the information on whether any Tx confirmation has occurred for a CAN controller since the last start of that CAN controller at all. This feature can be enabled via the parameter

`CanIfPublicTxConfirmPollingSupport`. If enabled the API

`CanIf_GetTxConfirmationState()` is provided and can be used for this service.



### 2.5.5 Data checksum Tx

This feature can be used to append a checksum to data of a Tx-PDU. The configuration of such Tx-PDU can be done individually via the parameter `CanIfTxPduDataChecksumPdu`. The appending of checksum is application specific and must be implemented within the API `CanIf_TransmitSubDataChecksumTxAppend()`. For further information please see the description of the prototype of this API in chapter 4.4.2.2.

For further information about configuration of this feature at all please refer to the help which can be found in the GUI of the DaVinci Configurator 5 and to the description of mentioned parameters.

## 2.6 Reception

Reception of PDUs is only possible in the states

- ▶ `CANIF_CS_STARTED` and `CANIF_GET_ONLINE`

or

- ▶ `CANIF_CS_STARTED` and `CANIF_GET_RX_ONLINE`.

In all other states the PDUs received by the CAN Driver are discarded by the CAN Interface without notification to the upper layers.

The CAN Interface supports reception of Rx-PDUs in FullCAN and BasicCAN mailboxes. The upper layers do not notice any differences between these two reception sources as in both cases a callback function is called which was configured for the specified Rx-PDU in the generation tool.

The upper layer is notified about the PDU ID given by the corresponding upper layer at configuration time, the received data and depending on the used indication function about the length of the received data and the CAN ID.

In case of BasicCAN reception the CAN Interface has to search through a list of all known Rx-PDUs and compare the received CAN ID with the CAN ID in the Rx-PDU list.

The CAN Interface offers three different search algorithms:

- ▶ **Linear search:** The list of all Rx-PDUs is searched from high priority (Low CAN ID) to low priority (High CAN ID). This algorithm is efficient for a small amount of Rx-PDUs.
- ▶ **Double Hash search:** The Rx-PDU is calculated via two special hash functions. The algorithm is very efficient for a high amount of Rx-PDUs and always takes the same time.



#### Note

The Double Hash search algorithm uses the mathematical operation modulo.

- ▶ **Binary search:** The list of Rx-PDUs is split in two equal sized parts and the search is continued recursively on a list of Rx-PDUs which contains half the Rx-PDUs. This search algorithm terminates faster for big amounts of Rx-PDUs than the linear search.

**Caution**

The binary search algorithm cannot be used for mixed CAN ID systems.

### 2.6.1 Ranges

The BasicCAN Rx-PDU can be used to receive groups of CAN messages called ranges. A range can be defined either by an upper and a lower CAN ID or by a mask and a code.

The definition of a range by an upper and a lower CAN ID is performed by the following parameters:

- ▶ `CanIfRxPduCanIdRangeLowerCanId` and
- ▶ `CanIfRxPduCanIdRangeUpperCanId`.

A mask-code-range is defined by the parameters:

- ▶ `CanIfRxPduCanId` (**code**) and
- ▶ `CanIfRxPduCanIdMask` (**mask**).

In case of a mask-code-range each CAN ID which fulfills the following equation pass the range and the reception of the corresponding Rx-PDU is reported to the upper layer.

- ▶  $\langle \text{CAN identifier} \rangle \& \langle \text{mask} \rangle == \langle \text{code} \rangle \& \langle \text{mask} \rangle$

One PDU ID is assigned to all CAN messages which pass the configured range. For each range an indication function can be assigned in the generation tool in order to notify the higher layer about the reception of a CAN message.

A range defined by an upper and a lower CAN ID can be converted into a mask-code-range. Therefore please see the following example.



**Example: How to convert a lower CAN ID and an upper CAN ID into mask and code?**

Lower CAN ID: 0x400

Upper CAN ID: 0x43F

The code is same as the lower CAN ID:

code = 0x400

You need the count which is upper CAN ID – lower CAN ID → 0x43F – 0x400 = 0x3F

The count 0x3F is 000 0011 1111b in 11-bit binary format. For a range with extended CAN IDs the count needs to be 29-bit wide.

The mask is calculated out of negated count and a 11-bit mask:

mask = ~0x3F & 0x7FF = 0x7C0

For extended IDs you need a 29-bit mask:

mask = ~0x3F & 0x1FFF FFFF = 0x1FFF FFC0

**Note:**

If for count the first set bit is followed by unset bits on lower significant positions for the calculation of the mask these bits need to be set. For example a count of 0xA3 (1010 0011b) you need to calculate with the count 0xFF (1111 1111b). The consequence is that more CAN IDs are received as intended.

The CAN Interface applies the following priority order for checking a valid BasicCAN Rx-PDU reception, if BasicCAN Rx-PDUs with a single CAN-Id and BasicCAN Rx-PDUs with a CAN ID range are configured at one CAN controller.

| Priority | BasicCAN Rx-PDU                                    |
|----------|--|
| highest  | Rx-PDU with the lowest single CAN ID <sup>1</sup>  |
|          | ...  |
|          | Rx-PDU with the highest single CAN ID <sup>1</sup> |
|          | Rx-PDU with the smallest CAN ID range              |
|          | ...  |
| lowest   | Rx-PDU with the largest CAN ID range               |

Table 2-4 Priority order of BasicCAN Rx-PDUs

If the CAN ID of an Rx-PDU with a single CAN ID is contained in the CAN ID range of another Rx-PDU, the Rx-PDU with the single CAN ID is always checked first for a valid reception.

If different Rx-PDUs with a CAN-ID range have overlapping CAN-ID ranges, the Rx-PDU with the smaller CAN-ID range is always checked first for valid reception.

<sup>1</sup> The CAN IDs are compared left-justified (incl. a possible EXT-ID bit), as is done in the arbitration.

If there are two Rx-PDUs with the same single CAN ID or with the same CAN ID range at one CAN controller, the Rx-PDU with the CAN ID type “CAN 2.0 frame” is always checked first for a valid reception.

### 2.6.2 DLC check

The DLC check is executed for all received messages after they pass the search algorithm (PDU is in Rx list) or if they are defined to be received in FullCAN message objects. The feature DLC check can be activated only at Pre-compile time at all. If activated the DLC check can be configured for each Rx-PDU individually and can be reconfigured in the Post-build-loadable configuration phase.

The DLC check verifies if the received DLC is greater or equal to the DLC specified during configuration time. If the DLC is less than the configured one a DET error is raised and the reception of the PDU is abandoned.

### 2.6.3 Data checksum Rx

This feature can be used to verify the validity of a Rx-PDU after reception. The Rx-PDU which shall be verified can be configured individually via the parameter `CanIfRxPduDataChecksumPdu`. The verification is application specific and must be implemented within the API `CanIf_RxIndicationSubDataChecksumRxVerify()`. For further information please see the description of the prototype of this API in chapter 4.4.2.1.

In addition an indication function may be configured which signals about invalidity of a Rx-PDU. This indication function can be configured via the parameter `CanIfDispatchDataChecksumRxErrorIndicationName`.

The call of this indication function is application specific too and if required must be invoked within the implementation of `CanIf_RxIndicationSubDataChecksumRxVerify()`.

The prototype of the indication function must match following signature:

```
► void My_DataChecksumRxErrFct (PduIdType CanIfRxPduId)
```

and can be accessed via the macro: `CanIf_GetDataChecksumRxErrFctPtr()` (see file `CanIf_Cfg.h`)

It is recommended to call this indication function with the identifier of affected Rx-PDU. Therefor the value of parameter `CanIfRxPduId` should be used which is passed by call of `CanIf_RxIndicationSubDataChecksumRxVerify()`. The value of this parameter is a CAN interface internal identifier which corresponds to value of configuration parameter `CanIfRxPduId`. Corresponding macros are generated per Rx-PDU into file `CanIf_Cfg.h`. These ones can be used by application (s. example below).

```
/******  
  \def AUTOSAR Rx PDU handles  
*****/  
  
#define CanIfConf_CanIfRxPduCfg_RxRange2_0 0U  
#define CanIfConf_CanIfRxPduCfg_RxRange1_0 1U  
#define CanIfConf_CanIfRxPduCfg_RxMSG00000711_0 2U  
#define CanIfConf_CanIfRxPduCfg_RxMSG95555311_0 3U  
#define CanIfConf_CanIfRxPduCfg_RxMSG00000511_0 4U  
#define CanIfConf_CanIfRxPduCfg_RxMSG91111151_0 5U
```

For further information about configuration of this feature at all please refer to the help which can be found in the GUI of the DaVinci Configurator 5 and to the description of mentioned parameters.

#### 2.6.4 Control of reception mode of a Rx-PDU

This feature provides the ability to control the reception mode of a Rx-PDU at runtime. The reception mode can be set per Rx-PDU individually at runtime via the API: `CanIf_SetPduReceptionMode()`. In order to address a Rx-PDU you can use the corresponding symbolic name value which can be found in file `CanIf_Cfg.h` (s. example below).

```
/******  
  \def AUTOSAR Rx PDU handles  
*****/  
  
#define CanIfConf_CanIfRxPduCfg_RxRange2_0 0U  
#define CanIfConf_CanIfRxPduCfg_RxRange1_0 1U  
#define CanIfConf_CanIfRxPduCfg_RxMSG00000711_0 2U  
#define CanIfConf_CanIfRxPduCfg_RxMSG95555311_0 3U  
#define CanIfConf_CanIfRxPduCfg_RxMSG00000511_0 4U  
#define CanIfConf_CanIfRxPduCfg_RxMSG91111151_0 5U
```

For further information about this API please see chapter 4.1.28. This feature can be used for e.g. either to receive a CAN-message as a Rx-PDU with an explicit CAN-identifier or as a Rx-range-PDU. In case of the configured CAN-identifier of a Rx-PDU fits the range of CAN-identifiers of a Rx-range-PDU on the same CAN controller as well. In case of a FullCAN-Rx-PDU the reception can be controlled at runtime at all.

This feature can be enabled via the parameter `CanIfSetPduReceptionModeSupport`. In addition Rx-PDUs whose reception mode is intended to be controlled at runtime must be configured accordingly via the parameter `CanIfRxPduSetReceptionModePdu`.

For further information about configuration of this feature at all please refer to the help which can be found in the GUI of the DaVinci Configurator 5 and to the description of mentioned parameters.

## 2.7 Polling

The CAN Interface can process events in polling and interrupt mode. As the polling of events is executed by other layers (e.g. CAN Driver, CAN Transceiver Driver) the CAN Interface is notified by call back functions which are called in the corresponding context.



### Note

There is no need for changes in the configuration to run the CAN Interface in polling mode.

## 2.8 CAN FD

The CAN Interface supports CAN FD. The configuration can be performed both for Rx- and Tx-PDUs. Therefore please configure the attribute `CanIfRxPduCanIdType` (Rx-PDU) and `CanIfTxPduCanIdType` (Tx-PDU) accordingly as required by your application. In case of Rx-PDUs the message type (e.g. FD or not-FD) is evaluated during the Rx-search algorithm. Hence it is possible to handle two messages with the same CAN identifier, at which one is configured as FD and one as not-FD and to map them to different Rx-PDUs.



### Expert Knowledge

If you intend to switch the baudrate of the CAN hardware at runtime it is suggested to use the API `CanIf_SetBaudrate` instead of `CanIf_ChangeBaudrate`.

Rx- and Tx-FD-PDUs with up to 64 bytes payload are supported.



### Basic Knowledge

If you intend to configure `BasicCAN-FD-Tx-PDUs` and the Tx-buffer is enabled in your configuration please ensure that attribute `CanIfStaticFdTxBufferSupport` is enabled.

## 2.9 Meta data Rx- / Tx-support

If this feature is enabled the CAN Interface supports the handling of dynamic CAN-identifiers by using of SDU meta data. Such dynamic PDU can be configured by parameter `MetaDataLength`. This parameter can be found in the container of corresponding global PDU. In case of configuration variant Post-build loadable please enable this feature by setting of parameter `CanIfMetaDataSupport` to true. In case of configuration variant Pre-compile the activation/deactivation of this feature is determined from the configuration of Rx- and Tx-PDUs. If there is any PDU which has configured the parameter `MetaDataLength` then this feature is enabled else disabled.

## 2.10 J1939 dynamic address support

If this feature is enabled the CAN Interface translates the addresses (CAN identifiers) of Rx- and Tx-PDUs according to J1939 by using of dynamic address lookup tables. These tables are maintained by J1939Nm by using of following APIs:

- > `CanIf_SetAddressTableEntry` and
- > `CanIf_ResetAddressTableEntry`.

This feature has to be configured for each CAN controller individually by the parameter `CanIfCtrlJ1939DynAddrSupport`. Please consider that in case of configuration variant Post-build loadable and configuration phase Post-build the value which you can select by `CanIfCtrlJ1939DynAddrSupport` is limited by value of `CanIfJ1939DynAddrSupport` which was set at configuration phase Pre-compile.

Therefore in case of configuration variant Post-build loadable please first enable this feature as far as you need at all by the parameter `CanIfJ1939DynAddrSupport` and then configure the controller specific parameter of this feature. In case of configuration variant Pre-compile it is only possible to configure the controller specific parameter.

**Caution**

The feature J1939 dynamic address support works only if all Rx-PDUs of the CAN controller at which this feature is enabled are configured as BasicCANs and if all the corresponding hardware filters are opened completely!

## 2.11 CAN transceiver handling

The CAN Interface provides APIs and call back functions to control as many CAN transceivers as CAN controllers are available in the system. The CAN transceiver handling has to be activated at Pre-compile time.

The CAN Interface provides the following functions for higher layers to control the behavior of the CAN transceiver.

- ▶ `CanIf_SetTrcvMode()`
- ▶ `CanIf_TrcvModeIndication()`
- ▶ `CanIf_GetTrcvMode()`
- ▶ `CanIf_GetTrcvWakeupReason()`
- ▶ `CanIf_SetTrcvWakeupMode()`

Additionally the following APIs are provided in order to control a partial networking CAN transceiver.

- ▶ `CanIf_CheckTrcvWakeFlag()`
- ▶ `CanIf_CheckTrcvWakeFlagIndication()`
- ▶ `CanIf_ClearTrcvWufFlag()`
- ▶ `CanIf_ClearTrcvWufFlagIndication()`
- ▶ `CanIf_ConfirmPnAvailability()`

The initialization of the CAN Transceiver Driver itself is not executed by the CAN Interface. This means the calling layer has to make sure the CAN Transceiver Driver is initialized before using the listed API functions.

If more than one different CAN Transceiver Driver is used in the system the CAN Interface provides a mapping to address the correct CAN Transceiver Driver with the correct parameters. The parameter `CanIfTransceiverMapping` has to be activated to control more than one CAN Transceiver Driver.

It is also allowed to activate the parameter `CanIfTransceiverMapping` if only one CAN Transceiver Driver is used in the system. Because of additional runtime it is suggested to deactivate this feature in this use case.

The CAN Interface supports the detection of wakeup events raised by a CAN transceiver. The feature “Wakeup Support” has to be activated and a wakeup source has to be configured for the corresponding CAN transceiver.

Within the API `CanIf_CheckWakeup()` the CAN Interface analyses the passed wakeup source parameter and decides whether a CAN controller or a CAN transceiver has to be requested for a pending wakeup event.

For more details refer to the chapter 2.12 Sleep / Wakeup.

## 2.12 Sleep / Wakeup

The CAN Interface controls the modes of the underlying CAN Driver and CAN Transceiver Driver.

The API `CanIf_SetControllerMode()` has to be used to change the mode of the CAN controller while the CAN transceiver can be controlled with the API `CanIf_SetTrcvMode()`.

### Caution



The CAN Interface itself does not perform any checks whether the CAN controller and the CAN transceiver are set to sleep consistently and in the correct sequence. It is up to the higher layer to call `CanIf_SetControllerMode()` and `CanIf_SetTrcvMode()` in the correct sequence.

Wakeup events can be raised either by the CAN controller or by the CAN transceiver. In both cases the CAN Interface is not directly informed about state changes. This means the higher layers (normally the EcuM) has to call the API `CanIf_CheckWakeup()` with the wakeup sources configured for CAN transceiver or CAN controller (1).

The CAN Interface decides by analyzing the passed wakeup source whether the CAN controller or the CAN Transceiver Driver has to be checked for a pending wakeup (2 or 2').



The following figure illustrates the described wakeup sequence:

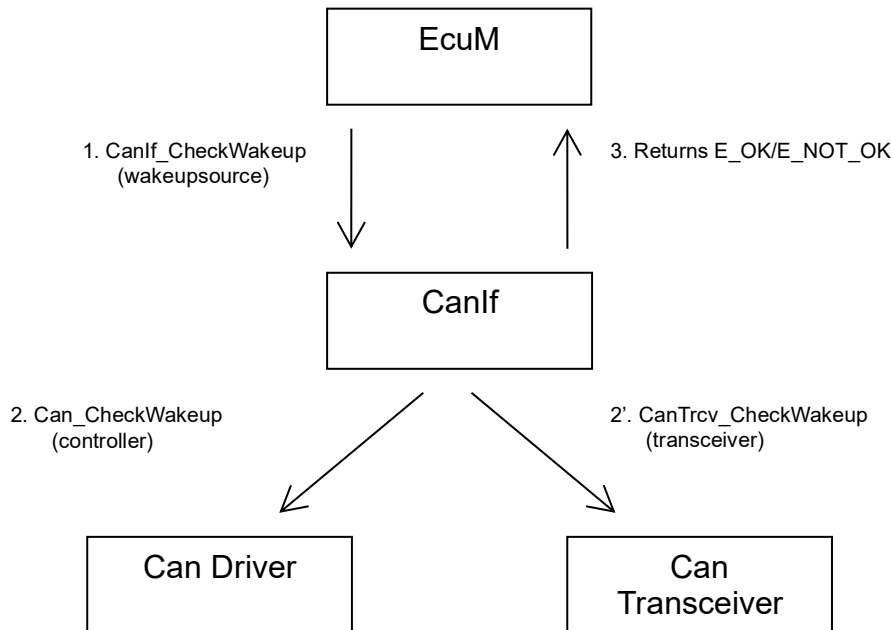


Figure 2-2 Wakeup sequence (No validation)

If the parameter “CanIfPublicWakeupCheckValidSupport” is enabled the following figure shows the sequence which has to be executed for a valid wakeup. Steps 1 to 3 take place as described above.

After the call of `EcuM_SetWakeupEvent()` the CAN Interface has to be set to the state `CANIF_CS_STARTED` to be able to receive messages. These messages won't be passed to upper layers by the CAN Interface because the PDU-mode is still set to `OFFLINE`. The state change which sets the CAN Interface to the mode `STARTED` has to be realized by the call of the API `CanIf_SetControllerMode()` with mode `CANIF_CS_STARTED` (5) from the function `EcuM_StartWakeupSources()` (4). If the wakeup was detected by the CAN transceiver the CAN controller has to be woken up internally. This means the call `CanIf_SetControllerMode()` with mode `CANIF_CS_STOPPED` is necessary in (5) before the transition to mode `STARTED` is executed.

If the wakeup is initiated by the CAN controller the corresponding CAN transceiver has to be set to mode `NORMAL` and the CAN controller has to be set to mode `STARTED`.

If the wakeup is initiated by a CAN transceiver the CAN controller has to be woken up internally. This means an additional call of `CanIf_SetControllerMode()` with mode `CANIF_CS_STOPPED` has to be executed to wakeup the CAN controller before the transition to mode `STARTED` is initiated. (Depending on the behavior of the CAN transceiver the CAN controller and the configuration itself it is possible to wakeup both the CAN controller and the CAN transceiver externally.)

Next the EcuM starts a time out for the wakeup validation. This means if a message is received within this timeout (6) the call of `CanIf_CheckValidation()` executed by the EcuM (7) will result in a successful validation. The CAN Interface checks for a recent Rx event (6) which occurred after the wakeup and notifies the EcuM by calling of `EcuM_ValidationWakeupEvent()`.

If there is no message reception after (5) the function `CanIf_CheckValidation()` has been called no successful wakeup validation won't be notified and the EcuM will run into a timeout. In this case the EcuM calls `EcuM_StopWakeupSources()` (8') and the CAN Driver and CAN transceiver have to be set to mode `SLEEP` again.

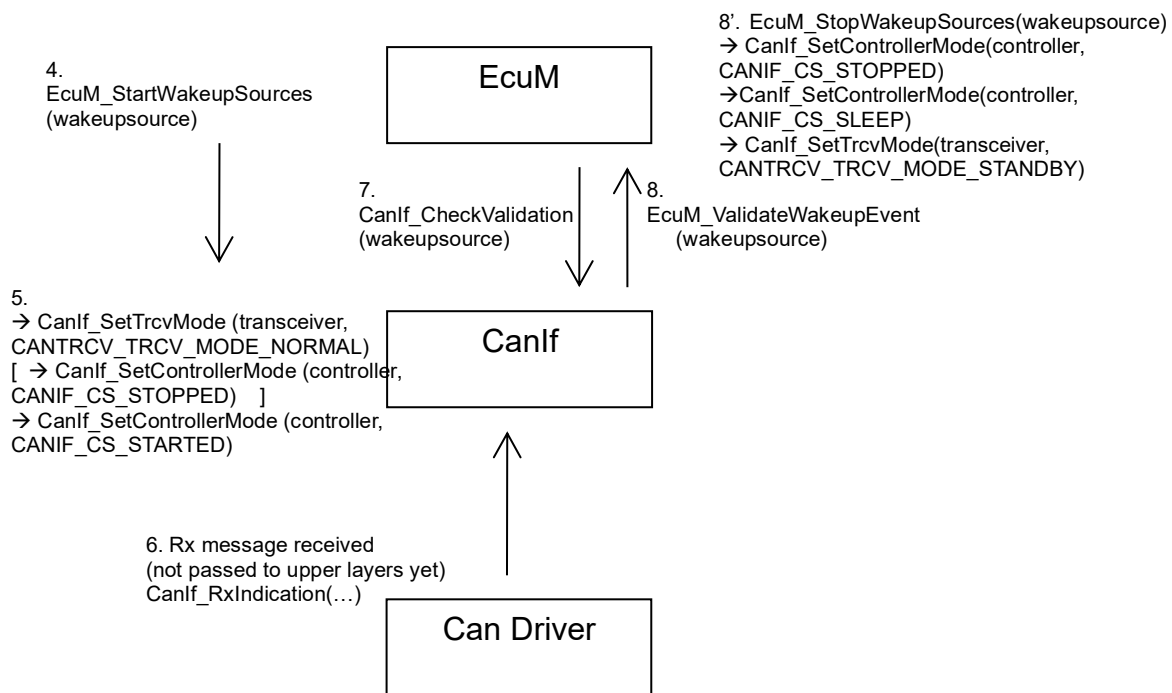


Figure 2-3 Wakeup sequence (Wakeup validation)

During the wakeup sequence as well as during the transition to mode `SLEEP`, the higher layers have to take care about the sequence of the state transitions affecting the CAN controller (CAN Driver) and the CAN Transceiver Driver.

Since ASR4.0R3 it is configurable on whether only a received CanNm-message is able to do the validation.

## 2.13 Bus Off

The CAN Interface handles bus off events notified by the CAN Driver in interrupt driven or polling systems. If a bus off event is raised the CAN Driver forwards it to the CAN Interface by calling the function `CanIf_ControllerBusOff()`.

The CAN Interface switches its internal CAN controller state from `STARTED` to `STOPPED` and the PDU mode is set to `OFFLINE`.

In this state no reception and no transmission is possible until the CAN Interface's controller state and as a result the CAN controller's bus off state is recovered by the call of the function `CanIf_SetControllerMode()` for the affected CAN controller by the higher layer.

After the CAN controller state is switched the bus off state is recovered. For successful reception and transmission the PDU mode has to be switched to `RX_ONLINE`, `TX_ONLINE` or `ONLINE` by the higher layer.

## 2.14 Version Info

The version of the CAN Interface module can be acquired in three different ways. The first possibility is by calling of the function `CanIf_GetVersionInfo()`. This function returns the module's version in the structure `Std_VersionInfoType` which includes the VendorID and the ModuleID additionally.

The second possibility is the access of version defines which are specified in the header file `CanIf.h`.

The following defines can be evaluated to access different versions:

### **AUTOSAR version:**

- ▶ `CANIF_AR_RELEASE_MAJOR_VERSION`
- ▶ `CANIF_AR_RELEASE_MINOR_VERSION`
- ▶ `CANIF_AR_RELEASE_PATCH_VERSION`

### **Module version:**

- ▶ `CANIF_SW_MAJOR_VERSION`
- ▶ `CANIF_SW_MINOR_VERSION`
- ▶ `CANIF_SW_PATCH_VERSION`

### **Module ID:**

- ▶ `CANIF_MODULE_ID`

### **Vendor ID:**

- ▶ `CANIF_VENDOR_ID`

There is a third possibility to at least acquire the SW version by accessing globally visible constants:

- ▶ `CanIf_MainVersion`
- ▶ `CanIf_SubVersion`
- ▶ `CanIf_ReleaseVersion`

**Note**

The API `CanIf_GetVersionInfo()` is only available if enabled at Pre-compile time. The definitions can be accessed independent of the configuration.

## 2.15 Partial Networking

This feature consists of two sub-features:

- ▶ Wakeup Tx-PDU filter (parameter: `CanIfPnWakeupTxPduFilterSupport`)
- ▶ Handling of a partial networking CAN transceiver (parameter: `CanIfPnTrcvHandlingSupport`)

The mentioned sub-features can be used only if the attribute `CanIfPublicPnSupport` is enabled. See the following table for more information about mentioned sub-features.

| Feature                                      | Description   |
|--|---|
| <code>CanIfPnWakeupTxPduFilterSupport</code> | Tx-PDU filter which is activated if the PDU mode is changed either to <code>CANIF_SET_ONLINE_WU_FILTER</code> or to <code>CANIF_SET_TX_ONLINE_WU_FILTER</code> . This filter is active until the first Tx-confirmation / Rx-indication of the corresponding CAN controller arrives. Only certain Tx-PDUs which are labeled as Tx wakeup filter PDUs (s. parameter <code>CanIfTxPduPnFilterPdu</code> ) can pass the filter. All Tx-requests of other Tx-PDUs are refused by CAN Interface until the filter is disabled. |
| <code>CanIfPnTrcvHandlingSupport</code>      | Handling of a partial networking CAN transceiver  |

Table 2-5 Sub-features of feature Partial Networking

The parameter `CanIfPnTrcvHandlingSupport` is enabled automatically if at least one underlying CAN Transceiver Driver supports partial networking. In case of using the feature `CanIfPnWakeupTxPduFilterSupport` the Tx-PDUs which are allowed to pass the filter have to be configured accordingly. This kind of configuration can be performed individually for every Tx-PDU via the parameter `CanIfTxPduPnFilterPdu`.

**Note**

Please consider that the filter of a certain CAN controller is only active if at least one Tx-PDU of this CAN controller has the parameter `CanIfTxPduPnFilterPdu` enabled.

The feature `CanIfPnWakeupTxPduFilterSupport` is configurable in both configuration variants:

- ▶ Pre-compile
- ▶ Post-build-loadable

Except the restriction that this feature has to be enabled at Pre-compile time at all there are no any further restrictions concerning the reconfiguration of this feature in accordance with the Tx-PDUs which may pass the filter in case of a Post-build-loadable configuration variant.

## 2.16 Bus Mirroring

The Bus Mirroring can be globally enabled at Pre-compile time. If it is globally enabled, the mirroring can be enabled/disabled per CAN controller with the API `CanIf_EnableBusMirroring()` during runtime. After initialization mirroring is disabled on all CAN controllers.

When the mirroring is enabled on a CAN controller for each successfully transmitted or received CAN frame the CAN-ID, length and content is reported to the Bus Mirroring module. All received CAN frames that pass the hardware acceptance filter are reported, regardless of whether the CAN frame (L-PDU) exists in the ECU configuration or not. Transmitted CAN frames are reported when the transmission is confirmed by the Vector Informatik only CAN Driver callout API `Appl_GenericConfirmation()`.

The APIs to get the current error state, the current Rx error counter and the current Tx error counter from a CAN controller

- ▶ `CanIf_CanIf_GetControllerErrorState()`
- ▶ `CanIf_GetControllerRxErrorCounter()`
- ▶ `CanIf_GetControllerTxErrorCounter()`

are used by the Bus Mirroring module and are only available, if Bus Mirroring is globally enabled.

**Caution**

A successful transmitted CAN frame is not reported from the API `CanIf_TxConfirmation()` to the Bus Mirroring module as specified by AUTOSAR 4.4.0 but instead from the Vector Informatik only CAN Driver callout API `Appl_GenericConfirmation()`. Therefore, it is not necessary to store the content of each CAN frame before it is transmitted in the CAN interface as specified by AUTOSAR 4.4.0. The Vector Informatik CAN Driver stores the content of each CAN frame before it is transmitted and provides the stored content after a successful transmission to the CAN interface by the callout API `Appl_GenericConfirmation()`.

The feature can only be used, if all underlying CAN Drivers are from Vector Informatik and have the BSWMD parameter `CanGeneral/CanGenericConfirmationAPI2`.

## 2.17 Security event reporting

The security event reporting can be enabled at Pre-compile time. If it is enabled, every detected security event at a CAN controller is reported with the associated context data to the Intrusion Detection System Manager module (IdsM).

The following security events with their context data can be reported:

| Security event                            | Context data   |
|---|--|
| <code>CANIF_SEV_ERRORSTATE_BUSOFF</code>  | CanIf ControllerId   |
| <code>CANIF_SEV_ERRORSTATE_PASSIVE</code> | CanIf ControllerId and result, which error counter(s) exceeded the threshold |
| <code>CANIF_SEV_RX_ERROR_DETECTED</code>  | CanIf ControllerId and reception CAN error                                   |
| <code>CANIF_SEV_TX_ERROR_DETECTED</code>  | CanIf ControllerId and transmission CAN error                                |

Table 2-6 Security events with their context data

**Note**

Between the occurrence of an error state passive on a CAN controller and its notification to the CAN interface, the error counters can meanwhile have fallen below the threshold value again. In this case the CAN Interface is notified about the error state passive at a CAN controller with error counter values below the threshold. If both error counter values are below the threshold the `CANIF_SEV_ERRORSTATE_PASSIVE` is reported with the worst-case result in the context data, that both counters exceeded the threshold (`CANIF_RX_TX_THRESHOLD_EXCEEDED`), to the IdsM.

## 2.18 Multiple CAN Drivers

The CAN Interface supports multiple CAN Drivers which are implemented according to AUTOSAR specification 4.1.1.

Different CAN Drivers are addressed by using the values of attributes "VendorId" and "VendorApiInfix" defined in BSWMD file of corresponding CAN Driver.

In order to ensure compatibility with this CAN Interface the following naming convention of APIs of CAN Driver need to be provided.

`<Bsw>_<VendorId>_<VendorApiInfix>_<ApiName>`

The APIs of used CAN Driver has to be named as follows:

| Basic CAN Driver APIs  |
|--|
| Can_<VendorId>_<VendorApiInfix>_SetControllerMode              |
| Can_<VendorId>_<VendorApiInfix>_Write                          |
| Can_<VendorId>_<VendorApiInfix>_CancelTx(*)                    |
| Can_<VendorId>_<VendorApiInfix>_CheckWakeup(*)                 |
| Can_<VendorId>_<VendorApiInfix>_CheckBaudrate(*)               |
| Can_<VendorId>_<VendorApiInfix>_ChangeBaudrate(*)              |
| Can_<VendorId>_<VendorApiInfix>_SetBaudrate(*)                 |
| Can_<VendorId>_<VendorApiInfix>_GetControllerErrorState(*)     |
| Can_<VendorId>_<VendorApiInfix>_GetControllerRxErrorCounter(*) |
| Can_<VendorId>_<VendorApiInfix>_GetControllerTxErrorCounter(*) |

Table 2-7 Adapted CAN Driver APIs (\* optional)

The following table lists APIs of CAN Interface which have to be called by a CAN Driver in case of multiple CAN Drivers are configured:

| Basic CAN Driver APIs  |
|--|
| CanIf_<VendorId>_<VendorApiInfix>_RxIndication                   |
| CanIf_<VendorId>_<VendorApiInfix>_TxConfirmation                 |
| CanIf_<VendorId>_<VendorApiInfix>_ControllerBusOff               |
| CanIf_<VendorId>_<VendorApiInfix>_ControllerErrorStatePassive(*) |
| CanIf_<VendorId>_<VendorApiInfix>_ControllerModeIndication       |
| CanIf_<VendorId>_<VendorApiInfix>_CancelTxNotification(*)        |
| CanIf_<VendorId>_<VendorApiInfix>_CancelTxConfirmation(*)        |
| CanIf_<VendorId>_<VendorApiInfix>_ErrorNotification(*)           |
| Appl_<VendorId>_<VendorApiInfix>_GenericConfirmation(*)          |

Table 2-8 APIs of CAN Interface which have to be used in multiple CAN Driver configurations (\* optional)



### Caution

In case of using of a CAN Driver which is not provided by Vector Informatik please pay attention to chapter 2.1.1.2.

## 2.19 Extended RAM-check

This feature is configured via the parameter `CanIfExtendedRamCheckSupport`. For further information about configuration of this feature please refer to the description of mentioned parameter.

## 2.20 Support ASR4.4.0 CAN Driver

The CAN Interface support of CAN Drivers according to the “AUTOSAR Specification of CAN Driver Release 4.4.0” can be enabled at Pre-compile time via the parameter `CanIfPublicCfg/CanIfSupportCanDrvAsr440`.

The enabled support does only affect the interface between the CAN Interface and the underlying CAN Drivers. The interfaces to the upper layer modules and to the CAN transceiver drivers are still based on the “AUTOSAR Specification of CAN Interface Release 4.2.2” ([1], as described in chapter 4).



### Caution

The support is limited to CAN Drivers from 3rd party vendors and cannot be combined with CAN Drivers from other AUTOSAR release versions or from the MICROSAR Classic product.

## 2.21 Multi-partition

The CAN controllers (`CanIf/CanIfCtrlDrvCfg/CanIfCtrlCfg`) can be mapped to different partitions via the parameter `CanIfCtrlCfg/CanIfEcucPartitionRef`. The underlying MICROSAR Classic CAN drivers provide the information, which CAN controllers can be mapped individually or together to a partition.

Each partition can be further mapped to a (physical) core. This offers the possibility of load balancing because the processing for the CAN controllers (e.g. rx and tx processing) can then be executed in parallel.

The initialization of the CAN Interface have to be always executed on the main core.

The following configuration constraints have to be considered:

- ▶ Each different partition referenced via the parameter `CanIfCtrlCfg/CanIfEcucPartitionRef` has to be mapped to a separate core (at the corresponding `OsApplication` over `OsApplication/OsApplicationCoreRef`).
- ▶ All partitions referenced via the parameter `CanIfCtrlCfg/CanIfEcucPartitionRef` have to have the same ASIL level (parameter `EcucPartition/ASIL`).
- ▶ `CanIf-Rx-PDUs` and `CanIf-Tx-PDUs` have to be mapped to the same partition (over the referenced global PDU) as the corresponding CAN controller.



- ▶ The user of a CanIf-PDU has to be mapped to the same partition (except for the PduR as user).
- ▶ A wakeup source (referenced by `CanController/CanWakeupSourceRef` or `CanController/CanWakeupSourceId`) has to be partition unique.

The following features are unsupported in combination with multi-partition:

- ▶ CAN transceiver handling
- ▶ J1939 dynamic address support
- ▶ Security event reporting
- ▶ Bus Mirroring
- ▶ Third party CAN drivers (incl. support ASR4.4.0 CAN Driver)

## 2.22 Error Handling

### 2.22.1 Development Error Reporting

By default, development errors are reported to the DET using the service `Det_ReportError()` as specified in [2], if development error reporting is enabled (i.e. Pre-compile parameter `CANIF_DEV_ERROR_REPORT==STD_ON`).

If another module is used for development error reporting, the function prototype for reporting the error can be configured by the integrator, but must have the same signature as the service `Det_ReportError()`.

The reported CAN Interface ID is 60.

The reported service IDs identify the services which are described in chapter 4. The following table presents the service IDs and the related services:

| Service ID |  | Service                                |
|------------|--|--|
| 1          | <code>CANIF_INIT_API</code>                | <code>CanIf_Init</code>                |
| 3          | <code>CANIF_SETCONTROLLERMODE_API</code>   | <code>CanIf_SetControllerMode</code>   |
| 4          | <code>CANIF_GETCONTROLLERMODE_API</code>   | <code>CanIf_GetControllerMode</code>   |
| 5          | <code>CANIF_TRANSMIT_API</code>            | <code>CanIf_Transmit</code>            |
| 9          | <code>CANIF_SETPDUMODE_API</code>          | <code>CanIf_SetPduMode</code>          |
| 10         | <code>CANIF_GETPDUMODE_API</code>          | <code>CanIf_GetPduMode</code>          |
| 11         | <code>CANIF_GETVERSIONINFO_API</code>      | <code>CanIf_GetVersionInfo</code>      |
| 12         | <code>CANIF_SETDYNAMICTXID_API_ID</code>   | <code>CanIf_SetDynamicTxId</code>      |
| 13         | <code>CANIF_SETTRCVMODE_API</code>         | <code>CanIf_SetTrcvMode</code>         |
| 14         | <code>CANIF_GETTRCVMODE_API</code>         | <code>CanIf_GetTrcvMode</code>         |
| 15         | <code>CANIF_GETTRCVWAKEUPREASON_API</code> | <code>CanIf_GetTrcvWakeupReason</code> |
| 16         | <code>CANIF_SETTRCVWAKEUPMODE_API</code>   | <code>CanIf_SetTrcvWakeupMode</code>   |
| 17         | <code>CANIF_CHECKWAKEUP_API</code>         | <code>CanIf_CheckWakeup</code>         |

| Service ID |                                       | Service                           |
|------------|---------------------------------------|-----------------------------------|
| 18         | CANIF_CHECKVALIDATIONUP_API           | CanIf_CheckValidation             |
| 19         | CANIF_TXCONFIRMATION_API              | CanIf_TxConfirmation              |
| 20         | CANIF_RXINDICATION_API                | CanIf_RxIndication                |
| 21         | CANIF_CANCELTXCONFIRMATION_API        | CanIf_CancelTxConfirmation        |
| 22         | CANIF_CONTROLLERBUSOFF_API            | CanIf_ControllerBusoff            |
| 23         | CANIF_CONTROLLERMODEINDICATION_API    | CanIf_ControllerModeIndication    |
| 24         | CANIF_TRCVMODEINDICATION_API          | CanIf_TrcvModeIndication          |
| 25         | CANIF_GETTXCONFIRMATIONSTATE_API      | CanIf_GetTxConfirmationState      |
| 26         | CANIF_CONFIRMPNAVAILABILITY_API       | CanIf_ConfirmPnAvailability       |
| 27         | CANIF_BAUDRATECHANGE_API              | CanIf_ChangeBaudrate              |
| 28         | CANIF_BAUDRATECHECK_API               | CanIf_CheckBaudrate               |
| 30         | CANIF_CLEARTRCVWUFFLAG_API            | CanIf_ClearTrcvWuffFlag           |
| 31         | CANIF_CHECKTRCVWAKEFLAG_API           | CanIf_CheckTrcvWakeFlag           |
| 32         | CANIF_CLEARTRCVWUFFLAGINDICATION_API  | CanIf_ClearTrcvWuffFlagIndication |
| 33         | CANIF_CHECKTRCVWAKEFLAGINDICATION_API | CanIf_CheckTrcvWakeFlagIndication |
| 39         | CANIF_BAUDRATESET_API                 | CanIf_SetBaudrate                 |
| 75         | CANIF_GETCONTROLLERERRORSTATE_API     | CanIf_GetControllerErrorState     |
| 76         | CANIF_ENABLEBUSMIRRORING_API          | CanIf_EnableBusMirroring          |
| 77         | CANIF_GETCONTROLLERRXERRORCOUNTER_API | CanIf_GetControllerRxErrorCounter |
| 78         | CANIF_GETCONTROLLERTXERRORCOUNTER_API | CanIf_GetControllerTxErrorCounter |
| 79         | CANIF_CONTROLLERERRORSTATEPASSIVE_API | CanIf_ControllerErrorStatePassive |
| 80         | CANIF_ERRORNOTIFICATION_API           | CanIf_ErrorNotification           |
| 243        | CANIF_APPL_GENERICCONFIRMATION_API    | Appl_GenericConfirmation          |
| 244        | CAN_IF_RAMCHECKCORRUPTCONTROLLER_API  | CanIf_RamCheckCorruptController   |
| 245        | CAN_IF_RAMCHECKCORRUPTMAILBOX_API     | CanIf_RamCheckCorruptMailbox      |
| 246        | CANIF_SETPDURECEPTIONMODE_API         | CanIf_SetPduReceptionMode         |
| 247        | CANIF_RAMCHECKENABLECONTROLLER_API    | CanIf_RamCheckEnableController    |
| 248        | CANIF_RAMCHECKENABLEMAILBOX_API       | CanIf_RamCheckEnableMailbox       |
| 249        | CANIF_RAMCHECKEXECUTE_API             | CanIf_RamCheckExecute             |
| 250        | CANIF_CANCELTRANSMIT_API              | CanIf_CancelTransmit              |
| 251        | CANIF_TXNOTIFICATION_API              | CanIf_CancelTxNotification        |

| Service ID |                                   | Service                      |
|------------|-----------------------------------|------------------------------|
| 252        | CANIF_SETADDRESSSTABLEENTRY_API   | CanIf_SetAddressTableEntry   |
| 253        | CANIF_RESETADDRESSSTABLEENTRY_API | CanIf_ResetAddressTableEntry |

Table 2-9 Service IDs

The errors reported to DET are described in the following table:

| Error Code |                            | Description  |
|------------|----------------------------|--|
| 10         | CANIF_E_PARAM_CANID        | Used in context of following functions if an invalid CAN identifier is passed: <ul style="list-style-type: none"> <li>- CanIf_RxIndication</li> <li>- CanIf_SetDynamicTxId</li> </ul>  |
| 11         | CANIF_E_PARAM_DLC          | Used in context of following functions if a PDU with invalid data length is passed: <ul style="list-style-type: none"> <li>- CanIf_RxIndication</li> <li>- CanIf_Transmit</li> <li>- CanIf_CancelTxConfirmation</li> </ul>   |
| 12         | CANIF_E_PARAM_HRH          | Used in context of following function if an invalid hardware receive handle is passed: <ul style="list-style-type: none"> <li>- CanIf_RxIndication</li> </ul>  |
| 13         | CANIF_E_PARAM_LPDU         | Used in context of following functions if an invalid Tx-PDU is passed: <ul style="list-style-type: none"> <li>- CanIf_TxConfirmation</li> <li>- CanIf_CancelTxConfirmation</li> <li>- CanIf_CancelTxNotification</li> <li>- Appl_GenericConfirmation</li> </ul>  |
| 14         | CANIF_E_PARAM_CONTROLLER   | Used in context of following functions if an invalid CAN controller is passed: <ul style="list-style-type: none"> <li>- CanIf_ControllerBusOff</li> <li>- CanIf_ControllerModeIndication</li> <li>- CanIf_GetTxConfirmationState</li> <li>- CanIf_SetTrcvMode</li> <li>- CanIf_GetTrcvMode</li> <li>- CanIf_GetTrcvWakeupReason</li> <li>- CanIf_SetTrcvWakeupMode</li> <li>- CanIf_TrvcModeIndication</li> <li>- CanIf_ConfirmPnAvailability</li> <li>- CanIf_ClearTrcvWufFlag</li> <li>- CanIf_ClearTrcvWufFlagIndication</li> <li>- CanIf_CheckTrcvWakeFlag</li> <li>- CanIf_CheckTrcvWakeFlagIndication</li> </ul> |
| 15         | CANIF_E_PARAM_CONTROLLERID | Used in context of following functions if an invalid CAN controller is passed: <ul style="list-style-type: none"> <li>- CanIf_SetControllerMode</li> </ul>   |

| Error Code |                            | Description   |
|------------|----------------------------|---|
| 15         | CANIF_E_PARAM_CONTROLLERID | <ul style="list-style-type: none"> <li>- CanIf_GetControllerMode</li> <li>- CanIf_SetPduMode</li> <li>- CanIf_GetPduMode</li> <li>- CanIf_CheckBaudrate</li> <li>- CanIf_ChangeBaudrate</li> <li>- CanIf_SetBaudrate</li> <li>- CanIf_SetAddressTableEntry</li> <li>- CanIf_ResetAddressTableEntry</li> <li>- CanIf_Transmit</li> <li>- CanIf_TxConfirmation</li> <li>- CanIf_CancelTxConfirmation</li> <li>- CanIf_CancelTransmit</li> <li>- CanIf_CheckWakeup</li> <li>- CanIf_RamCheckExecute</li> <li>- CanIf_RamCheckEnableMailbox</li> <li>- CanIf_RamCheckEnableController</li> <li>- CanIf_GetControllerErrorState</li> <li>- CanIf_GetControllerRxErrorCounter</li> <li>- CanIf_GetControllerTxErrorCounter</li> <li>- CanIf_EnableBusMirroring</li> <li>- Appl_GenericConfirmation</li> <li>- CanIf_ControllerErrorStatePassive</li> <li>- CanIf_ErrorNotification</li> </ul> |
| 16         | CANIF_E_PARAM_WAKEUPSOURCE | <p>Used in context of following functions if an invalid wakeup source is passed:</p> <ul style="list-style-type: none"> <li>- CanIf_CheckValidation</li> <li>- CanIf_CheckWakeup</li> </ul>   |
| 17         | CANIF_E_PARAM_TRCV         | <p>Used in context of following functions if an invalid CAN transceiver is passed:</p> <ul style="list-style-type: none"> <li>- CanIf_TrvcvModeIndication</li> <li>- CanIf_GetTrcvWakeupReason</li> <li>- CanIf_GetTrcvMode</li> <li>- CanIf_SetTrcvMode</li> <li>- CanIf_SetTrcvWakeupMode</li> <li>- CanIf_ConfirmPnAvailability</li> <li>- CanIf_ClearTrcvWufFlagIndication</li> <li>- CanIf_CheckTrcvWakeFlagIndication</li> <li>- CanIf_ClearTrcvWufFlag</li> <li>- CanIf_CheckTrcvWakeFlag</li> <li>- CanIf_CheckWakeup</li> </ul>  |

| Error Code |                              | Description   |
|------------|------------------------------|---|
| 18         | CANIF_E_PARAM_TRCVMODE       | Used in context of following function if an invalid CAN transceiver mode is passed:<br><ul style="list-style-type: none"> <li>- CanIf_SetTrcvMode</li> </ul>  |
| 19         | CANIF_E_PARAM_TRCVWAKEUPMODE | Used in context of following function if an invalid CAN transceiver wakeup mode is passed:<br><ul style="list-style-type: none"> <li>- CanIf_SetTrcvWakeupMode</li> </ul>   |
| 20         | CANIF_E_PARAM_POINTER        | Used in context of following functions if an invalid pointer is passed:<br><ul style="list-style-type: none"> <li>- CanIf_Init</li> <li>- CanIf_GetControllerMode</li> <li>- CanIf_Transmit</li> <li>- CanIf_RxIndication</li> <li>- CanIf_GetPduMode</li> <li>- CanIf_GetVersionInfo</li> <li>- CanIf_GetTrcvWakeupReason</li> <li>- CanIf_GetTrcvMode</li> <li>- CanIf_CancelTxConfirmation</li> <li>- CanIf_GetControllerErrorState</li> <li>- CanIf_GetControllerRxErrorCounter</li> <li>- CanIf_GetControllerTxErrorCounter</li> <li>- Appl_GenericConfirmation</li> </ul> |
| 21         | CANIF_E_PARAM_CTRLMODE       | Used in context of following function if an invalid CAN controller mode is passed:<br><ul style="list-style-type: none"> <li>- CanIf_SetControllerMode</li> </ul>   |
| 22         | CANIF_E_PARAM_PDU_MODE       | Used in context of following function if an invalid PDU mode is passed:<br><ul style="list-style-type: none"> <li>- CanIf_SetPduMode</li> </ul>   |
| 23         | CANIF_E_PARAM_CAN_ERROR      | Used in context of following function if an invalid CAN error is passed:<br><ul style="list-style-type: none"> <li>- CanIf_ErrorNotification</li> </ul>   |
| 30         | CANIF_E_UNINIT               | Used in context of following functions if called before the CAN Interface is initialized:<br><ul style="list-style-type: none"> <li>- CanIf_Transmit</li> <li>- CanIf_TxConfirmation</li> <li>- CanIf_RxIndication</li> <li>- CanIf_ControllerBusOff</li> <li>- CanIf_SetPduMode</li> <li>- CanIf_GetPduMode</li> <li>- CanIf_CancelTxConfirmation</li> <li>- CanIf_CheckWakeup</li> <li>- CanIf_CheckValidation</li> <li>- CanIf_GetTrcvWakeupReason</li> <li>- CanIf_SetTrcvWakeupMode</li> </ul>   |

| Error Code                                 | Description  |
|--|--|
| <b>30</b> CANIF_E_UNINIT                   | <ul style="list-style-type: none"> <li>- CanIf_ControllerModeIndication</li> <li>- CanIf_SetDynamicTxId</li> <li>- CanIf_TrcvModeIndication</li> <li>- CanIf_SetControllerMode</li> <li>- CanIf_GetControllerMode</li> <li>- CanIf_CancelTxNotification</li> <li>- CanIf_SetTrcvMode</li> <li>- CanIf_GetTrcvMode</li> <li>- CanIf_CancelTransmit</li> <li>- CanIf_ConfirmPnAvailability</li> <li>- CanIf_ClearTrcvWufFlagIndication</li> <li>- CanIf_CheckTrcvWakeFlagIndication</li> <li>- CanIf_ClearTrcvWufFlag</li> <li>- CanIf_CheckTrcvWakeFlag</li> <li>- CanIf_GetTxConfirmationState</li> <li>- CanIf_CheckBaudrate</li> <li>- CanIf_ChangeBaudrate</li> <li>- CanIf_SetBaudrate</li> <li>- CanIf_SetPduReceptionMode</li> <li>- CanIf_SetAddressTableEntry</li> <li>- CanIf_ResetAddressTableEntry</li> <li>- CanIf_RamCheckExecute</li> <li>- CanIf_RamCheckEnableMailbox</li> <li>- CanIf_RamCheckEnableController</li> <li>- CanIf_SetPduReceptionMode</li> <li>- CanIf_GetControllerErrorState</li> <li>- CanIf_GetControllerRxErrorCounter</li> <li>- CanIf_GetControllerTxErrorCounter</li> <li>- CanIf_EnableBusMirroring</li> <li>- Appl_GenericConfirmation</li> <li>- CanIf_ControllerErrorStatePassive</li> <li>- CanIf_ErrorNotification</li> </ul> |
| <b>40</b> CANIF_E_NOK_NOSUPPORT            | Not used.  |
| <b>44</b> CANIF_E_INVALID_PDURECEPTIONMODE | Used in context of following function if an invalid reception mode is passed: <ul style="list-style-type: none"> <li>- CanIf_SetPduReceptionMode</li> </ul>  |
| <b>50</b> CANIF_E_INVALID_TXPDUID          | Used in context of following functions if an invalid Tx-PDU is passed: <ul style="list-style-type: none"> <li>- CanIf_CancelTransmit</li> <li>- CanIf_SetDynamicTxId</li> <li>- CanIf_Transmit</li> <li>- CanIf_TxConfirmation</li> </ul>  |

| Error Code   |                               | Description   |
|--|-------------------------------|---|
| 60   | CANIF_E_INVALID_RXPDUID       | Used in context of following function if an invalid Rx-PDU is passed:<br><ul style="list-style-type: none"> <li>- CanIf_SetPduReceptionMode</li> </ul>  |
| 61   | CANIF_E_INVALID_DLC           | Used in context of following function if the length of received PDU is invalid (smaller than the configured one):<br><ul style="list-style-type: none"> <li>- CanIf_HlIndication</li> </ul>   |
| 70   | CANIF_E_STOPPED               | Used in context of following function if it is called while either the controller mode is STOPPED or the PDU mode is OFFLINE:<br><ul style="list-style-type: none"> <li>- CanIf_Transmit</li> </ul>   |
| 71   | CANIF_E_NOT_SLEEP             | Used in context of following function if it is called while the CAN controller mode is neither in SLEEP nor in STOPPED.<br><ul style="list-style-type: none"> <li>- CanIf_CheckWakeup</li> </ul>  |
| 90   | CANIF_E_TXPDU_LENGTH_EXCEEDED | Used to inform that a PDU which shall be transmitted exceeds the configured length.<br>Used in context of following function:<br><ul style="list-style-type: none"> <li>- CanIf_Transmit</li> </ul>   |
| Additionally defined error codes (not AUTOSAR compliant) |                               |   |
| 45   | CANIF_E_CONFIG                | Used to detect inconsistent data in the generated files due to misconfiguration.<br>Used in context of following functions:<br><ul style="list-style-type: none"> <li>- CanIf_RxIndication</li> <li>- CanIf_Transmit</li> <li>- CanIf_RamCheckCorruptMailbox</li> <li>- CanIf_RamCheckCorruptController</li> <li>- CanIf_RamCheckExecute</li> <li>- CanIf_RamCheckEnableMailbox</li> <li>- CanIf_GetControllerErrorState</li> <li>- CanIf_GetControllerRxErrorCounter</li> <li>- CanIf_GetControllerTxErrorCounter</li> </ul> |
| 46   | CANIF_E_FATAL                 | Used to detect either an invalid (out of bounce) write access to a variable or an invalid read access to function pointer tables in order to prevent undefined behaviour at runtime.<br>Used in context of following functions:<br><ul style="list-style-type: none"> <li>- CanIf_Init</li> <li>- CanIf_Transmit</li> </ul>   |

| Error Code |                                 | Description   |
|------------|---------------------------------|---|
| 46         | CANIF_E_FATAL                   | <ul style="list-style-type: none"> <li>- CanIf_CancelTxConfirmation</li> <li>- CanIf_CancelTransmit</li> <li>- CanIf_CancelTxNotification</li> <li>- CanIf_TxConfirmation</li> </ul>  |
| 47         | CANIF_E_INVALID_SA              | Used in context of following functions if an invalid J1939 source address (SA) is determined: <ul style="list-style-type: none"> <li>- CanIf_Transmit</li> <li>- CanIf_RxIndication</li> </ul>                                      |
| 48         | CANIF_E_INVALID_DA              | Used in context of following functions if an invalid J1939 destination address (DA) is determined: <ul style="list-style-type: none"> <li>- CanIf_Transmit</li> <li>- CanIf_RxIndication</li> </ul>                                 |
| 49         | CANIF_E_INVALID_CANIDTYPE_SIZE  | Used in context of following function if the size [bytes] of type Can_IdType is inconsistent between static and generated code: <ul style="list-style-type: none"> <li>- CanIf_Init</li> </ul>                                      |
| 50         | CANIF_E_INVALID_DLC_METADATA    | Used in context of following function if a Rx-PDU of type: meta data is received with invalid length <ul style="list-style-type: none"> <li>- CanIf_RxIndication</li> </ul>   |
| 51         | CANIF_E_FULL_TX_BUFFER_FIFO     | Used to inform that the transmit-buffer of handling type FIFO is full and that no further Tx-PDUs can be buffered.<br><br>Used in context of following function: <ul style="list-style-type: none"> <li>- CanIf_Transmit</li> </ul> |
| 52         | CANIF_E_INVALID_DOUBLEHASH_CALC | Used in context of following function if the calculated match via the double hash algorithm for a received CAN message is not in valid range: <ul style="list-style-type: none"> <li>- CanIf_RxIndication</li> </ul>                |
| 53         | CANIF_E_TX_BUFFER_TRANSMIT      | Used in context of the following function as information that the transmission out of a Tx-Buffer has failed: <ul style="list-style-type: none"> <li>- CanIf_Transmit</li> </ul>  |

Table 2-10 Errors reported to DET


**Caution**

If the development error detection is disabled not only the reporting of the errors is suppressed but also the detection i.e. the verification of valid function parameters.



### **2.22.2 Production Code Error Reporting**

The CAN Interface has no specified Production Errors [1]. Therefore, the CAN Interface does not support a Production Code Error Reporting.

### 3 Integration

This chapter gives necessary information for the integration of the MICROSAR Classic CAN Interface into an application environment of an ECU.

#### 3.1 Embedded Implementation

The delivery of the CAN Interface contains these source code files:

| File Name            | Description  | Integration Tasks |
|----------------------|--|-------------------|
| CanIf.c              | This is the source file of the CAN Interface. It contains the implementation of the CAN Interface.   | -                 |
| CanIf.h              | This is the header file of the CAN Interface. It contains the declaration of the public APIs and global data of the CAN Interface. The file has to be included by upper layer modules to use the service functions provided by the CAN Interface.          | -                 |
| CanIf_Cbk.h          | This is the callback function header file of the CAN Interface. It contains the declaration of the callback functions of the CAN Interface. The file has to be included by lower layer modules to access callback functions provided by the CAN Interface. | -                 |
| CanIf_Types.h        | This is the type definition header file of the CAN Interface. It contains the definition of types provided by the CAN Interface which have to be used by other modules. This file is included automatically if either CanIf.h or CanIf_Cbk.h is included.  | -                 |
| CanIf_GeneralTypes.h | This is the general type definition header file of the CAN Interface. It contains the public types of the CAN Interface. This header file is included by Can_GeneralTypes.h.   | -                 |
| CanIf_MemMap.h       | Generated header file that contains the memory mapping sections of the CAN Interface. This file is included automatically by CanIf.h, CanIf.c, CanIf_Cbk.h, CanIf_Cfg.h, CanIf_Lcfg.c and CanIf_PBcfg.c.   | -                 |
| CanIf_Cfg.h          | Generated header file that contains public constant data, external data declarations, type definitions and abstracted access to the generated data and variables. The file is included automatically by CanIf.h and CanIf_Cbk.h.                           | -                 |
| CanIf_Lcfg.c         | Generated source file that contains Pre-compile configuration data and variables. The file contains content in case of Pre-compile and Post-build configuration variant.   | -                 |
| CanIf_PBcfg.c        | Generated source file that contains Post-build configuration data and variables. The file contains content only in case of Post-build configuration variant.   | -                 |

| File Name       | Description   | Integration Tasks |
|-----------------|---|-------------------|
| CanIf_CanTrcv.h | Generated header file that contains the includes of the necessary header files of the CAN transceiver drivers used in the system. | -                 |
| CanIf_Can.h     | Generated header file that contains only the include of CanIf_Cbk.h, if feature "Support ASR4.4.0 CAN Driver" is enabled.         | -                 |

Table 3-1 Implementation files

### 3.2 Critical Sections

The AUTOSAR standard provides the BSW Scheduler, that handles entering and leaving critical sections. The CAN Interface provides critical section codes that have to be mapped by the BSW Scheduler to following mechanism:

| Critical Section Define | Description   |
|-------------------------|---|
| CANIF_EXCLUSIVE_AREA_0  | <p>Ensures consistency while modifying/changing the CAN-Interface controller mode.</p> <ul style="list-style-type: none"> <li>&gt; Used inside CanIf_SetControllerMode()</li> <li>&gt; Duration is long</li> <li>&gt; Calls to Can_SetControllerMode() and to several sub-functions</li> </ul>  |
| CANIF_EXCLUSIVE_AREA_1  | <p>Ensures the consistency of transmit queue.</p> <ul style="list-style-type: none"> <li>&gt; Used inside CanIf_Init(), CanIf_SetControllerMode(), CanIf_ControllerBusOff(), CanIf_SetPduMode(), CanIf_CancelTxConfirmation() and CanIf_CancelTransmit()</li> <li>&gt; Duration is medium</li> <li>&gt; Calls to several sub-functions</li> </ul> |
| CANIF_EXCLUSIVE_AREA_2  | <p>Ensures the consistency of transmit queue and mode handling.</p> <ul style="list-style-type: none"> <li>&gt; Used inside CanIf_TxConfirmation(), CanIf_CancelTxConfirmation() and CanIf_CancelTxNotification</li> <li>&gt; Duration is long</li> <li>&gt; Calls to Can_Write() and to several sub-functions</li> </ul>                         |
| CANIF_EXCLUSIVE_AREA_3  | <p>Ensures the consistency of transmit queue and mode handling.</p> <ul style="list-style-type: none"> <li>&gt; Used inside CanIf_SetPduMode()</li> <li>&gt; Duration is medium</li> <li>&gt; Calls to several sub-functions</li> </ul>   |
| CANIF_EXCLUSIVE_AREA_4  | <p>Ensures the consistency while transmission.</p> <ul style="list-style-type: none"> <li>&gt; Used inside CanIf_Transmit()</li> <li>&gt; Duration is long</li> <li>&gt; Calls to Can_Write() and to several sub-functions</li> </ul>   |

| Critical Section Define | Description   |
|-------------------------|---|
| CANIF_EXCLUSIVE_AREA_5  | Ensures the consistency of the dynamic CAN identifier. <ul style="list-style-type: none"> <li>&gt; Used inside <code>CanIf_SetDynamicTxId()</code></li> <li>&gt; Duration is short</li> <li>&gt; No calls inside</li> </ul>   |
| CANIF_EXCLUSIVE_AREA_6  | Ensures the consistency of the dynamic J1939 addressing indirection. <ul style="list-style-type: none"> <li>&gt; Used inside <code>CanIf_SetAddressTableEntry()</code> and <code>CanIf_ResetAddressTableEntry()</code></li> <li>&gt; Duration is short</li> <li>&gt; No calls inside</li> </ul> |
| CANIF_EXCLUSIVE_AREA_7  | Ensures the consistent usage of the dynamic J1939 addressing informations. <ul style="list-style-type: none"> <li>&gt; Usage inside <code>CanIf_RxIndication()</code></li> <li>&gt; Duration is short</li> <li>&gt; No calls inside</li> </ul>  |

Table 3-2 Critical Section Codes

If the exclusive areas are entered the upper layer needs to make sure that the CAN interrupts are disabled. Additionally the following table describes which API of the CAN Interface must not be called during the corresponding area is entered. The CAN Interface API `CanIf_CancelTxNotification()` / `CanIf_CancelTxConfirmation()` is entered mostly via the CAN interrupt. In case of a platform which confirmation for a transmit cancellation needs to be polled the corresponding API (for example `Can_MainFunction_Write()`) must not be called if the corresponding lock area is entered.

|   | CANIF_EXCLUSI<br>VE_AREA_0 | CANIF_EXCLUSI<br>E_AREA_1 | CANIF_EXCLUSI<br>E_AREA_2 | CANIF_EXCLUSI<br>VE_AREA_3 | CANIF_EXCLUSI<br>VE_AREA_4 | CANIF_EXCLUSI<br>VE_AREA_5 | CANIF_EXCLUSI<br>VE_AREA_6 | CANIF_EXCLUSI<br>VE_AREA_7 |
|---|----------------------------|---------------------------|---------------------------|----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|
| CanIf_Init  | ■                          | ■                         | ■                         | ■                          | ■                          | ■                          | ■                          | ■                          |
| CanIf_InitMemory  | ■                          |                           |                           |                            |                            |                            |                            |                            |
| CanIf_Transmit  | ■                          | ■                         | ■                         | ■                          | ■                          | ■                          | ■                          |                            |
| CanIf_CancelTransmit                                      | ■                          | ■                         | ■                         | ■                          | ■                          |                            |                            |                            |
| CanIf_SetControllerMode                                   | ■                          | ■                         | ■                         | ■                          | ■                          |                            |                            |                            |
| CanIf_CancelTxNotification/<br>CanIf_CancelTxConfirmation | ■                          | ■                         | ■                         | ■                          | ■                          |                            |                            |                            |
| CanIf_SetPduMode  | ■                          | ■                         | ■                         | ■                          | ■                          |                            |                            |                            |
| CanIf_TxConfirmation                                      | ■                          | ■                         | ■                         | ■                          | ■                          |                            |                            |                            |
| CanIf_ControllerBusOff                                    | ■                          | ■                         | ■                         | ■                          | ■                          |                            |                            |                            |
| CanIf_RxIndication  |                            |                           |                           |                            |                            |                            | ■                          |                            |
| CanIf_SetAddressTableEntry                                |                            |                           |                           |                            | ■                          |                            | ■                          | ■                          |
| CanIf_ResetAddressTableEntry                              |                            |                           |                           |                            | ■                          |                            | ■                          | ■                          |

Table 3-3 Restrictions for the different lock areas

### 3.3 Compiler Abstraction and Memory Mapping

The objects (e.g. variables, functions, constants) are declared by compiler independent definitions – the compiler abstraction definitions. Each compiler abstraction definition is assigned to a memory section.

The following table contains the memory section names and the compiler abstraction definitions defined for the CAN Interface and illustrates their assignment among each other.

| Memory Mapping Sections   | Compiler Abstraction Definitions | CANIF_VAR_ZEROINIT | CANIF_VAR_INIT | CANIF_VAR_NOINIT | CANIF_CONST | CANIF_PBCFG | CANIF_CODE | CANIF_APPL_CODE | CANIF_APPL_VAR | CANIF_APPL_PBCFG | CANIF_VAR_PBCFG |
|---|----------------------------------|--------------------|----------------|------------------|-------------|-------------|------------|-----------------|----------------|------------------|-----------------|
| CANIF_START_SEC_CODE<br>CANIF_STOP_SEC_CODE   |                                  |                    |                |                  |             |             | ■          |                 |                |                  |                 |
| CANIF_START_SEC_PBCFG<br>CANIF_STOP_SEC_PBCFG   |                                  |                    |                |                  |             | ■           |            |                 |                |                  |                 |
| CANIF_START_SEC_CONST_8BIT<br>CANIF_STOP_SEC_CONST_8BIT                               |                                  |                    |                |                  | ■           |             |            |                 |                |                  |                 |
| CANIF_START_SEC_CONST_32BIT<br>CANIF_STOP_SEC_CONST_32BIT                             |                                  |                    |                |                  | ■           |             |            |                 |                |                  |                 |
| CANIF_START_SEC_CONST_UNSPECIFIED<br>CANIF_STOP_SEC_CONST_UNSPECIFIED                 |                                  |                    |                |                  | ■           |             |            |                 |                |                  |                 |
| CANIF_START_SEC_VAR_NOINIT_UNSPECIFIED<br>CANIF_STOP_SEC_VAR_NOINIT_UNSPECIFIED       |                                  |                    |                | ■                |             |             |            |                 |                |                  |                 |
| CANIF_START_SEC_VAR_ZERO_INIT_UNSPECIFIED<br>CANIF_STOP_SEC_VAR_ZERO_INIT_UNSPECIFIED |                                  | ■                  |                |                  |             |             |            |                 |                |                  |                 |
| CANIF_START_SEC_VAR_INIT_UNSPECIFIED<br>CANIF_STOP_SEC_VAR_INIT_UNSPECIFIED           |                                  |                    | ■              |                  |             |             |            |                 |                |                  |                 |
| CANIF_START_SEC_VAR_PBCFG<br>CANIF_STOP_SEC_VAR_PBCFG                                 |                                  |                    |                |                  |             |             |            |                 |                |                  | ■               |

Table 3-4 Compiler abstraction and memory mapping

The Compiler Abstraction Definitions `CANIF_APPL_CODE`, `CANIF_APPL_VAR` and `CANIF_APPL_PBCFG` are used to address code, variables and constants which are declared by other modules and used by the CAN Interface.

These definitions are not mapped by the CAN Interface but by the memory mapping realized in the CAN Driver, CAN Transceiver Driver, PDU Router, Network management, Transport Protocol Layer, ECU State Manager and the CAN State manager.

## 4 API Description

For an interfaces overview please see Figure 1-1.

### 4.1 Services provided by CAN Interface

#### 4.1.1 CanIf\_InitMemory

| Prototype  |   |
|--|---|
| void <b>CanIf_InitMemory</b> ( void )  |   |
| Parameter  |   |
| -  | - |
| Return code  |   |
| -  | - |
| Functional Description   |   |
| Initializes global RAM variables, which have to be available before any other API of the CAN-Interface is called. Sets the CAN-Interface to the state: uninitialized.  |   |
| Particularities and Limitations  |   |
| <ul style="list-style-type: none"> <li>&gt; Service ID: see table 'Service IDs'</li> <li>&gt; This function is synchronous.</li> <li>&gt; This function is non-reentrant.</li> <li>&gt; May only be called once before <code>CanIf_Init()</code>.</li> <li>&gt; Configuration Variant(s): -</li> </ul> |   |
| Call context   |   |
| > TASK   |   |

Table 4-1 CanIf\_InitMemory

## 4.1.2 CanIf\_Init

| Prototype   |   |
|---|---|
| void <b>CanIf_Init</b> ( const CanIf_ConfigType *ConfigPtr )  |   |
| Parameter   |   |
| ConfigPtr [in]  | <p>Pointer to the CanIf_Config structure.</p> <p>If multiple configurations are available, the active configuration can be selected by using the related CanIf_Config_&lt;IdentityName&gt; structure.</p> |
| Return code   |   |
| -   | -   |
| Functional Description  |   |
| Initializes the CAN-Interface.  |   |
| Particularities and Limitations   |   |
| <ul style="list-style-type: none"> <li>&gt; Service ID: see table 'Service IDs'</li> <li>&gt; This function is synchronous.</li> <li>&gt; This function is non-reentrant.</li> <li>&gt; The function CanIf_InitMemory() must be called before the function CanIf_Init() is called. This function must be called before any other service functionality of the CAN-Interface.</li> <li>&gt; Configuration Variant(s): -</li> </ul> |   |
| Call context  |   |
| <ul style="list-style-type: none"> <li>&gt; TASK</li> </ul>   |   |

Table 4-2 CanIf\_Init



### 4.1.3 CanIf\_SetControllerMode

| Prototype   |   |
|---|---|
| Std_ReturnType <b>CanIf_SetControllerMode</b> ( uint8 ControllerId,<br>CanIf_ControllerModeType ControllerMode )  |   |
| Parameter   |   |
| ControllerId [in]   | Abstracted CanIf ControllerId which is assigned to a CAN controller, which is requested for controller mode transition. |
| ControllerMode [in]   | Requested controller mode transition.   |
| Return code   |   |
| E_OK  | The request to change the controller mode has been accepted.  |
| E_NOT_OK  | The request to change the controller mode has not been accepted.  |
| Functional Description  |   |
| Requests a controller mode transition of a CAN controller.<br>Supported controller modes:<br>CANIF_CS_SLEEP<br>CANIF_CS_STOPPED<br>CANIF_CS_STARTED   |   |
| Particularities and Limitations   |   |
| <ul style="list-style-type: none"> <li>&gt; Service ID: see table 'Service IDs'</li> <li>&gt; This function is asynchronous.</li> <li>&gt; This function is non-reentrant.</li> <li>&gt; CAN interrupts are not disabled (especially necessary in case of transition to CANIF_CS_SLEEP).</li> <li>&gt; Configuration Variant(s): -</li> </ul> |   |
| Call context  |   |
| <ul style="list-style-type: none"> <li>&gt; ANY</li> </ul>  |   |

Table 4-3 CanIf\_SetControllerMode

#### 4.1.4 CanIf\_GetControllerMode

| Prototype   |  |
|---|--|
| Std_ReturnType <b>CanIf_GetControllerMode</b> ( uint8 ControllerId,<br>CanIf_ControllerModeType *ControllerModePtr )  |  |
| Parameter   |  |
| ControllerId [in]   | Abstracted CanIf ControllerId which is assigned to a CAN controller, which is requested for its current controller mode. |
| ControllerModePtr [out]   | Pointer to memory location, where the current controller mode of the CAN controller will be stored.                      |
| Return code   |  |
| E_OK  | Controller mode request has been accepted; current controller mode is stored at ControllerModePtr.                       |
| E_NOT_OK  | Controller mode request has not been accepted.   |
| Functional Description  |  |
| Returns the current controller mode of a CAN controller.  |  |
| Particularities and Limitations   |  |
| <ul style="list-style-type: none"><li>&gt; Service ID: see table 'Service IDs'</li><li>&gt; This function is synchronous.</li><li>&gt; This function is reentrant.</li><li>&gt; Configuration Variant(s): -</li></ul> |  |
| Call context  |  |
| <ul style="list-style-type: none"><li>&gt; ANY</li></ul>  |  |

Table 4-4 CanIf\_GetControllerMode

### 4.1.5 CanIf\_Transmit

| Prototype  |  |
|--|--|
| Std_ReturnType <b>CanIf_Transmit</b> ( PduIdType CanTxPduId, const PduInfoType *PduInfoPtr )   |  |
| Parameter  |  |
| CanTxPduId [in]  | Handle of Tx-PDU which shall be transmitted.                 |
| PduInfoPtr [in]  | Pointer to a struct containing the properties of the Tx PDU. |
| Return codine  |  |
| E_OK   | Transmit request has been accepted.                          |
| E_NOT_OK   | Transmit request has not been accepted.                      |
| Functional Description   |  |
| Initiates a request for transmission of the specified Tx-PDU.  |  |
| Particularities and Limitations  |  |
| <ul style="list-style-type: none"> <li>&gt; Service ID: see table 'Service IDs'</li> <li>&gt; This function is synchronous.</li> <li>&gt; This function is reentrant (only for a different CanTxPduId).</li> <li>&gt; Configuration Variant(s): -</li> </ul> |  |
| Call context   |  |
| <ul style="list-style-type: none"> <li>&gt; ANY</li> </ul>   |  |

Table 4-5 CanIf\_Transmit

## 4.1.6 CanIf\_CancelTransmit

| Prototype  |  |
|--|--|
| Std_ReturnType <b>CanIf_CancelTransmit</b> ( PduIdType CanTxPduId )  |  |
| Parameter  |  |
| CanTxPduId [in]  | Handle of Tx-PDU which shall be canceled.            |
| Return code  |  |
| E_OK   | Transmit cancellation request has been accepted.     |
| E_NOT_OK   | Transmit cancellation request has not been accepted. |
| Functional Description   |  |
| Initiates the cancellation / suppression of the confirmation of the specified Tx-PDU.  |  |
| Particularities and Limitations  |  |
| <ul style="list-style-type: none"> <li>&gt; Service ID: see table 'Service IDs'</li> <li>&gt; This function is synchronous.</li> <li>&gt; This function is non-reentrant.</li> <li>&gt; AUTOSAR only defines a dummy function. For MICROSAR Classic this function has the functionality to cancel an ordered Tx-PDU.</li> <li>&gt; Configuration Variant(s): CANIF_CANCEL_SUPPORT_API == STD_ON</li> </ul> |  |
| Call context   |  |
| <ul style="list-style-type: none"> <li>&gt; ANY</li> </ul>   |  |

Table 4-6 CanIf\_CancelTransmit

### 4.1.7 CanIf\_SetPduMode

| Prototype  |  |
|--|--|
| Std_ReturnType <b>CanIf_SetPduMode</b> ( uint8 ControllerId, CanIf_PduSetModeType PduModeRequest )   |  |
| Parameter  |  |
| ControllerId [in]  | Abstracted CanIf ControllerId which is assigned to a CAN controller, which is requested for PDU mode transition. |
| PduModeRequest [in]  | Requested PDU mode transition.   |
| Return code  |  |
| E_OK   | The request to change the PDU mode has been accepted.  |
| E_NOT_OK   | The request to change the PDU mode has not been accepted.  |
| Functional Description   |  |
| Requests a PDU mode transition of a CAN controller.<br>Supported PDU modes:<br>CANIF_SET_OFFLINE<br>CANIF_SET_RX_OFFLINE<br>CANIF_SET_RX_ONLINE<br>CANIF_SET_TX_OFFLINE<br>CANIF_SET_TX_ONLINE<br>CANIF_SET_ONLINE<br>CANIF_SET_TX_OFFLINE_ACTIVE                                      |  |
| Particularities and Limitations  |  |
| <ul style="list-style-type: none"><li>&gt; Service ID: see table 'Service IDs'</li><li>&gt; This function is synchronous.</li><li>&gt; This function is non-reentrant.</li><li>&gt; Controller has to be in state CANIF_CS_STARTED.</li><li>&gt; Configuration Variant(s): -</li></ul> |  |
| Call context   |  |
| <ul style="list-style-type: none"><li>&gt; ANY</li></ul>   |  |

Table 4-7 CanIf\_SetPduMode

### 4.1.8 CanIf\_GetPduMode

| Prototype   |   |
|---|---|
| Std_ReturnType <b>CanIf_GetPduMode</b> ( uint8 ControllerId, CanIf_PduGetModeType *PduModePtr )   |   |
| Parameter   |   |
| ControllerId [in]   | Abstracted CanIf ControllerId which is assigned to a CAN controller, which is requested for its current PDU mode. |
| PduModePtr [out]  | Pointer to memory location, where the current PDU mode of the CAN controller will be stored.                      |
| Return codein   |   |
| E_OK  | PDU mode request has been accepted; current PDU mode is stored at PduModePtr.                                     |
| E_NOT_OK  | PDU mode request has not been accepted.   |
| Functional Description  |   |
| Returns the current PDU mode of a CAN controller.   |   |
| Particularities and Limitations   |   |
| <ul style="list-style-type: none"><li>&gt; Service ID: see table 'Service IDs'</li><li>&gt; This function is synchronous.</li><li>&gt; This function is reentrant.</li><li>&gt; Configuration Variant(s): -</li></ul> |   |
| Call context  |   |
| <ul style="list-style-type: none"><li>&gt; ANY</li></ul>  |   |

Table 4-8 CanIf\_GetPduMode

### 4.1.9 CanIf\_GetVersionInfo

| Prototype  |  |
|--|--|
| void <b>CanIf_GetVersionInfo</b> ( Std_VersionInfoType *VersionInfo )  |  |
| Parameter  |  |
| VersionInfo [out]  | Pointer to variable Pointer to memory location, where the version information of this module will be stored. |
| Return code  |  |
| -  | -  |
| Functional Description   |  |
| Returns the version information of the called CAN Interface module.<br>Version information (BCD-coded):<br>vendor ID<br>AUTOSAR module ID<br>SW version of the component   |  |
| Particularities and Limitations  |  |
| <ul style="list-style-type: none"> <li>&gt; Service ID: see table 'Service IDs'</li> <li>&gt; This function is synchronous.</li> <li>&gt; This function is reentrant</li> <li>&gt; Configuration Variant(s): CANIF_VERSION_INFO_API == STD_ON</li> </ul> |  |
| Call context   |  |
| <ul style="list-style-type: none"> <li>&gt; ANY</li> </ul>   |  |

Table 4-9 CanIf\_GetVersionInfo

#### 4.1.10 CanIf\_SetDynamicTxId

| Prototype   |   |
|---|---|
| void <b>CanIf_SetDynamicTxId</b> ( PduIdType CanTxPduId, Can_IdType CanId )   |   |
| Parameter   |   |
| CanTxPduId [in]   | Handle of Tx-PDU which CAN identifier shall be modified.    |
| CanId [in]  | CAN identifier which shall be set for the specified Tx-PDU. |
| Return code   |   |
| -   | -   |
| Functional Description  |   |
| Reconfigures the CAN identifier of the specified Tx-PDU.  |   |
| Particularities and Limitations   |   |
| <ul style="list-style-type: none"> <li>&gt; Service ID: see table 'Service IDs'</li> <li>&gt; This function is synchronous.</li> <li>&gt; This function is reentrant.</li> <li>&gt; Shall not be interrupted by a call of <code>CanIf_Transmit()</code> for the same Tx PDU.</li> <li>&gt; Configuration Variant(s): <code>CANIF_SETDYNAMICTXID_API == STD_ON</code></li> </ul> |   |
| Call context  |   |
| <ul style="list-style-type: none"> <li>&gt; ANY</li> </ul>  |   |

Table 4-10 CanIf\_SetDynamicTxId



#### 4.1.11 CanIf\_SetTrcvMode

| Prototype  |   |
|--|---|
| Std_ReturnType <b>CanIf_SetTrcvMode</b> ( uint8 TransceiverId, CanTrcv_TrvcModeType TransceiverMode )  |   |
| Parameter  |   |
| TransceiverId [in]   | Abstracted CanIf TransceiverId, which is assigned to a CAN transceiver, which is requested for mode transition. |
| TransceiverMode [in]   | Requested transceiver mode transition.  |
| Return code  |   |
| E_OK   | Transceiver mode request has been accepted.   |
| E_NOT_OK   | Transceiver mode request has not been accepted.   |
| Functional Description   |   |
| Requests a transceiver mode transition of a CAN transceiver.<br>Supported transceiver modes:<br>CANTRCV_TRCVMODE_NORMAL<br>CANTRCV_TRCVMODE_SLEEP<br>CANTRCV_TRCVMODE_STANDBY  |   |
| Particularities and Limitations  |   |
| <ul style="list-style-type: none"><li>&gt; Service ID: see table 'Service IDs'</li><li>&gt; This function is synchronous for each CAN transceiver, which is configured synchronous else asynchronous.</li><li>&gt; This function is non-reentrant</li><li>&gt; Configuration Variant(s): CANIF_TRCV_HANDLING == STD_ON</li></ul> |   |
| Call context   |   |
| <ul style="list-style-type: none"><li>&gt; TASK</li></ul>  |   |

Table 4-11 CanIf\_SetTrcvMode

#### 4.1.12 CanIf\_GetTrcvMode

| Prototype   |  |
|---|--|
| Std_ReturnType <b>CanIf_GetTrcvMode</b> ( CanTrcv_TrcvModeType *TransceiverModePtr, uint8 TransceiverId )   |  |
| Parameter   |  |
| TransceiverId [in]  | Abstracted CanIf TransceiverId, which is assigned to a CAN transceiver, which is requested for current transceiver mode. |
| TransceiverModePtr [out]  | Pointer to memory location, where the current transceiver mode of the CAN transceiver will be stored.                    |
| Return code   |  |
| E_OK  | Transceiver mode request has been accepted; current transceiver mode is stored at TransceiverModePtr.                    |
| E_NOT_OK  | Transceiver mode request has not been accepted.  |
| Functional Description  |  |
| Returns the current transceiver mode of a CAN transceiver.  |  |
| Particularities and Limitations   |  |
| <ul style="list-style-type: none"><li>&gt; Service ID: see table 'Service IDs'</li><li>&gt; This function is synchronous</li><li>&gt; This function is non-reentrant</li><li>&gt; Configuration Variant(s): CANIF_TRCV_HANDLING == STD_ON</li></ul> |  |
| Call context  |  |
| <ul style="list-style-type: none"><li>&gt; TASK</li></ul>   |  |

Table 4-12 CanIf\_GetTrcvMode

### 4.1.13 CanIf\_GetTrcvWakeupReason

| Prototype   |   |
|---|---|
| Std_ReturnType <b>CanIf_GetTrcvWakeupReason</b> ( uint8 TransceiverId,<br>CanTrcv_TrvcWakeupReasonType *TrcvWuReasonPtr )   |   |
| Parameter   |   |
| TransceiverId [in]  | Abstracted CanIf TransceiverId, which is assigned to a CAN transceiver, which is requested for wakeup reason. |
| TrcvWuReasonPtr [out]   | Pointer to memory location, where the wake-up reason of the CAN transceiver will be stored.                   |
| Return code   |   |
| E_OK  | Transceiver wakeup reason request has been accepted; wakeup reason is stored at TrcvWuReasonPtr.              |
| E_NOT_OK  | Transceiver wakeup reason request has not been accepted.  |
| Functional Description  |   |
| Returns the wakeup reason of a CAN transceiver.   |   |
| Particularities and Limitations   |   |
| <ul style="list-style-type: none"><li>&gt; Service ID: see table 'Service IDs'</li><li>&gt; This function is synchronous.</li><li>&gt; This function is non-reentrant.</li><li>&gt; Configuration Variant(s): CANIF_TRCV_HANDLING == STD_ON</li></ul> |   |
| Call context  |   |
| <ul style="list-style-type: none"><li>&gt; ANY</li></ul>  |   |

Table 4-13 CanIf\_GetTrcvWakeupReason

#### 4.1.14 CanIf\_SetTrcvWakeupMode

| Prototype   |  |
|---|--|
| Std_ReturnType <b>CanIf_SetTrcvWakeupMode</b> ( uint8 TransceiverId,<br>CanTrcv_TrcvWakeupModeType TrcvWakeupMode )   |  |
| Parameter   |  |
| TransceiverId [in]  | Abstracted CanIf TransceiverId, which is assigned to a CAN transceiver, which is requested for wakeup mode transition. |
| TrcvWakeupMode [in]   | Requested transceiver wakeup mode transition.  |
| Return code   |  |
| E_OK  | Transceiver wakeup mode request has been accepted.   |
| E_NOT_OK  | Transceiver wakeup mode request has not been accepted.   |
| Functional Description  |  |
| Requests a transceiver wakeup mode transition of a CAN transceiver.<br>Supported wakeup modes:<br>CANTRCV_WUMODE_ENABLE<br>CANTRCV_WUMODE_DISABLE<br>CANTRCV_WUMODE_CLEAR   |  |
| Particularities and Limitations   |  |
| <ul style="list-style-type: none"><li>&gt; Service ID: see table 'Service IDs'</li><li>&gt; This function is synchronous.</li><li>&gt; This function is non-reentrant.</li><li>&gt; Configuration Variant(s): CANIF_TRCV_HANDLING == STD_ON</li></ul> |  |
| Call context  |  |
| <ul style="list-style-type: none"><li>&gt; ANY</li></ul>  |  |

Table 4-14 CanIf\_SetTrcvWakeupMode

### 4.1.15 CanIf\_CheckWakeup

| Prototype  |  |
|--|--|
| Std_ReturnType <b>CanIf_CheckWakeup</b> ( EcuM_WakeupSourceType WakeupSource )   |  |
| Parameter  |  |
| WakeupSource [in]  | Source device, which initiated the wakeup event (CAN controller or CAN transceiver). |
| Return code  |  |
| E_OK   | The specified source device signals the wakeup event.                                |
| E_NOT_OK   | Check wakeup request has not been accepted.  |
| Functional Description   |  |
| Checks, whether an underlying CAN controller or CAN transceiver signals a wakeup event.  |  |
| Particularities and Limitations  |  |
| <ul style="list-style-type: none"><li>&gt; Service ID: see table 'Service IDs'</li><li>&gt; This function is synchronous.</li><li>&gt; This function is reentrant.</li><li>&gt; Configuration Variant(s): CANIF_WAKEUP_SUPPORT == STD_ON</li></ul> |  |
| Call context   |  |
| <ul style="list-style-type: none"><li>&gt; ANY</li></ul>   |  |

Table 4-15 CanIf\_CheckWakeup

#### 4.1.16 CanIf\_CheckValidation

| Prototype   |   |
|---|---|
| Std_ReturnType <b>CanIf_CheckValidation</b> ( EcuM_WakeupSourceType WakeupSource )  |   |
| Parameter   |   |
| WakeupSource [in]   | Source device which initiated the wakeup event and which has to be validated (CAN controller or CAN transceiver). |
| Return code   |   |
| E_OK  | Check validation request has been accepted.   |
| E_NOT_OK  | Check validation request has not been accepted.   |
| Functional Description  |   |
| <p>Checks if a Rx-PDU was received since the last wake-up event.</p> <p>If a Rx-PDU was received since the last wake-up event the function configured by parameter <code>CanIfDispatchUserValidateWakeupEventName</code> is called.</p> <p>If a Rx-PDU was received between the call of <code>CanIf_CheckWakeup</code> and <code>CanIf_CheckValidation</code> the configurable EcuM callback function <code>EcuM_ValidationWakeupEvent</code> is called from the context of this function.</p>  |   |
| Particularities and Limitations   |   |
| <ul style="list-style-type: none"><li>&gt; Service ID: see table 'Service IDs'</li><li>&gt; This function is synchronous.</li><li>&gt; This function is reentrant.</li><li>&gt; <code>CanIf_CheckWakeup</code> has to be called before and a wakeup event has to be detected.</li><li>&gt; CAN Interface has to be set to <code>CANIF_CS_STARTED</code> mode before a validation is possible.</li><li>&gt; Configuration Variant(s): <code>CANIF_WAKEUP_SUPPORT == STD_ON</code> and <code>CANIF_WAKEUP_VALIDATION == STD_ON</code></li></ul> |   |
| Call context  |   |
| <ul style="list-style-type: none"><li>&gt; ANY</li></ul>  |   |

Table 4-16 CanIf\_CheckValidation

#### 4.1.17 CanIf\_GetTxConfirmationState

| Prototype  |  |
|--|--|
| CanIf_NotifStatusType <b>CanIf_GetTxConfirmationState</b> ( uint8 ControllerId )   |  |
| Parameter  |  |
| ControllerId [in]  | Abstracted CanIf ControllerId which is assigned to a CAN controller, which is requested for its Tx confirmation state. |
| Return code  |  |
| CANIF_NO_NOTIFICATION  | No transmit event occurred for the requested CAN controller.   |
| CANIF_TX_RX_NOTIFICATION   | The requested CAN controller has successfully transmitted any message.   |
| Functional Description   |  |
| Reports if any TX confirmation has been done for the whole CAN controller since it's last start.   |  |
| Particularities and Limitations  |  |
| <ul style="list-style-type: none"> <li>&gt; Service ID: see table 'Service IDs'</li> <li>&gt; This function is synchronous.</li> <li>&gt; This function is reentrant.</li> <li>&gt; Configuration Variant(s): CANIF_PUBLIC_TX_CONFIRM_POLLING_SUPPORT == STD_ON</li> </ul> |  |
| Call context   |  |
| <ul style="list-style-type: none"> <li>&gt; ANY</li> </ul>   |  |

Table 4-17 CanIf\_GetTxConfirmationState

#### 4.1.18 CanIf\_ClearTrcvWufFlag

| Prototype   |   |
|---|---|
| Std_ReturnType <b>CanIf_ClearTrcvWufFlag</b> ( uint8 TransceiverId )  |   |
| Parameter   |   |
| TransceiverId [in]  | Abstracted CanIf TransceiverId, which is assigned to a CAN transceiver, which is requested to clear its WUF flag. |
| Return code   |   |
| E_OK  | Clear WUF flag request has been accepted.   |
| E_NOT_OK  | Clear WUF flag request has not been accepted.   |
| Functional Description  |   |
| Requests a CAN transceiver to clear its WUF flag.   |   |
| Particularities and Limitations   |   |
| <ul style="list-style-type: none"><li>&gt; Service ID: see table 'Service IDs'</li><li>&gt; This function is synchronous for each CAN transceiver which is configured synchronous else asynchronous.</li><li>&gt; This function is reentrant.</li><li>&gt; Configuration Variant(s): CANIF_TRCV_HANDLING == STD_ON and CANIF_PN_TRCV_HANDLING == STD_ON</li></ul> |   |
| Call context  |   |
| <ul style="list-style-type: none"><li>&gt; ANY</li></ul>  |   |

Table 4-18 CanIf\_ClearTrcvWufFlag



#### 4.1.19 CanIf\_CheckTrcvWakeFlag

| Prototype   |  |
|---|--|
| Std_ReturnType <b>CanIf_CheckTrcvWakeFlag</b> ( uint8 TransceiverId )   |  |
| Parameter   |  |
| TransceiverId [in]  | Abstracted CanIf TransceiverId, which is assigned to a CAN transceiver, which is requested to check its Wake flag. |
| Return code   |  |
| E_OK  | Check Wake flag request has been accepted.   |
| E_NOT_OK  | Check Wake flag request has not been accepted.   |
| Functional Description  |  |
| Requests a CAN transceiver to check for Wake flag.  |  |
| Particularities and Limitations   |  |
| <ul style="list-style-type: none"><li>&gt; Service ID: see table 'Service IDs'</li><li>&gt; This function is synchronous for each CAN transceiver which is configured synchronous else asynchronous.</li><li>&gt; This function is reentrant.</li><li>&gt; Configuration Variant(s): CANIF_TRCV_HANDLING == STD_ON and CANIF_PN_TRCV_HANDLING == STD_ON</li></ul> |  |
| Call context  |  |
| <ul style="list-style-type: none"><li>&gt; ANY</li></ul>  |  |

Table 4-19 CanIf\_CheckTrcvWakeFlag

#### 4.1.20 CanIf\_SetBaudrate

| Prototype   |   |
|---|---|
| Std_ReturnType <b>CanIf_SetBaudrate</b> ( uint8 ControllerId,<br>uint16 BaudRateConfigID )  |   |
| Parameter   |   |
| ControllerId [in]   | Abstract CanIf ControllerId which is assigned to a CAN controller, whose baudrate shall be set. |
| BaudRateConfigID [in]   | References a baudrate configuration by ID.  |
| Return code   |   |
| E_OK  | Set baudrate request has been accepted. Baudrate change started.                                |
| E_NOT_OK  | Set baudrate request has not been accepted.   |
| Functional Description  |   |
| Requests to set the baudrate configuration of the specified CAN controller.   |   |
| Particularities and Limitations   |   |
| <ul style="list-style-type: none"><li>&gt; Service ID: see table 'Service IDs'</li><li>&gt; This function is synchronous.</li><li>&gt; This function is non-reentrant</li><li>&gt; Configuration Variant(s): CANIF_SET_BAUDRATE_API == STD_ON</li></ul> |   |
| Call context  |   |
| <ul style="list-style-type: none"><li>&gt; ANY</li></ul>  |   |

Table 4-20 CanIf\_SetBaudrate

### 4.1.21 CanIf\_ChangeBaudrate

| Prototype  |   |
|--|---|
| Std_ReturnType <b>CanIf_ChangeBaudrate</b> ( uint8 ControllerId,<br>const uint16 Baudrate )  |   |
| Parameter  |   |
| ControllerId [in]  | Abstract CanIf ControllerId which is assigned to a CAN controller, whose baudrate shall be set. |
| Baudrate [in]  | Requested baudrate [kbps].  |
| Return code  |   |
| E_OK   | Change baudrate request has been accepted. Baudrate change started.                             |
| E_NOT_OK   | Change baudrate request has not been accepted.  |
| Functional Description   |   |
| Requests to change the baudrate of the specified CAN controller.<br>If possible please use the API CanIf_SetBaudrate() instead of this one.  |   |
| Particularities and Limitations  |   |
| <ul style="list-style-type: none"> <li>&gt; Service ID: see table 'Service IDs'</li> <li>&gt; This function is synchronous.</li> <li>&gt; This function is non-reentrant.</li> <li>&gt; Configuration Variant(s): CANIF_CHANGE_BAUDRATE_SUPPORT == STD_ON</li> </ul> |   |
| Call context   |   |
| <ul style="list-style-type: none"> <li>&gt; ANY</li> </ul>   |   |

Table 4-21 CanIf\_ChangeBaudrate

### 4.1.22 CanIf\_CheckBaudrate

| Prototype   |   |
|---|---|
| Std_ReturnType <b>CanIf_CheckBaudrate</b> ( uint8 ControllerId,<br>const uint16 Baudrate )  |   |
| Parameter   |   |
| ControllerId [in]   | Abstract CanIf ControllerId which is assigned to a CAN controller, whose baudrate support shall be checked. |
| Baudrate [in]   | Baudrate to check [kbps].   |
| Return code   |   |
| E_OK  | Baudrate is supported by the CAN controller.  |
| E_NOT_OK  | Baudrate is not supported / invalid by the CAN controller.  |
| Functional Description  |   |
| Checks if a CAN controller supports the specified baudrate.   |   |
| Particularities and Limitations   |   |
| <ul style="list-style-type: none"><li>&gt; Service ID: see table 'Service IDs'</li><li>&gt; This function is synchronous.</li><li>&gt; This function is non-reentrant.</li><li>&gt; Configuration Variant(s): CANIF_CHANGE_BAUDRATE_SUPPORT == STD_ON</li></ul> |   |
| Call context  |   |
| <ul style="list-style-type: none"><li>&gt; ANY</li></ul>  |   |

Table 4-22 CanIf\_CheckBaudrate

### 4.1.23 CanIf\_SetAddressTableEntry

| Prototype   |   |
|---|---|
| <pre>void CanIf_SetAddressTableEntry ( uint8 ControllerId, uint8 intAddr, uint8 busAddr )</pre>   |   |
| Parameter   |   |
| ControllerId [in]   | Abstract CanIf ControllerId which is assigned to a CAN controller, at which a J1939 address shall be set. |
| intAddr [in]  | J1939 internal address.   |
| busAddr [in]  | J1939 bus address.  |
| Return code   |   |
| -   | -   |
| Functional Description  |   |
| Sets up one relation between internal and external address. Only used in J1939 environment.   |   |
| Particularities and Limitations   |   |
| <ul style="list-style-type: none"><li>&gt; Service ID: see table 'Service IDs'</li><li>&gt; This function is synchronous.</li><li>&gt; This function is non-reentrant.</li><li>&gt; Configuration Variant(s): CANIF_J1939_DYN_ADDR_SUPPORT != CANIF_J1939_DYN_ADDR_DISABLED</li></ul> |   |
| Call context  |   |
| <ul style="list-style-type: none"><li>&gt; ANY</li></ul>  |   |

Table 4-23 CanIf\_SetAddressTableEntry

#### 4.1.24 CanIf\_ResetAddressTableEntry

| Prototype   |   |
|---|---|
| void <b>CanIf_ResetAddressTableEntry</b> ( uint8 ControllerId, uint8 intAddr )  |   |
| Parameter   |   |
| ControllerId [in]   | Abstract CanIf ControllerId which is assigned to a CAN controller, at which a J1939 address shall be reset. |
| intAddr [in]  | J1939 internal address.   |
| Return code   |   |
| -   | -   |
| Functional Description  |   |
| Resets one relation between internal and external address. Only used in J1939 environment.  |   |
| Particularities and Limitations   |   |
| <ul style="list-style-type: none"><li>&gt; Service ID: see table 'Service IDs'</li><li>&gt; This function is synchronous.</li><li>&gt; This function is non-reentrant.</li><li>&gt; Configuration Variant(s): CANIF_J1939_DYN_ADDR_SUPPORT != CANIF_J1939_DYN_ADDR_DISABLED</li></ul> |   |
| Call context  |   |
| <ul style="list-style-type: none"><li>&gt; ANY</li></ul>  |   |

Table 4-24 CanIf\_ResetAddressTableEntry

#### 4.1.25 CanIf\_RamCheckExecute

| Prototype  |   |
|--|---|
| void <b>CanIf_RamCheckExecute</b> ( uint8 ControllerId )   |   |
| Parameter  |   |
| ControllerId [in]  | Abstract CanIf ControllerId which is assigned to a CAN controller, for which the RAM-check shall be executed. |
| Return code  |   |
| -  | -   |
| Functional Description   |   |
| Requests the specified CAN controller to execute the RAM check of its CAN controller HW-registers.   |   |
| Particularities and Limitations  |   |
| <ul style="list-style-type: none"><li>&gt; Service ID: see table 'Service IDs'</li><li>&gt; This function is synchronous.</li><li>&gt; This function is non-reentrant.</li><li>&gt; Configuration Variant(s): CANIF_EXTENDED_RAM_CHECK_SUPPORT == STD_ON</li></ul> |   |
| Call context   |   |
| <ul style="list-style-type: none"><li>&gt; ANY</li></ul>   |   |

Table 4-25 CanIf\_RamCheckExecute

#### 4.1.26 CanIf\_RamCheckEnableMailbox

| Prototype  |  |
|--|--|
| void <b>CanIf_RamCheckEnableMailbox</b> ( uint8 ControllerId, CanIf_HwHandleType HwHandle )  |  |
| Parameter  |  |
| ControllerId [in]  | Abstract CanIf ControllerId which is assigned to a CAN controller, for which the mailbox shall be enabled. |
| HwHandle [in]  | Handle of the mailbox, which shall be enabled.   |
| Return code  |  |
| -  | -  |
| Functional Description   |  |
| Reactivates the specified mailbox from a CAN controller after it was deactivated by RAM check.   |  |
| Particularities and Limitations  |  |
| <ul style="list-style-type: none"><li>&gt; Service ID: see table 'Service IDs'</li><li>&gt; This function is synchronous.</li><li>&gt; This function is non-reentrant.</li><li>&gt; Configuration Variant(s): CANIF_EXTENDED_RAM_CHECK_SUPPORT == STD_ON</li></ul> |  |
| Call context   |  |
| <ul style="list-style-type: none"><li>&gt; ANY</li></ul>   |  |

Table 4-26 CanIf\_RamCheckEnableMailbox



## 4.1.27 CanIf\_RamCheckEnableController

| Prototype   |  |
|---|--|
| void <b>CanIf_RamCheckEnableController</b> ( uint8 ControllerId )   |  |
| Parameter   |  |
| ControllerId [in]   | Abstract CanIf ControllerId which is assigned to a CAN controller, which shall be enabled. |
| Return code   |  |
| -   | -  |
| Functional Description  |  |
| Reactivates a CAN controller after it was deactivated by RAM check.   |  |
| Particularities and Limitations   |  |
| <ul style="list-style-type: none"> <li>&gt; Service ID: see table 'Service IDs'</li> <li>&gt; This function is synchronous.</li> <li>&gt; This function is non-reentrant.</li> <li>&gt; Configuration Variant(s): CANIF_EXTENDED_RAM_CHECK_SUPPORT == STD_ON</li> </ul> |  |
| Call context  |  |
| <ul style="list-style-type: none"> <li>&gt; ANY</li> </ul>  |  |

Table 4-27 CanIf\_RamCheckEnableController

## 4.1.28 CanIf\_SetPduReceptionMode

| Prototype  |  |
|--|--|
| Std_ReturnType <b>CanIf_SetPduReceptionMode</b> ( PduIdType id, CanIf_ReceptionModeType mode )   |  |
| Parameter  |  |
| id [in]  | The handle of Rx-PDU whose reception mode shall be changed.  |
| mode [in]  | <p>The reception mode which shall be set. Following reception modes are possible:</p> <ul style="list-style-type: none"> <li>&gt; CANIF_RMT_IGNORE_CONTINUE: In case of a match the received Rx-PDU is not forwarded to configured upper layer and the search for a potential match continues.</li> <li>&gt; CANIF_RMT_RECEIVE_STOP: In case of a match the received Rx-PDU is forwarded to configured upper layer.</li> </ul> |
| Return code  |  |
| E_OK   | Set PDU reception mode request has been accepted. PDU reception mode was changed.  |
| E_NOT_OK   | Set PDU reception mode request has not been accepted. PDU reception mode was not changed.  |
| Functional Description   |  |
| <p>Sets the reception mode of a Rx-PDU.</p> <p>With this API the upper layer may influence on which PDU ID a CAN ID is received, respective if a CAN ID is received at all.</p> <p>During the initialization the reception mode of all affected Rx-PDUs is set to CANIF_RMT_RECEIVE_STOP.</p>        |  |
| Particularities and Limitations  |  |
| <ul style="list-style-type: none"> <li>&gt; Service ID: see table 'Service IDs'</li> <li>&gt; This function is synchronous.</li> <li>&gt; This function is reentrant for different Rx-PDU handles.</li> <li>&gt; Configuration Variant(s): CANIF_SET_PDU_RECEPTION_MODE_SUPPORT == STD_ON</li> </ul> |  |
| Call context   |  |
| <ul style="list-style-type: none"> <li>&gt; ANY</li> </ul>   |  |

Table 4-28 CanIf\_SetPduReceptionMode

### 4.1.29 CanIf\_GetControllerErrorState

| Prototype   |   |
|---|---|
| Std_ReturnType <b>CanIf_GetControllerErrorState</b> ( uint8 ControllerId,<br>Can_ErrorStateType *ErrorStatePtr )  |   |
| Parameter   |   |
| ControllerId [in]   | Abstracted CanIf ControllerId which is assigned to a CAN controller, from which the error state is requested. |
| ErrorStatePtr [out]   | Pointer to a memory location, where the error state of the CAN controller will be stored.                     |
| Return code   |   |
| E_OK  | Error state request has been accepted; current error state is stored at ErrorStatePtr.                        |
| E_NOT_OK  | Error state request has not been accepted.  |
| Functional Description  |   |
| Returns the current error state of a CAN controller.  |   |
| Particularities and Limitations   |   |
| <ul style="list-style-type: none"><li>&gt; Service ID: see table 'Service IDs'</li><li>&gt; This function is synchronous.</li><li>&gt; This function is reentrant (only for different ControllerId).</li><li>&gt; Configuration Variant(s): CANIF_BUS_MIRRORING_SUPPORT == STD_ON</li></ul> |   |
| Call context  |   |
| <ul style="list-style-type: none"><li>&gt; ANY</li></ul>  |   |

Table 4-29 CanIf\_GetControllerErrorState

### 4.1.30 CanIf\_GetControllerRxErrorCounter

| Prototype   |  |
|---|--|
| Std_ReturnType <b>CanIf_GetControllerRxErrorCounter</b> ( uint8 ControllerId, uint8 *RxErrorCounterPtr )  |  |
| Parameter   |  |
| ControllerId [in]   | Abstracted CanIf ControllerId which is assigned to a CAN controller, from which the Rx error counter is requested. |
| RxErrorCounterPtr [out]   | Pointer to a memory location, where the current Rx error counter of the CAN controller will be stored.             |
| Return code   |  |
| E_OK  | Rx error counter request has been accepted; current Rx error counter is stored at RxErrorCounterPtr.               |
| E_NOT_OK  | Rx error counter request has not been accepted.  |
| Functional Description  |  |
| Returns the current Rx error counter of a CAN controller.   |  |
| Particularities and Limitations   |  |
| <ul style="list-style-type: none"><li>&gt; Service ID: see table 'Service IDs'</li><li>&gt; This function is synchronous.</li><li>&gt; This function is reentrant (only for different ControllerId).</li><li>&gt; Configuration Variant(s): CANIF_BUS_MIRRORING_SUPPORT == STD_ON</li></ul> |  |
| Call context  |  |
| <ul style="list-style-type: none"><li>&gt; ANY</li></ul>  |  |

Table 4-30 CanIf\_GetControllerRxErrorCounter

### 4.1.31 CanIf\_GetControllerTxErrorCounter

| Prototype   |  |
|---|--|
| Std_ReturnType <b>CanIf_GetControllerTxErrorCounter</b> ( uint8 ControllerId, uint8 *TxErrorCounterPtr )  |  |
| Parameter   |  |
| ControllerId [in]   | Abstracted CanIf ControllerId which is assigned to a CAN controller, from which the Tx error counter is requested. |
| TxErrorCounterPtr [out]   | Pointer to a memory location, where the current Tx error counter of the CAN controller will be stored.             |
| Return code   |  |
| E_OK  | Tx error counter request has been accepted; current Tx error counter is stored at TxErrorCounterPtr.               |
| E_NOT_OK  | Tx error counter request has not been accepted.  |
| Functional Description  |  |
| Returns the current Tx error counter of a CAN controller.   |  |
| Particularities and Limitations   |  |
| <ul style="list-style-type: none"><li>&gt; Service ID: see table 'Service IDs'</li><li>&gt; This function is synchronous.</li><li>&gt; This function is reentrant (only for different ControllerId).</li><li>&gt; Configuration Variant(s): CANIF_BUS_MIRRORING_SUPPORT == STD_ON</li></ul> |  |
| Call context  |  |
| <ul style="list-style-type: none"><li>&gt; ANY</li></ul>  |  |

Table 4-31 CanIf\_GetControllerTxErrorCounter

### 4.1.32 CanIf\_EnableBusMirroring

| Prototype   |  |
|---|--|
| Std_ReturnType <b>CanIf_EnableBusMirroring</b> ( uint8 ControllerId, boolean MirroringActive )  |  |
| Parameter   |  |
| ControllerId [in]   | Abstracted CanIf ControllerId which is assigned to a CAN controller, for which mirroring shall be enabled or disabled.   |
| MirroringActive [in]  | TRUE: Mirroring will be enabled to report each successful received or transmitted CAN frame on the given CAN controller to the Mirror module.<br>FALSE: Mirroring will be disabled to not report received or transmitted CAN frame on the given CAN controller to the Mirror module. |
| Return code   |  |
| E_OK  | Mirroring change request has been accepted; mirroring was changed for the given CAN controller.  |
| E_NOT_OK  | Mirroring change request has not been accepted; mirroring was not changed for the given CAN controller.  |
| Functional Description  |  |
| Enables or disables mirroring for a CAN controller.<br>During the initialization mirroring of all configured CAN controller is set to disabled.   |  |
| Particularities and Limitations   |  |
| <ul style="list-style-type: none"><li>&gt; Service ID: see table 'Service IDs'</li><li>&gt; This function is synchronous.</li><li>&gt; This function is reentrant.</li><li>&gt; Configuration Variant(s): CANIF_BUS_MIRRORING_SUPPORT == STD_ON</li></ul> |  |
| Call context  |  |
| <ul style="list-style-type: none"><li>&gt; ANY</li></ul>  |  |

Table 4-32 CanIf\_EnableBusMirroring

## 4.2 Services used by CAN Interface

In the following table services provided by other components, which are used by the CAN Interface are listed. For details about prototype and functionality refer to the documentation of the providing component.

| Component | API  |
|-----------|--|
| Appl      | <ul style="list-style-type: none"> <li>- User_RxIndication (*)</li> <li>- User_TxConfirmation (*)</li> </ul>   |
| Can       | <ul style="list-style-type: none"> <li>- Can_SetControllerMode</li> <li>- Can_Write</li> <li>- Can_CancelTx</li> <li>- Can_CheckWakeup</li> <li>- Can_CheckBaudrate</li> <li>- Can_ChangeBaudrate</li> <li>- Can_SetBaudrate</li> <li>- Can_RamCheckExecute</li> <li>- Can_RamCheckEnableMailbox</li> <li>- Can_RamCheckEnableController</li> <li>- Can_GetControllerErrorState</li> <li>- Can_GetControllerRxErrorCounter</li> <li>- Can_GetControllerTxErrorCounter</li> </ul> |
| CanNm     | <ul style="list-style-type: none"> <li>- CanNm_RxIndication</li> <li>- CanNm_TxConfirmation</li> </ul>   |
| CanSm     | <ul style="list-style-type: none"> <li>- CanSM_CheckTransceiverWakeFlagIndication</li> <li>- CanSM_ClearTrcvWufFlagIndication</li> <li>- CanSM_ConfirmPnAvailability</li> <li>- CanSM_ControllerBusOff</li> <li>- CanSM_ControllerModeIndication</li> <li>- CanSM_TransceiverModeIndication</li> <li>- CanSM_RamCheckCorruptController</li> <li>- CanSM_RamCheckCorruptMailbox</li> </ul>  |
| CanTp     | <ul style="list-style-type: none"> <li>- CanTp_RxIndication</li> <li>- CanTp_TxConfirmation</li> </ul>   |
| CanTSyn   | <ul style="list-style-type: none"> <li>- CanTSyn_RxIndication</li> <li>- CanTSyn_TxConfirmation</li> </ul>   |
| CanTrcv   | <ul style="list-style-type: none"> <li>- CanTrcv_SetOpMode</li> <li>- CanTrcv_GetOpMode</li> <li>- CanTrcv_SetWakeupMode</li> <li>- CanTrcv_CheckWakeup</li> <li>- CanTrcv_GetBusWuReason</li> </ul>   |
| CCP       | <ul style="list-style-type: none"> <li>- Ccp_RxIndication</li> <li>- Ccp_TxConfirmation</li> </ul>   |

| Component | API  |
|-----------|--|
| CDD       | <ul style="list-style-type: none"> <li>- My_DataChecksumRxErrFct (*)</li> <li>- User_CheckTransceiverWakeFlagIndication (*)</li> <li>- User_ClearTrcvWufFlagIndication (*)</li> <li>- User_ConfirmPnAvailability (*)</li> <li>- User_ControllerBusOff (*)</li> <li>- User_ControllerModeIndication (*)</li> <li>- User_RamCheckCorruptController (*)</li> <li>- User_RamCheckCorruptMailbox (*)</li> <li>- User_TransceiverModeIndication (*)</li> <li>- User_ValidateWakeupEvent (*)</li> <li>- User_RxIndication (*)</li> <li>- User_TxConfirmation (*)</li> </ul> |
| Det       | <ul style="list-style-type: none"> <li>- Det_ReportError</li> </ul>  |
| EcuM      | <ul style="list-style-type: none"> <li>- EcuM_ValidateWakeupEvent</li> <li>- EcuM_BswErrorHook</li> </ul>  |
| IdsM      | <ul style="list-style-type: none"> <li>- IdsM_SetSecurityEventWithContextData</li> </ul>   |
| J1939Nm   | <ul style="list-style-type: none"> <li>- J1939Nm_RxIndication</li> <li>- J1939Nm_TxConfirmation</li> </ul>   |
| J1939Tp   | <ul style="list-style-type: none"> <li>- J1939Tp_RxIndication</li> <li>- J1939Tp_TxConfirmation</li> </ul>   |
| Mirror    | <ul style="list-style-type: none"> <li>- Mirror_ReportCanFrame</li> </ul>  |
| PduR      | <ul style="list-style-type: none"> <li>- PduR_CanIfRxIndication</li> <li>- PduR_CanIfTxConfirmation</li> </ul>   |
| SchM      | <ul style="list-style-type: none"> <li>- SchM_Enter_CanIf_&lt;ExclusiveArea&gt;</li> <li>- SchM_Exit_CanIf_&lt;ExclusiveArea&gt;</li> </ul>  |
| VStdLib   | <ul style="list-style-type: none"> <li>- VStdLib_MemCpy</li> <li>- VStdLib_GetHighestBitPosOne8</li> <li>- VStdLib_GetHighestBitPosOne16</li> <li>- VStdLib_GetHighestBitPosOne32</li> <li>- VStdLib_GetHighestBitPosOne64</li> </ul>  |
| Xcp       | <ul style="list-style-type: none"> <li>- Xcp_CanIfRxIndication</li> <li>- Xcp_CanIfTxConfirmation</li> </ul>   |

Table 4-33 Services used by the CAN Interface

\* Names of the call back functions can be configured freely.



## 4.3 Callback Functions

This chapter describes the callback functions that are implemented by the CAN Interface and can be invoked by other modules. The prototypes of the callback functions are provided in the header files `CanIf_Cbk.h` and `CanIf.h` by the CAN Interface.

### 4.3.1 CanIf\_TxConfirmation

| Prototype  |   |
|--|---|
| <code>void CanIf_TxConfirmation ( PduIdType CanTxPduId )</code>  |   |
| Parameter  |   |
| CanTxPduId [in]  | Handle of the Tx-PDU which is successfully transmitted. |
| Return code  |   |
| -  | -   |
| Functional Description   |   |
| Called by the CAN Driver to notify the CAN Interface about the successful transmission of the specified Tx-PDU.  |   |
| Particularities and Limitations  |   |
| <ul style="list-style-type: none"> <li>&gt; Service ID: see table 'Service IDs'</li> <li>&gt; This function is synchronous.</li> <li>&gt; This function is reentrant.</li> <li>&gt; Configuration Variant(s): -</li> </ul> |   |
| Call context   |   |
| <ul style="list-style-type: none"> <li>&gt; ANY</li> </ul>   |   |

Table 4-34 CanIf\_TxConfirmation

### 4.3.2 CanIf\_RxIndication

| Prototype  |   |
|--|---|
| <pre>void <b>CanIf_RxIndication</b> ( CanIf_HwHandleType Hrh, Can_IdType CanId, uint8 CanDlc, const uint8 *CanSduPtr )</pre>   |   |
| Parameter  |   |
| Hrh [in]   | Hardware handle where the Rx-PDU was received in. |
| CanId [in]   | CAN identifier of the received Rx-PDU.            |
| CanDlc [in]  | Data length of the received Rx-PDU.               |
| CanSduPtr [in]   | Pointer to the data of the received Rx-PDU.       |
| Return code  |   |
| -  | -   |
| Functional Description   |   |
| <p>Called by the CAN Driver to notify the CAN Interface about the reception of the specified Rx-PDU.</p> <p>This function searches whether the received PDU matches one of the configured ones. If yes, then the configured upper layer is notified.</p>   |   |
| Particularities and Limitations  |   |
| <ul style="list-style-type: none"> <li>&gt; Service ID: see table 'Service IDs'</li> <li>&gt; This function is synchronous.</li> <li>&gt; This function is reentrant.</li> <li>&gt; The signature of the <code>CanIf_RxIndication()</code> API is according to AUTOSAR Standard 4.0.3. A suitable wrapper is generated to <code>CanIf_Cfg.h</code>, if you are using a CAN-Driver which is implemented to AUTOSAR Standard 4.2.2.</li> <li>&gt; Configuration Variant(s): -</li> </ul> |   |
| Call context   |   |
| <ul style="list-style-type: none"> <li>&gt; ANY</li> </ul>   |   |

Table 4-35 CanIf\_RxIndication

### 4.3.3 CanIf\_CancelTxConfirmation

| Prototype   |   |
|---|---|
| <pre>void CanIf_CancelTxConfirmation ( PduIdType CanTxPduId, const Can_PduType *PduInfoPtr )</pre>  |   |
| Parameter   |   |
| CanTxPduId [in]   | Handle of the Tx-PDU which was cancelled.     |
| PduInfoPtr [in]   | Pointer to parameters of the canceled Tx-PDU. |
| Return code   |   |
| -   | -   |
| Functional Description  |   |
| Called by the CAN Driver to notify the CAN Interface about the transmission cancellation of the specified Tx-PDU. The specified Tx-PDU is re-queued in a transmit-buffer.   |   |
| Particularities and Limitations   |   |
| <ul style="list-style-type: none"><li>&gt; Service ID: see table 'Service IDs'</li><li>&gt; This function is synchronous.</li><li>&gt; This function is reentrant.</li><li>&gt; Configuration Variant(s): CANIF_TRANSMIT_BUFFER == STD_ON and CANIF_TRANSMIT_CANCELLATION == STD_ON</li></ul> |   |
| Call context  |   |
| <ul style="list-style-type: none"><li>&gt; ANY</li></ul>  |   |

Table 4-36 CanIf\_CancelTxConfirmation

#### 4.3.4 CanIf\_ControllerBusOff

| Prototype  |  |
|--|--|
| void <b>CanIf_ControllerBusOff</b> ( uint8 ControllerId )  |  |
| Parameter  |  |
| ControllerId [in]  | Abstracted CanIf ControllerId which is assigned to a CAN controller, at which the BusOff-event occurred. |
| Return code  |  |
| -  | -  |
| Functional Description   |  |
| Called by the CAN Driver to notify the CAN Interface about an occurred BusOff-event at the specified CAN controller.   |  |
| Particularities and Limitations  |  |
| <ul style="list-style-type: none"> <li>&gt; Service ID: see table 'Service IDs'</li> <li>&gt; This function is synchronous.</li> <li>&gt; This function is reentrant.</li> <li>&gt; Configuration Variant(s): -</li> </ul> |  |
| Call context   |  |
| <ul style="list-style-type: none"> <li>&gt; ANY</li> </ul>   |  |

Table 4-37 CanIf\_ControllerBusOff

### 4.3.5 CanIf\_CancelTxNotification

| Prototype   |   |
|---|---|
| void <b>CanIf_CancelTxNotification</b> ( PduIdType PduId, CanIf_CancelResultType IsCancelled )  |   |
| Parameter   |   |
| PduId [in]  | Handle of the Tx-PDU which was cancelled. |
| IsCancelled [in]  | Parameter currently not evaluated.        |
| Return code   |   |
| -   | -   |
| Functional Description  |   |
| <p>Called by the CAN Driver to notify the CAN Interface about the transmission cancelation of the specified Tx-PDU. The specified Tx-PDU is not confirmed to the configured upper layer. The next Tx-PDU from the transmit-buffer is transmitted.</p> <p>Used for trigger-purpose to fill the free HW-object, after calling of <code>CanIf_CancelTransmit()</code>.</p> |   |
| Particularities and Limitations   |   |
| <ul style="list-style-type: none"><li>&gt; Service ID: see table 'Service IDs'</li><li>&gt; This function is synchronous.</li><li>&gt; This function is reentrant.</li><li>&gt; Configuration Variant(s): <code>CANIF_CANCEL_SUPPORT_API == STD_ON</code></li><li>&gt; None AUTOSAR API</li></ul>   |   |
| Call context  |   |
| <ul style="list-style-type: none"><li>&gt; ANY</li></ul>  |   |

Table 4-38 CanIf\_CancelTxNotification

### 4.3.6 CanIf\_TrcvModeIndication

| Prototype   |   |
|---|---|
| <pre>void <b>CanIf_TrcvModeIndication</b> ( uint8 TransceiverId, CanTrcv_TrcvModeType<br/>TransceiverMode )</pre>   |   |
| Parameter   |   |
| TransceiverId [in]  | Abstracted CanIf TransceiverId which is assigned to a CAN transceiver, which controller mode has been transitioned. |
| TransceiverMode [in]  | Transceiver mode to which the CAN transceiver transitioned.   |
| Return code   |   |
| -   | -   |
| Functional Description  |   |
| Called by the CAN Transceiver Driver to notify CAN Interface about a successful transceiver mode transition at the specified CAN transceiver.   |   |
| Particularities and Limitations   |   |
| <ul style="list-style-type: none"><li>&gt; Service ID: see table 'Service IDs'</li><li>&gt; This function is synchronous.</li><li>&gt; This function is reentrant.</li><li>&gt; Configuration Variant(s): CANIF_TRCV_HANDLING == STD_ON</li></ul> |   |
| Call context  |   |
| <ul style="list-style-type: none"><li>&gt; ANY</li></ul>  |   |

Table 4-39 CanIf\_TrcvModeIndication

### 4.3.7 CanIf\_ControllerModeIndication

| Prototype  |   |
|--|---|
| <pre>void <b>CanIf_ControllerModeIndication</b> ( uint8 ControllerId, CanIf_ControllerModeType ControllerMode )</pre>  |   |
| Parameter  |   |
| ControllerId [in]  | Abstracted CanIf ControllerId which is assigned to a CAN controller, which controller mode has been transitioned. |
| ControllerMode [in]  | Controller mode to which the CAN controller transitioned.   |
| Return code  |   |
| -  | -   |
| Functional Description   |   |
| Called by the CAN Driver to notify CAN Interface about a successful controller mode transition at the specified CAN controller.  |   |
| Particularities and Limitations  |   |
| <ul style="list-style-type: none"> <li>&gt; Service ID: see table 'Service IDs'</li> <li>&gt; This function is synchronous.</li> <li>&gt; This function is reentrant only for different CAN controllers (ControllerId).</li> <li>&gt; Configuration Variant(s): -</li> </ul> |   |
| Call context   |   |
| <ul style="list-style-type: none"> <li>&gt; ANY</li> </ul>   |   |

Table 4-40 CanIf\_ControllerModeIndication

### 4.3.8 CanIf\_ConfirmPnAvailability

| Prototype  |   |
|--|---|
| void <b>CanIf_ConfirmPnAvailability</b> ( uint8 TransceiverId )  |   |
| Parameter  |   |
| TransceiverId [in]   | Abstracted CanIf TransceiverId which is assigned to a CAN transceiver, which has confirmed the PN availability. |
| Return code  |   |
| -  | -   |
| Functional Description   |   |
| Called by the CAN Transceiver Driver to notify CAN Interface that the specified CAN transceiver is running in PN communication mode.   |   |
| Particularities and Limitations  |   |
| <ul style="list-style-type: none"><li>&gt; Service ID: see table 'Service IDs'</li><li>&gt; This function is synchronous.</li><li>&gt; This function is reentrant.</li><li>&gt; Configuration Variant(s): CANIF_TRCV_HANDLING == STD_ON and CANIF_PN_TRCV_HANDLING == STD_ON</li></ul> |   |
| Call context   |   |
| <ul style="list-style-type: none"><li>&gt; ANY</li></ul>   |   |

Table 4-41 CanIf\_ConfirmPnAvailability



### 4.3.9 CanIf\_ClearTrcvWufFlagIndication

| Prototype  |  |
|--|--|
| void <b>CanIf_ClearTrcvWufFlagIndication</b> ( uint8 TransceiverId )   |  |
| Parameter  |  |
| TransceiverId [in]   | Abstracted CanIf TransceiverId which is assigned to a CAN transceiver, which WUF flag was cleared. |
| Return code  |  |
| -  | -  |
| Functional Description   |  |
| Called by the CAN Transceiver Driver to notify CAN Interface that the specified CAN transceiver has cleared the WUF flag.  |  |
| Particularities and Limitations  |  |
| <ul style="list-style-type: none"><li>&gt; Service ID: see table 'Service IDs'</li><li>&gt; This function is synchronous.</li><li>&gt; This function is reentrant.</li><li>&gt; Configuration Variant(s): CANIF_TRCV_HANDLING == STD_ON and CANIF_PN_TRCV_HANDLING == STD_ON</li></ul> |  |
| Call context   |  |
| <ul style="list-style-type: none"><li>&gt; ANY</li></ul>   |  |

Table 4-42 CanIf\_ClearTrcvWufFlagIndication

#### 4.3.10 CanIf\_CheckTrcvWakeFlagIndication

| Prototype  |  |
|--|--|
| void <b>CanIf_CheckTrcvWakeFlagIndication</b> ( uint8 TransceiverId )  |  |
| Parameter  |  |
| TransceiverId [in]   | Abstracted CanIf TransceiverId which is assigned to a CAN transceiver, which has detected a wake-up. |
| Return code  |  |
| -  | -  |
| Functional Description   |  |
| Called by the CAN Transceiver Driver to notify CAN Interface that the specified CAN transceiver has finished the check of its wakeup events.   |  |
| Particularities and Limitations  |  |
| <ul style="list-style-type: none"><li>&gt; Service ID: see table 'Service IDs'</li><li>&gt; This function is synchronous.</li><li>&gt; This function is reentrant.</li><li>&gt; Configuration Variant(s): CANIF_TRCV_HANDLING == STD_ON and CANIF_PN_TRCV_HANDLING == STD_ON</li></ul> |  |
| Call context   |  |
| <ul style="list-style-type: none"><li>&gt; ANY</li></ul>   |  |

Table 4-43 CanIf\_CheckTrcvWakeFlagIndication

### 4.3.11 CanIf\_RamCheckCorruptMailbox

| Prototype  |  |
|--|--|
| void <b>CanIf_RamCheckCorruptMailbox</b> ( uint8 ControllerId, CanIf_HwHandleType HwHandle )   |  |
| Parameter  |  |
| ControllerId [in]  | Abstracted CanIf ControllerId which is assigned to a CAN controller, with the corrupt mailbox. |
| HwHandle [in]  | Handle of the corrupt mailbox.   |
| Return code  |  |
| -  | -  |
| Functional Description   |  |
| Called by the CAN Driver to notify CAN Interface that the specified mailbox is corrupt. The specified corrupt mailbox will be notified to the application.   |  |
| Particularities and Limitations  |  |
| <ul style="list-style-type: none"><li>&gt; Service ID: see table 'Service IDs'</li><li>&gt; This function is synchronous.</li><li>&gt; This function is non-reentrant.</li><li>&gt; Configuration Variant(s): CANIF_EXTENDED_RAM_CHECK_SUPPORT == STD_ON</li></ul> |  |
| Call context   |  |
| <ul style="list-style-type: none"><li>&gt; ANY</li></ul>   |  |

Table 4-44 CanIf\_RamCheckCorruptMailbox

### 4.3.12 CanIf\_RamCheckCorruptController

| Prototype  |  |
|--|--|
| void <b>CanIf_RamCheckCorruptController</b> ( uint8 ControllerId )   |  |
| Parameter  |  |
| ControllerId [in]  | Abstracted CanIf ControllerId which is assigned to a CAN controller, which is corrupt. |
| Return code  |  |
| -  | -  |
| Functional Description   |  |
| Called by the CAN Driver to notify CAN Interface that the specified CAN controller is corrupt. The specified corrupt CAN controller will be notified to the application.   |  |
| Particularities and Limitations  |  |
| <ul style="list-style-type: none"><li>&gt; Service ID: see table 'Service IDs'</li><li>&gt; This function is synchronous.</li><li>&gt; This function is non-reentrant.</li><li>&gt; Configuration Variant(s): CANIF_EXTENDED_RAM_CHECK_SUPPORT == STD_ON</li></ul> |  |
| Call context   |  |
| <ul style="list-style-type: none"><li>&gt; ANY</li></ul>   |  |

Table 4-45 CanIf\_RamCheckCorruptController

### 4.3.13 CanIf\_ControllerErrorStatePassive

| Prototype   |  |
|---|--|
| <pre>void CanIf_ControllerErrorStatePassive ( uint8 ControllerId, uint16 RxErrorCounter, uint16 TxErrorCounter )</pre>  |  |
| Parameter   |  |
| ControllerId [in]   | Abstracted CanIf ControllerId which is assigned to a CAN controller, at which the transistion to error state passive occurred. |
| RxErrorCounter [in]   | Value of the rx error counter from the specified CAN controller.   |
| TxErrorCounter [in]   | Value of the tx error counter from the specified CAN controller.   |
| Return code   |  |
| -   | -  |
| Functional Description  |  |
| Called by the CAN Driver to notify the CAN Interface about an occurred transistion to error state passive at the specified CAN controller.  |  |
| Particularities and Limitations   |  |
| <ul style="list-style-type: none"><li>&gt; Service ID: see table 'Service IDs'</li><li>&gt; This function is synchronous.</li><li>&gt; This function is reentrant.</li><li>&gt; Configuration Variant(s): CANIF_ENABLE_SECURITY_EVENT_REPORTING == STD_ON</li></ul> |  |
| Call context  |  |
| <ul style="list-style-type: none"><li>&gt; ANY</li></ul>  |  |

Table 4-46 CanIf\_ControllerErrorStatePassive

#### 4.3.14 CanIf\_ErrorNotification

| Prototype   |   |
|---|---|
| void <b>CanIf_ErrorNotification</b> ( uint8 ControllerId, Can_ErrorType CanError )  |   |
| Parameter   |   |
| ControllerId [in]   | Abstracted CanIf ControllerId which is assigned to a CAN controller, at which the bus error occurred. |
| CanError [in]   | Occured bus error.  |
| Return code   |   |
| -   | -   |
| Functional Description  |   |
| Called by the CAN Driver to notify the CAN Interface about an occurred bus error at specified CAN controller  |   |
| Particularities and Limitations   |   |
| <ul style="list-style-type: none"><li>&gt; Service ID: see table 'Service IDs'</li><li>&gt; This function is synchronous.</li><li>&gt; This function is reentrant.</li><li>&gt; Configuration Variant(s): CANIF_ENABLE_SECURITY_EVENT_REPORTING == STD_ON</li></ul> |   |
| Call context  |   |
| <ul style="list-style-type: none"><li>&gt; ANY</li></ul>  |   |

Table 4-47 CanIf\_ErrorNotification

## 4.4 Configurable Interfaces

### 4.4.1 Notifications

At its configurable interfaces the CAN Interface defines notifications that can be mapped to callback functions provided by other modules. The mapping is not statically defined by the CAN Interface but can be performed at configuration time. The function prototypes that can be used for the configuration have to match the appropriate function prototype signatures, which are described in the following sub-chapters.

#### 4.4.1.1 <User\_RxIndication> (Simple Layout)

| Prototype   |  |
|---|--|
| <code>void &lt;User_RxIndication&gt; ( PduIdType CanRxPduId, const uint8* CanSduPtr )</code>                  |  |
| Parameter   |  |
| CanRxPduId [in]   | Upper layer handle from the received Rx-PDU. |
| CanSduPtr [in]  | Pointer to the data of the received Rx-PDU.  |
| Return code   |  |
| -   | -  |
| Functional Description  |  |
| Called by the CAN Interface to notify the configured upper layer about the reception of the specified Rx-PDU. |  |
| Particularities and Limitations   |  |
| > Configuration Variant(s): CANIF_RX_INDICATION_TYPE_I_IS_USED == STD_ON                                      |  |
| Call context  |  |
| > ANY   |  |

Table 4-48 <User\_RxIndication> (Simple Layout)

#### 4.4.1.2 <User\_RxIndication> (Advanced Layout)

| Prototype   |   |
|---|---|
| <pre>void &lt;User_RxIndication&gt; ( PduIdType CanRxPduId,<br/>const PduInfoType* PduInfoPtr )</pre>         |   |
| Parameter   |   |
| CanRxPduId [in]   | Upper layer handle from the received Rx-PDU.                          |
| PduInfoPtr [in]   | Pointer to a struct containing the properties of the received Rx-PDU. |
| Return code   |   |
| -   | -   |
| Functional Description  |   |
| Called by the CAN Interface to notify the configured upper layer about the reception of the specified Rx-PDU. |   |
| Particularities and Limitations   |   |
| > Configuration Variant(s): -   |   |
| Call context  |   |
| > ANY   |   |

Table 4-49 &lt;User\_RxIndication&gt; (Advanced Layout)

#### 4.4.1.3 <User\_RxIndication> (NmOsek Layout)

| Prototype  |  |
|--|--|
| <pre>void &lt;User_RxIndication&gt; ( PduIdType CanRxPduId, const uint8* CanSduPtr,<br/>Can_IdType CanId )</pre> |  |
| Parameter  |  |
| CanRxPduId [in]  | Upper layer handle from the received Rx-PDU. |
| CanSduPtr [in]   | Pointer to the data of the received Rx-PDU.  |
| CanId [in]   | Can Id from the received Rx-PDU.             |
| Return code  |  |
| -  | -  |
| Functional Description   |  |
| Called by the CAN Interface to notify the configured upper layer about the reception of the specified Rx-PDU.    |  |
| Particularities and Limitations  |  |
| > Configuration Variant(s): CANIF_SUPPORT_NMOSEK_INDICATION == STD_ON  |  |
| Call context   |  |
| > ANY  |  |

Table 4-50 &lt;User\_RxIndication&gt; (NmOsek Layout)



#### 4.4.1.4 <User\_RxIndication> (Cdd Layout)

| Prototype   |   |
|---|---|
| <pre>void &lt;User_RxIndication&gt; ( PduIdType CanRxPduId, const PduInfoType* PduInfoPtr, Can_IdType CanId )</pre> |   |
| Parameter   |   |
| CanRxPduId [in]   | Upper layer handle from the received Rx-PDU.                          |
| PduInfoPtr [in]   | Pointer to a struct containing the properties of the received Rx-PDU. |
| CanId [in]  | Can Id from the received Rx-PDU.                                      |
| Return code   |   |
| -   | -   |
| Functional Description  |   |
| Called by the CAN Interface to notify the configured upper layer about the reception of the specified Rx-PDU.       |   |
| Particularities and Limitations   |   |
| > Configuration Variant(s): CANIF_RX_INDICATION_TYPE_IV_IS_USED == STD_ON   |   |
| Call context  |   |
| > ANY   |   |

Table 4-51 &lt;User\_RxIndication&gt; (Cdd Layout)

#### 4.4.1.5 <User\_TxConfirmation>

| Prototype  |   |
|--|---|
| <pre>void &lt;User_TxConfirmation&gt; ( PduIdType TxPduId )</pre>  |   |
| Parameter  |   |
| TxPduId [in]   | Upper layer handle from the transmitted Tx-PDU. |
| Return code  |   |
| -  | -   |
| Functional Description   |   |
| Called by the CAN Interface to notify the configured upper layer about the transmission of the specified Tx-PDU. |   |
| Particularities and Limitations  |   |
| > Configuration Variant(s): -  |   |
| Call context   |   |
| > ANY  |   |

Table 4-52 &lt;User\_TxConfirmation&gt;

#### 4.4.1.6 <User\_ControllerBusOff>

| Prototype   |   |
|---|---|
| void <User_ControllerBusOff> ( uint8 ControllerId )   |   |
| Parameter   |   |
| ControllerId [in]   | Abstracted CanIf ControllerId which is assigned to a CAN controller at which a BusOff occurred. |
| Return code   |   |
| -   | -   |
| Functional Description  |   |
| Called by the CAN Interface to notify the configured upper layer about an occurred BusOff-event for the specified CAN controller. |   |
| Particularities and Limitations   |   |
| > Configuration Variant(s): -   |   |
| Call context  |   |
| > ANY   |   |

Table 4-53 &lt;User\_ControllerBusOff&gt;

#### 4.4.1.7 <User\_ControllerModeIndication>

| Prototype   |   |
|---|---|
| void <User_ControllerModeIndication> ( uint8 ControllerId, CanIf_ControllerModeType ControllerMode )  |   |
| Parameter   |   |
| ControllerId [in]   | Abstracted CanIf Controlle which is assigned to a CAN controller, at which the controller mode transition occurred. |
| ControllerMode [in]   | Controller mode to which the CAN controller transitioned.   |
| Return code   |   |
| -   | -   |
| Functional Description  |   |
| Called by the CAN Interface to notify the configured upper layer about a successful controller mode transition at the specified CAN controller. |   |
| Particularities and Limitations   |   |
| > Configuration Variant(s): -   |   |
| Call context  |   |
| > ANY   |   |

Table 4-54 &lt;User\_ControllerModeIndication&gt;

#### 4.4.1.8 <User\_TrcvModeIndication>

| Prototype   |   |
|---|---|
| <pre>void &lt;User_TrcvModeIndication&gt; ( uint8 TransceiverId, CanTrcv_TrcvModeType<br/>TransceiverMode )</pre>                                 |   |
| Parameter   |   |
| TransceiverId [in]  | Abstracted TransceiverId which is assigned to a CAN transceiver, at which a transceiver mode transition occurred. |
| TransceiverMode [in]  | Transceiver mode to which the CAN transceiver transitioned.   |
| Return code   |   |
| -   | -   |
| Functional Description  |   |
| Called by the CAN Interface to notify the configured upper layer about a successful transceiver mode transition at the specified CAN transceiver. |   |
| Particularities and Limitations   |   |
| > Configuration Variant(s): CANIF_TRCV_HANDLING == STD_ON   |   |
| Call context  |   |
| > ANY   |   |

Table 4-55 &lt;User\_TrcvModeIndication&gt;

#### 4.4.1.9 <User\_ConfirmPnAvailability >

| Prototype  |   |
|--|---|
| <pre>void &lt;User_ConfirmPnAvailability&gt; ( uint8 TransceiverId )</pre>   |   |
| Parameter  |   |
| TransceiverId [in]   | Abstracted CanIf TransceiverId which is assigned to a CAN transceiver, which has confirmed the PN availability. |
| Return code  |   |
| -  | -   |
| Functional Description   |   |
| Called by the CAN Interface to notify the configured upper layer that the specified CAN transceiver is running in PN communication mode. |   |
| Particularities and Limitations  |   |
| > Configuration Variant(s): CANIF_TRCV_HANDLING == STD_ON and<br>CANIF_PN_TRCV_HANDLING == STD_ON  |   |
| Call context   |   |
| > ANY  |   |

Table 4-56 &lt;User\_ConfirmPnAvailability &gt;

#### 4.4.1.10 <User\_ClearTrcvWufFlagIndication>

| Prototype   |  |
|---|--|
| void <User_ClearTrcvWufFlagIndication> ( uint8 TransceiverId )  |  |
| Parameter   |  |
| TransceiverId [in]  | Abstracted CanIf TransceiverId which is assigned to a CAN transceiver, which WUF flag was cleared. |
| Return code   |  |
| -   | -  |
| Functional Description  |  |
| Called by the CAN Interface to notify the configured upper layer that the specified CAN transceiver has cleared the WUF flag. |  |
| Particularities and Limitations   |  |
| > Configuration Variant(s): CANIF_TRCV_HANDLING == STD_ON and<br>CANIF_PN_TRCV_HANDLING == STD_ON                             |  |
| Call context  |  |
| > ANY   |  |

Table 4-57 &lt;User\_ClearTrcvWufFlagIndication&gt;

#### 4.4.1.11 <User\_CheckTrcvWakeFlagIndication>

| Prototype  |   |
|--|---|
| void <User_CheckTrcvWakeFlagIndication> ( uint8 TransceiverId )  |   |
| Parameter  |   |
| TransceiverId [in]   | Abstracted CanIf TransceiverId which is assigned to a CAN transceiver, which has detected a wakeup. |
| Return code  |   |
| -  | -   |
| Functional Description   |   |
| Called by the CAN Interface to notify the configured upper layer that the specified CAN transceiver has finished the check of its wakeup events. |   |
| Particularities and Limitations  |   |
| > Configuration Variant(s): CANIF_TRCV_HANDLING == STD_ON and<br>CANIF_PN_TRCV_HANDLING == STD_ON  |   |
| Call context   |   |
| > ANY  |   |

Table 4-58 &lt;User\_CheckTrcvWakeFlagIndication&gt;

#### 4.4.1.12 <User\_ValidateWakeupEvent>

| Prototype   |   |
|---|---|
| <b>void &lt;User_ValidateWakeupEvent&gt;</b> ( EcuM_WakeupSourceType sources )                                    |   |
| Parameter   |   |
| sources [in]  | Validated CAN wakeup events. Every CAN controller or CAN transceiver can be a separate wakeup source. |
| Return code   |   |
| -   | -   |
| Functional Description  |   |
| Called by the CAN Interface to notify the configured upper layer about the specified validated CAN wakeup events. |   |
| Particularities and Limitations   |   |
| > Configuration Variant(s): CANIF_WAKEUP_VALIDATION == STD_ON   |   |
| Call context  |   |
| > ANY   |   |

Table 4-59 &lt;User\_ValidateWakeupEvent&gt;

#### 4.4.1.13 <User\_RamCheckCorruptMailbox>

| Prototype   |   |
|---|---|
| <b>void &lt;User_RamCheckCorruptMailbox&gt;</b> ( uint8 ControllerId, CanIf_HwHandleType HwHandle )     |   |
| Parameter   |   |
| ControllerId [in]   | Abstracted CanIf Controller which is assigned to a CAN controller with the corrupt mailbox. |
| HwHandle [in]   | The corrupt mailbox.  |
| Return code   |   |
| -   | -   |
| Functional Description  |   |
| Called by the CAN Interface to notify the configured upper layer that the specified mailbox is corrupt. |   |
| Particularities and Limitations   |   |
| > Configuration Variant(s): CANIF_EXTENDED_RAM_CHECK_SUPPORT == STD_ON                                  |   |
| Call context  |   |
| > ANY   |   |

Table 4-60 &lt;User\_RamCheckCorruptMailbox&gt;

#### 4.4.1.14 <User\_RamCheckCorruptController>

| Prototype  |  |
|--|--|
| void <User_RamCheckCorruptController> ( uint8 ControllerId )   |  |
| Parameter  |  |
| ControllerId [in]  | Abstracted CanIf Controller which is assigned to a CAN controller, which is corrupt. |
| Return code  |  |
| -  | -  |
| Functional Description   |  |
| Called by the CAN Interface to notify the configured upper layer that the specified CAN controller is corrupt. |  |
| Particularities and Limitations  |  |
| > Configuration Variant(s): CANIF_EXTENDED_RAM_CHECK_SUPPORT == STD_ON   |  |
| Call context   |  |
| > ANY  |  |

Table 4-61 &lt;User\_RamCheckCorruptController&gt;

#### 4.4.1.15 <User\_DataChecksumRxErrFct>

| Prototype   |   |
|---|---|
| void <User_DataChecksumRxErrFct> ( PduIdType CanIfRxPduId )   |   |
| Parameter   |   |
| CanIfRxPduId [in]   | Handle of the Rx-PDU which has a wrong data checksum. |
| Return code   |   |
| -   | -   |
| Functional Description  |   |
| Called by the CAN Interface to notify the configured upper layer that the specified Rx-PDU was received with a wrong data checksum. |   |
| Particularities and Limitations   |   |
| > Configuration Variant(s): CANIF_DATA_CHECKSUM_RX_SUPPORT == STD_ON  |   |
| Call context  |   |
| > ANY   |   |

Table 4-62 &lt;User\_DataChecksumRxErrFct&gt;

## 4.4.2 Callout Functions

At its configurable interfaces the CAN Interface defines callout functions. The declarations of the callout functions are provided by the BSW module, i.e. the CAN Interface. It is the integrator's task to provide the corresponding function definitions. The definitions of the callouts can be adjusted to the system's needs. The CAN Interface callout function declarations are described in the following tables.

### 4.4.2.1 CanIf\_RxIndicationSubDataChecksumRxVerify

| Prototype   |   |
|---|---|
| <pre>Std_ReturnType CanIf_RxIndicationSubDataChecksumRxVerify ( PduIdType CanIfRxPduId, Can_IdType CanId, uint8 CanDlc, const uint8 *CanSduPtr )</pre>  |   |
| Parameter   |   |
| CanIfRxPduId [in]   | Handle of the Rx-PDU, which checksum shall be verified.   |
| CanId [in]  | CAN identifier of received Rx-PDU   |
| CanDlc [in]   | Data length of received Rx-PDU  |
| CanSduPtr [in]  | Pointer to data of received Rx-PDU  |
| Return code   |   |
| E_OK  | Verification of checksum passed. In this case the Rx-PDU is forwarded to upper layer.                   |
| E_NOT_OK  | Verification of checksum failed. In this case the Rx-PDU is discarded and NOT forwarded to upper layer. |
| Functional Description  |   |
| Is called by the CAN Interface to verify the data checksum from a received Rx-PDU that contains a data checksum.  |   |
| Particularities and Limitations   |   |
| <ul style="list-style-type: none"> <li>&gt; This function is synchronous.</li> <li>&gt; This function is reentrant.</li> <li>&gt; This API is called in context in which the consistency of all passed parameters is ensured. Hence no further protection is required within.</li> <li>&gt; Configuration Variant(s): CANIF_DATA_CHECKSUM_RX_SUPPORT == STD_ON</li> </ul> |   |
| Call context  |   |
| <ul style="list-style-type: none"> <li>&gt; ANY</li> </ul>  |   |

Table 4-63 CanIf\_RxIndicationSubDataChecksumRxVerify

#### 4.4.2.2 CanIf\_TransmitSubDataChecksumTxAppend

| Prototype   |  |
|---|--|
| <pre>void <b>TransmitSubDataChecksumTxAppend</b> ( const Can_PduType *txPduInfoPtr, uint8 *txPduDataWithChecksumPtr )</pre>   |  |
| Parameter   |  |
| txPduInfoPtr [in]   | Pointer to Tx-PDU-parameters: CAN identifier, data length, data.   |
| txPduDataWithChecksumPtr [out]  | <p>Pointer to data buffer where the data of Tx-PDU incl. the checksum will be stored in. The data checksum PDU is transmitted with data stored in this buffer.</p> <p>Note: Parameter "txPduDataWithChecksumPtr" may only be written with index <math>\geq 0</math> and <math>&lt; \text{CANIF\_CFG\_MAXTXDLC\_PLUS\_DATACHECKSUM}</math> (see file <code>CanIf_Cfg.h</code>). The length of data can not be changed hence the checksum must only be added within valid data-length of the Tx-PDU which is given by range: <math>0 - (\text{txPduInfoPtr} \rightarrow \text{length} - 1)</math>.</p> |
| Return code   |  |
| -   | -  |
| Functional Description  |  |
| Is called by the CAN Interface before transmission of a data checksum Tx-PDU in order to add a checksum to its data.  |  |
| Particularities and Limitations   |  |
| <ul style="list-style-type: none"><li>&gt; This function is synchronous.</li><li>&gt; This function is reentrant.</li><li>&gt; This API is called in context in which the consistency of all passed parameters is ensured. Hence no further protection is required within.</li><li>&gt; Configuration Variant(s): <code>CANIF_DATA_CHECKSUM_TX_SUPPORT == STD_ON</code></li></ul> |  |
| Call context  |  |
| <ul style="list-style-type: none"><li>&gt; ANY</li></ul>  |  |

Table 4-64 CanIf\_TransmitSubDataChecksumTxAppend



## 5 Configuration

In the CAN Interface the attributes can be configured with the following tool:

- > DaVinci Configurator 5

### 5.1 Configuration Variants

The CAN Interface supports the configuration variants

- > VARIANT-PRE-COMPILE
- > VARIANT-POST-BUILD-LOADABLE
- > VARIANT-POST-BUILD-SEELCTABLE

The configuration classes of the CAN Interface parameters depend on the supported configuration variants. For their definitions please see the `CanIf_bswmd.arxml` file.

## 6 Glossary and Abbreviations

### 6.1 Glossary

| Term                   | Description  |
|------------------------|--|
| DaVinci Configurator 5 | Configuration and generation tool for MICROSAR Classic software components |

Table 6-1 Glossary

### 6.2 Abbreviations

| Abbreviation | Description  |
|--------------|--|
| API          | Application Programming Interface                                      |
| Appl         | Application  |
| AUTOSAR      | Automotive Open System Architecture                                    |
| BSW          | Basis Software   |
| BSWMD        | Basis Software Module Description                                      |
| CAN          | Controller Area Network  |
| CanIf        | CAN Interface module   |
| CanNm        | CAN Network Manager module   |
| CanSM        | CAN State Manager module   |
| CanTp        | CAN Transport Layer module   |
| CanTSyn      | Global Time Synchronization over CAN module                            |
| CanTrcv      | CAN Transceiver Driver module  |
| CCP          | CAN Calibration Protocol module  |
| CDD          | Complex Device Driver module   |
| DET          | Default Error Tracer module  |
| DLC          | Data Length Code   |
| ECU          | Electronic Control Unit  |
| EcuM         | ECU State Manager module   |
| FD           | Flexible Data-rate   |
| FIFO         | First In First Out   |
| HRH          | Hardware Receive Handle  |
| HTH          | Hardware Transmit Handle   |
| HW           | Hardware   |
| IdsM         | Intrusion Detection System Manager module                              |
| J1939Nm      | J1939 Network Management module  |
| J1939Tp      | J1939 Transport Layer module   |
| MICROSAR     | Microcontroller Open System Architecture (the Vector AUTOSAR solution) |
| Msn          | Module short name of a BSW component/module                            |

| Abbreviation | Description                           |
|--------------|---------------------------------------|
| PDU          | Protocol Data Unit                    |
| PduR         | PDU Router module                     |
| SchM         | Schedule Manager module               |
| SDU          | Service Data Unit                     |
| SRS          | Software Requirement Specification    |
| SWS          | Software Specification                |
| VStdLib      | Vector Standard Library               |
| XCP          | Universal Calibration Protocol module |

Table 6-2 Abbreviations

## 7 Contact

Visit our website for more information on

- > News
- > Products
- > Demo software
- > Support
- > Training data
- > Addresses

[www.vector.com](http://www.vector.com)