


WIRING CODE	
COLOR	DESIGNATION
RED	(+)EXCITATION
BLACK	(-)EXCITATION
GREEN	(-)OUTPUT
WHITE	(+)OUTPUT

SPECIFICATIONS		
AVAILABLE RANGES:	25 TO 100 LBS	
SUPPLY:	10 VDC	
OUTPUT:	2 mV/V	
NONLINEARITY:	± .15% F.S.	
HYSTERESIS:	± .15% F.S.	
COMPENSATED TEMPERATURE:	60°F TO 160°F	
TEMPERATURE EFFECT:		
ZERO:	±.005% F.S./°F	
SPAN:	±.005% Rdg./°F	
BRIDGE RESISTANCE:	350 ohms	
CASE MATERIAL:	17-4 PH SS	

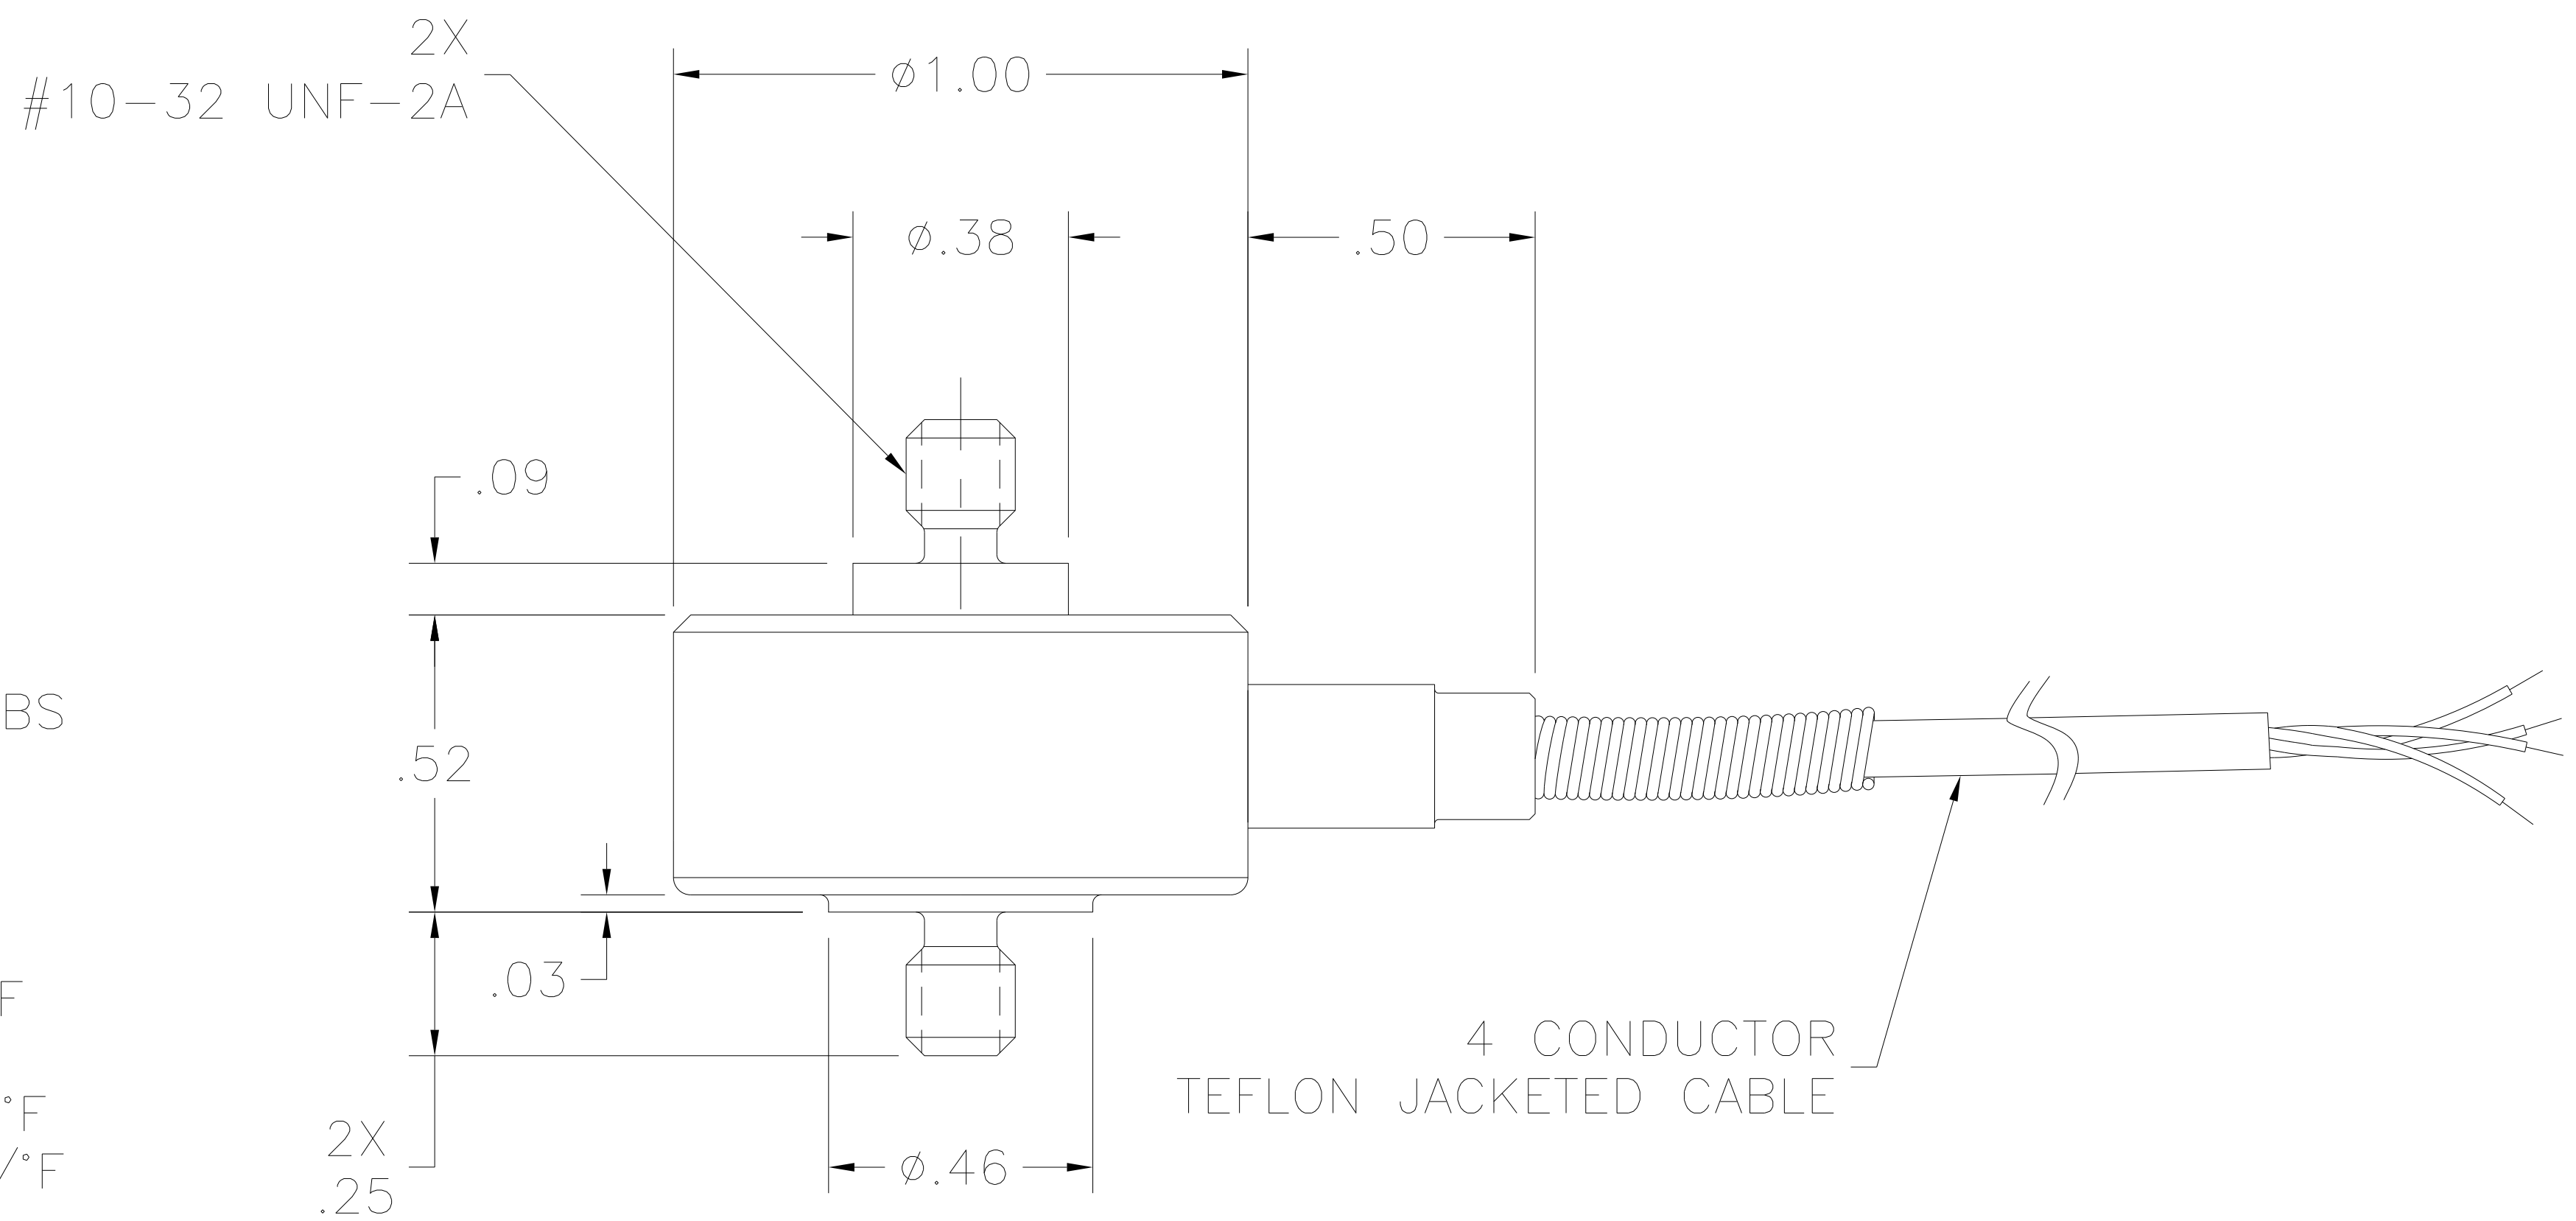

-	INITIAL RELEASE TO PRODUCTION		-	-
REV	DESCRIPTION		REVISED BY	APPROVED BY
DRW:	JWD 1/24/02	CHK: RAF 01/30/02	MFG:	ENG: BDR 01/28/02

SCALE: NONE	SENSOTEC INC. 2080 ARLINGATE LANE, COLUMBUS, OHIO 43228 © SENSOTEC, INC. ALL RIGHTS RESERVED		
.X ±.1			
.XX ±.01			
.XXX			
REV ECN	±.005	63	DOCUMENT NUMBER 000-1462-00
USED ON	±1/2"	SHEET 1 OF 1	