




# Linux Kernel




# Linux kernel key features

- Portability and hardware support
- Scalability
- Compliance to standards and interoperability
- Exhaustive networking support
- Stability and reliability
- Modularity
- Easy to program.

# Linux Kernel in the System

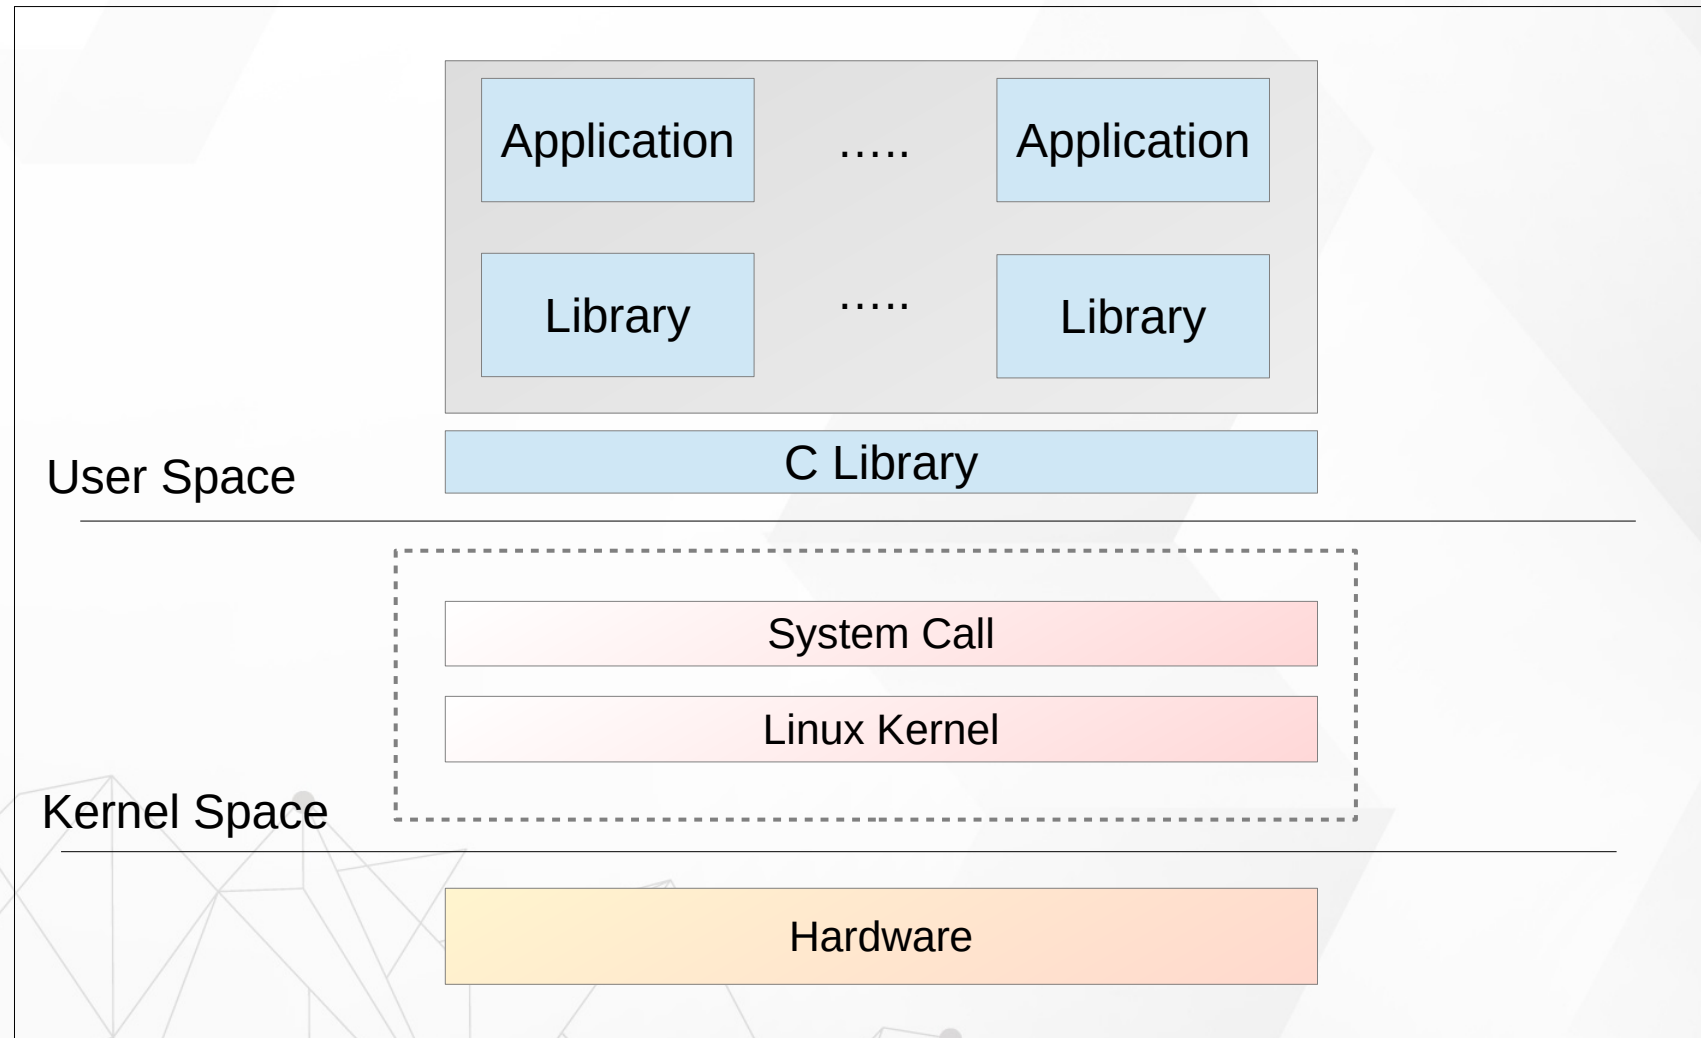

# Linux Kernel

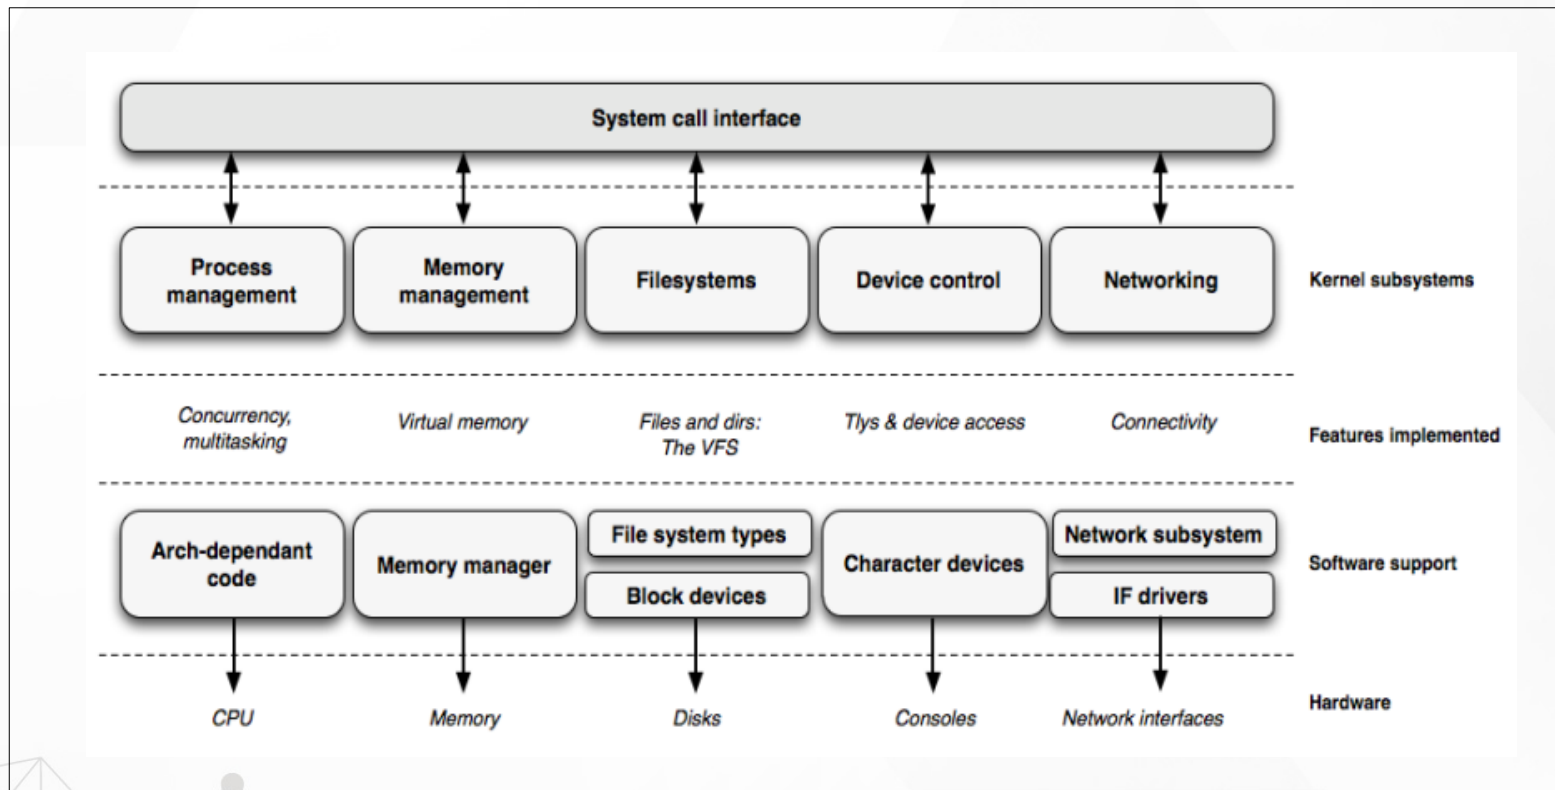

# Kernel Source

➤ <https://www.kernel.org/>

➤ Many chip vendors

➤ kernel sub-communities

- Architecture communities
  - ARM, MIPS, PowerPC ...
- device drivers communities
  - I2C, SPI, USB, PCI, network ...



# Programming language

- Implemented in C like all Unix systems
- A little Assembly is used too
- **No C++ used**
- **No C library**
- **No floating point** computation
- Kernel code has to supply its own library implementations
  - X : printf(), memset(), malloc(),...
  - O: printk(), memset(), kmalloc()



# Linux Sources Important Folder

## Kernel Image

- arch/<ARCH>/boot/
- Arch/arm64/boot

## DTS

- arch/<ARCH>/boot/dts
- Arch/arm64/boot/dts/rockchip/

## driver/

## Documentation/

# Kernel Basic Command





# Basic Build Command

➤ \$ make

- Build all

➤ \$ make dtbs

- Build Device-tree only

➤ \$ make modules

- Build kernel modules only

➤ \$ make modules\_install

- Install all modules to folder



# Basic Build Command

➤ [CMD] make deb-pkg

➤ Build both source and binary deb kernel packages

➤ [CMD] make modules\_install

➤ Install all modules to INSTALL\_MOD\_PATH

➤ [CMD] make mrproper

➤ Remove all generated files (.config)

➤ [CMD] make clean

➤ [CMD] make distclean

➤ Remove editor backup and patch reject files

# Make Help


[CMD] make help

```
acs5k_defconfig      - Build for acs5k
acs5k_tiny_defconfig - Build for acs5k_tiny
afeb9260_defconfig   - Build for afeb9260
ag5evm_defconfig     - Build for ag5evm
am200epdkit_defconfig - Build for am200epdkit
ap4evb_defconfig     - Build for ap4evb
armadillo800eva_defconfig - Build for armadillo800eva
assabet_defconfig    - Build for assabet
at91_dt_defconfig     - Build for at91
at91rm9200_defconfig - Build for at91rm9200
at91sam9260_defconfig - Build for at91sam9260
at91sam9261_defconfig - Build for at91sam9261
at91sam9263_defconfig - Build for at91sam9263
at91sam9g20_defconfig - Build for at91sam9g20
at91sam9g45_defconfig - Build for at91sam9g45
at91sam9rl_defconfig - Build for at91sam9rl
at91x40_defconfig     - Build for at91x40
badge4_defconfig      - Build for badge4
bcmring_defconfig     - Build for bcmring
bonito_defconfig      - Build for bonito
cam60_defconfig       - Build for cam60
cerfcube_defconfig    - Build for cerfcube
cm_x2xx_defconfig     - Build for cm_x2xx
cm_x300_defconfig     - Build for cm_x300
cns3420vb_defconfig   - Build for cns3420vb
colibri_pxa270_defconfig - Build for colibri_pxa270
colibri_pxa300_defconfig - Build for colibri_pxa300
collie_defconfig      - Build for collie
corgi_defconfig       - Build for corgi
cpu9260_defconfig     - Build for cpu9260
cpu9a20_defconfig     - Build for cpu9a20

Other generic targets:
Bui all                - Build all targets marked with [*]
Bui* vmlinux           - Build the bare kernel
Bui* modules           - Build all modules
Bui modules_install    - Install all modules to INSTALL_MOD_PATH (default: /)
Bui firmware_install  - Install all firmware to INSTALL_FW_PATH
                        (default: $(INSTALL_MOD_PATH)/lib/firmware)
Bui dir/               - Build all files in dir and below
Bui dir/file.[oisS]    - Build specified target only
Bui dir/file.lst       - Build specified mixed source/assembly target only
                        (requires a recent binutils and recent build (System.map))
Bui dir/file.ko        - Build module including final link
Bui modules_prepare    - Set up for building external modules
Bui tags/TAGS          - Generate tags file for editors
Bui cscope             - Generate cscope index
Bui gtags              - Generate GNU GLOBAL index
Bui kernelrelease      - Output the release version string
Bui kernelversion      - Output the version stored in Makefile
Bui headers_install    - Install sanitised kernel headers to INSTALL_HDR_PATH
                        (default: /home/xlloss/work/tiny-4412/build/linux_3.5.0_tiny4412/usr)
```


# Linux System Memory Layout

# Physical and Virtual Memory

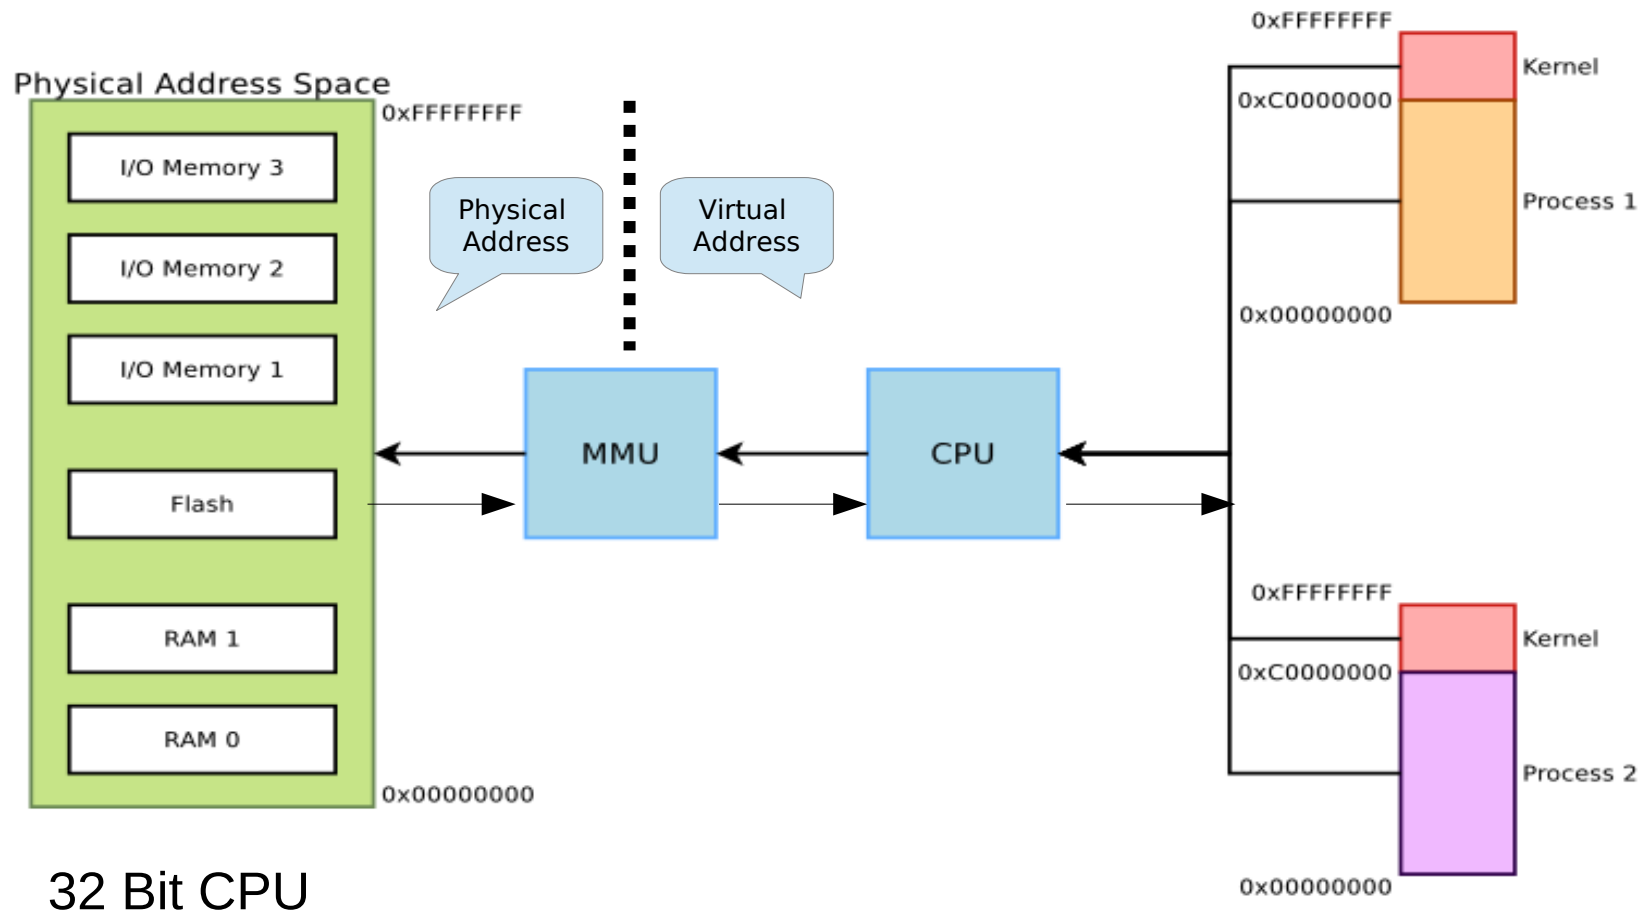


# Virtual Memory Organization

64 Bit CPU AArch64 Linux memory layout with 4KB pages + 3 levels

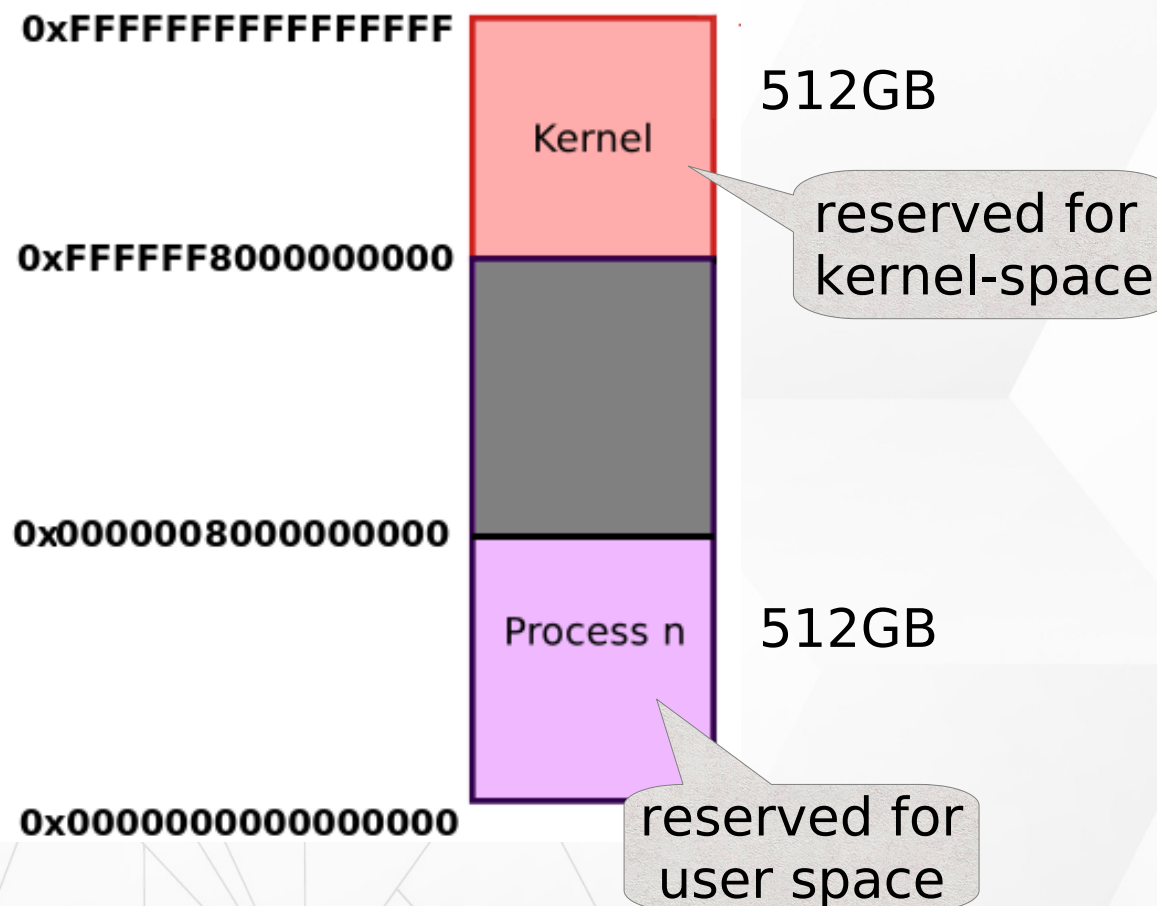




# Linux Process Memory

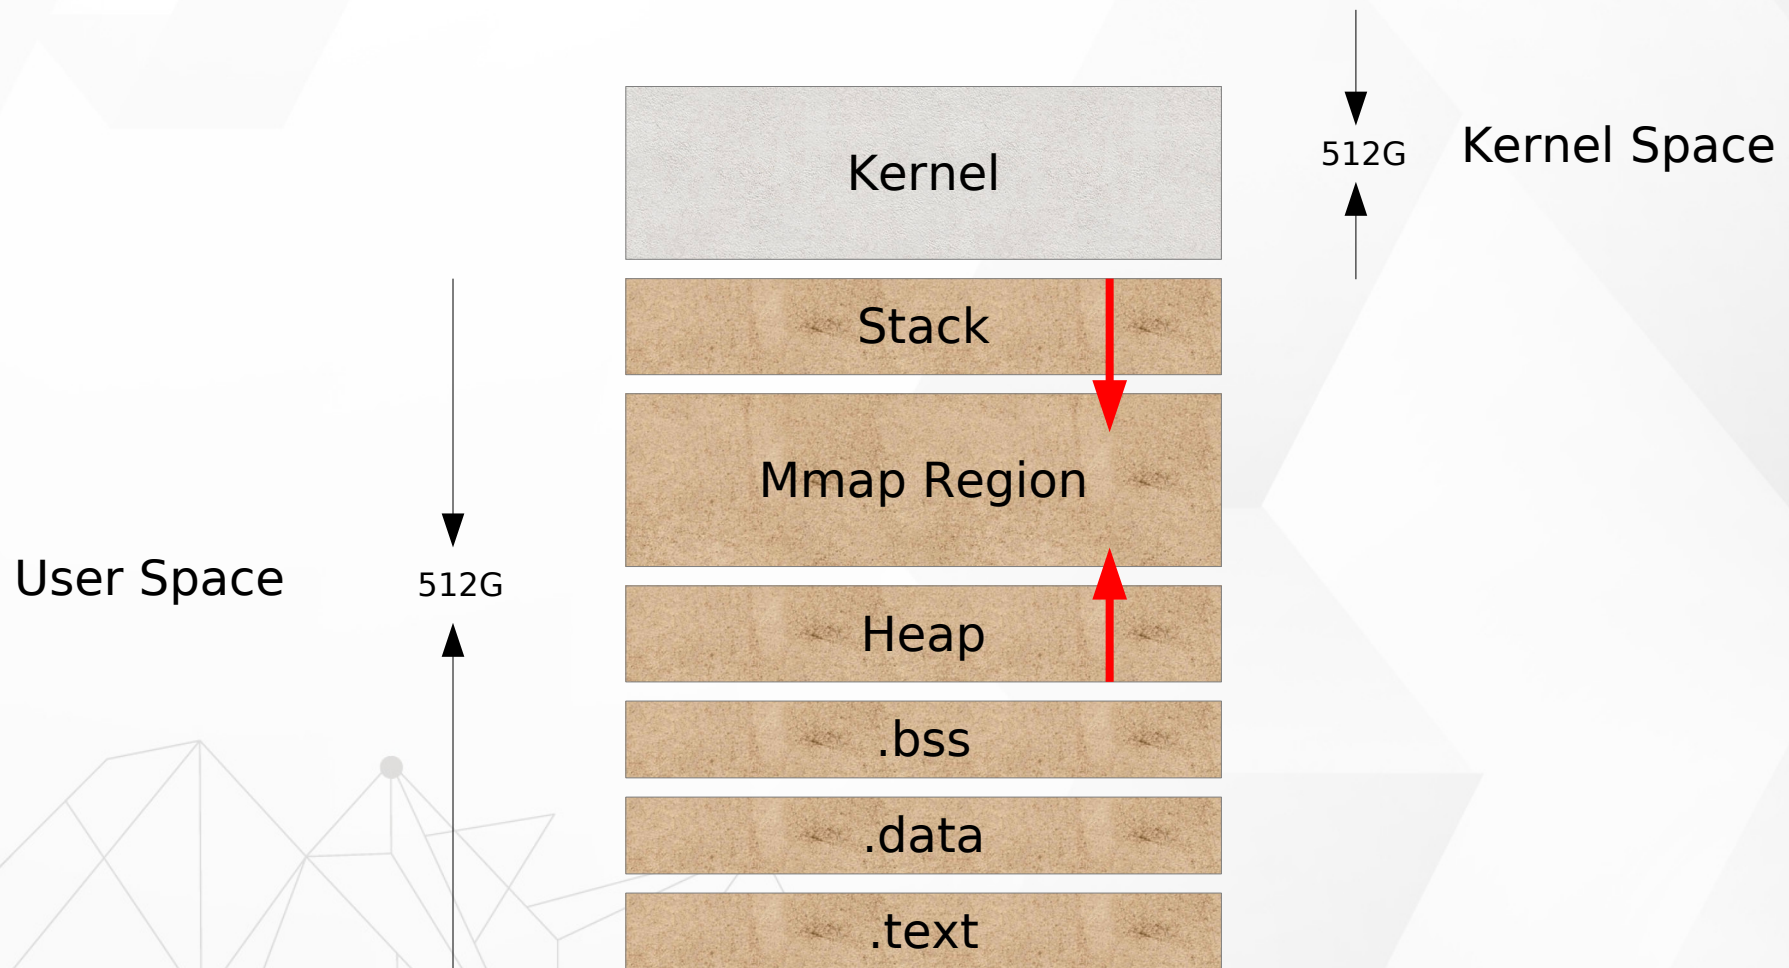

# Linux Process Memory

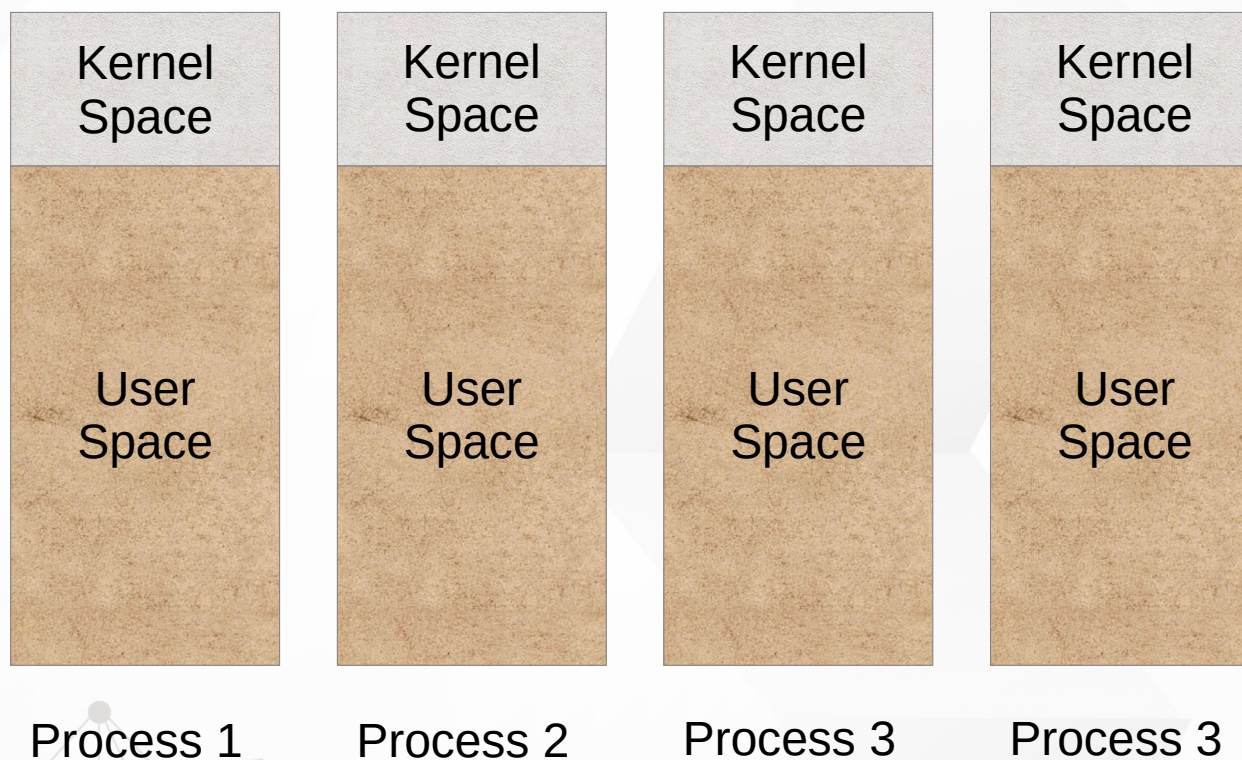



# How to Build Linux Kernel



# Specifying Cross-compilation

➤ make **ARCH=arm64 CROSS\_COMPILE=arm-linux- ...**

→ [CDM] export ARCH=arm64

→ [CMD] export CROSS\_COMPILE=aarch64-linux-gnu-

➤ Add above setting to script

→ [CMD] source \$PATH/**set\_toolchain.sh**



# set\_toolchain.sh

```
export PATH=/home/cadtc/host_share_folder/toolchain/gcc-linaro-7.3.1-2018.05-  
x86_64_aarch64-linux-gnu/bin/
```

```
# Toolchain path add to environment variable
```

```
export ARCH=arm64
```

```
# Set SOC architecture type
```

```
export CROSS_COMPILE=aarch64-linux-gnu-
```

```
#Set compile prefix name
```

```
export KERNELDIR=/home/cadtc/rockchip-bsp/kernel
```

```
#Set Linux kernel source path
```



# Predefined Configuration Files

## Default configuration

→ arch/<arch>/configs/

## Use RockPi4 default Configure

→ [CMD] make rockchip\_linux\_defconfig

## To create your own default configuration file

→ [CMD] **make savedefconfig**, to create a minimal configuration file

→ [CMD] mv **defconfig** arch/arm64/configs/myown\_defconfig



# Kernel Compilation


## Build kernel Image

- [CMD] make -j4
- To run multiple jobs in parallel if you have multiple CPU cores


## Generates Image

- arch/arm64/boot/**Image**
  - **Image** for ARM64,
- arch/arm64/boot/dts/rockchip/
  - DTB : rockpi-4b-linux.dtb

# Kernel Configuration

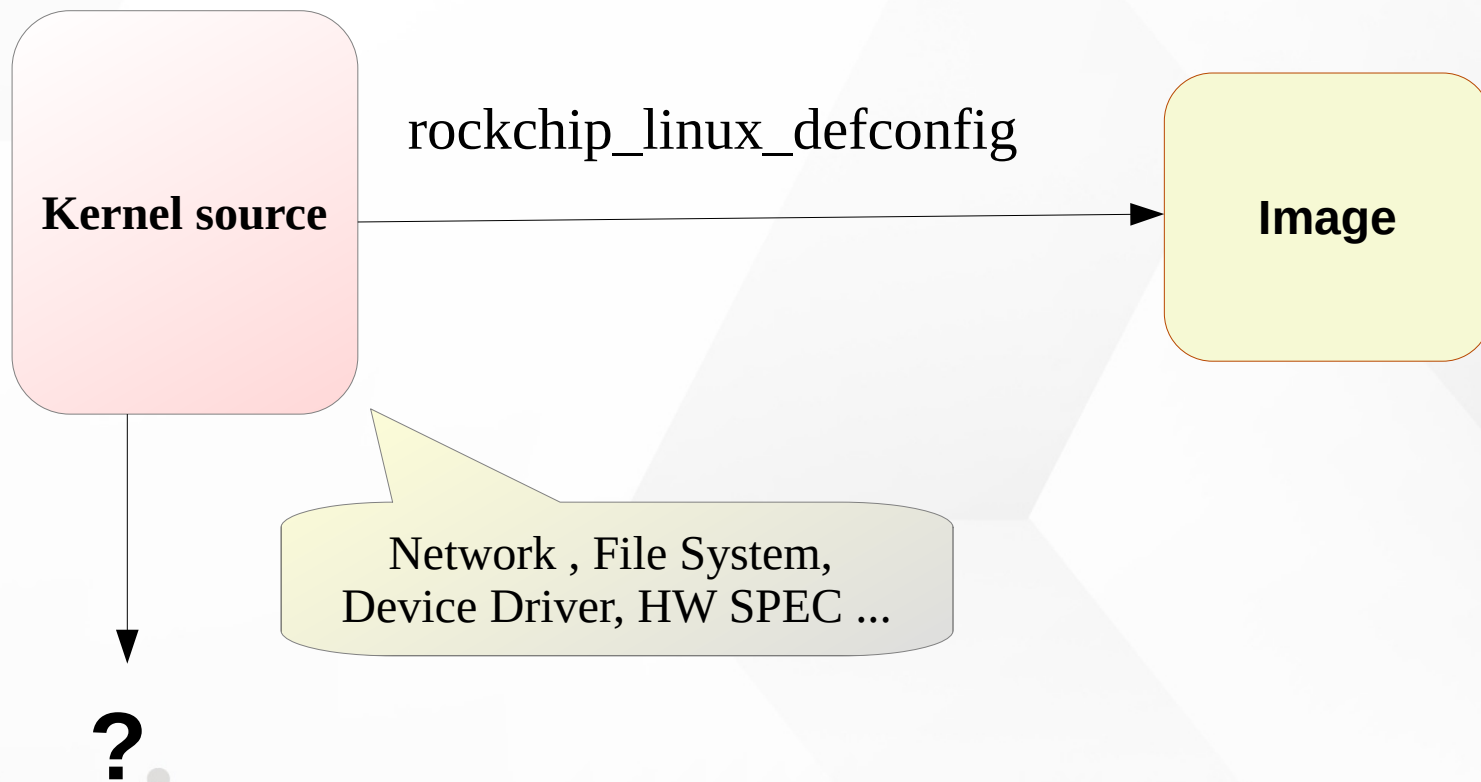

# Kernel Configuration

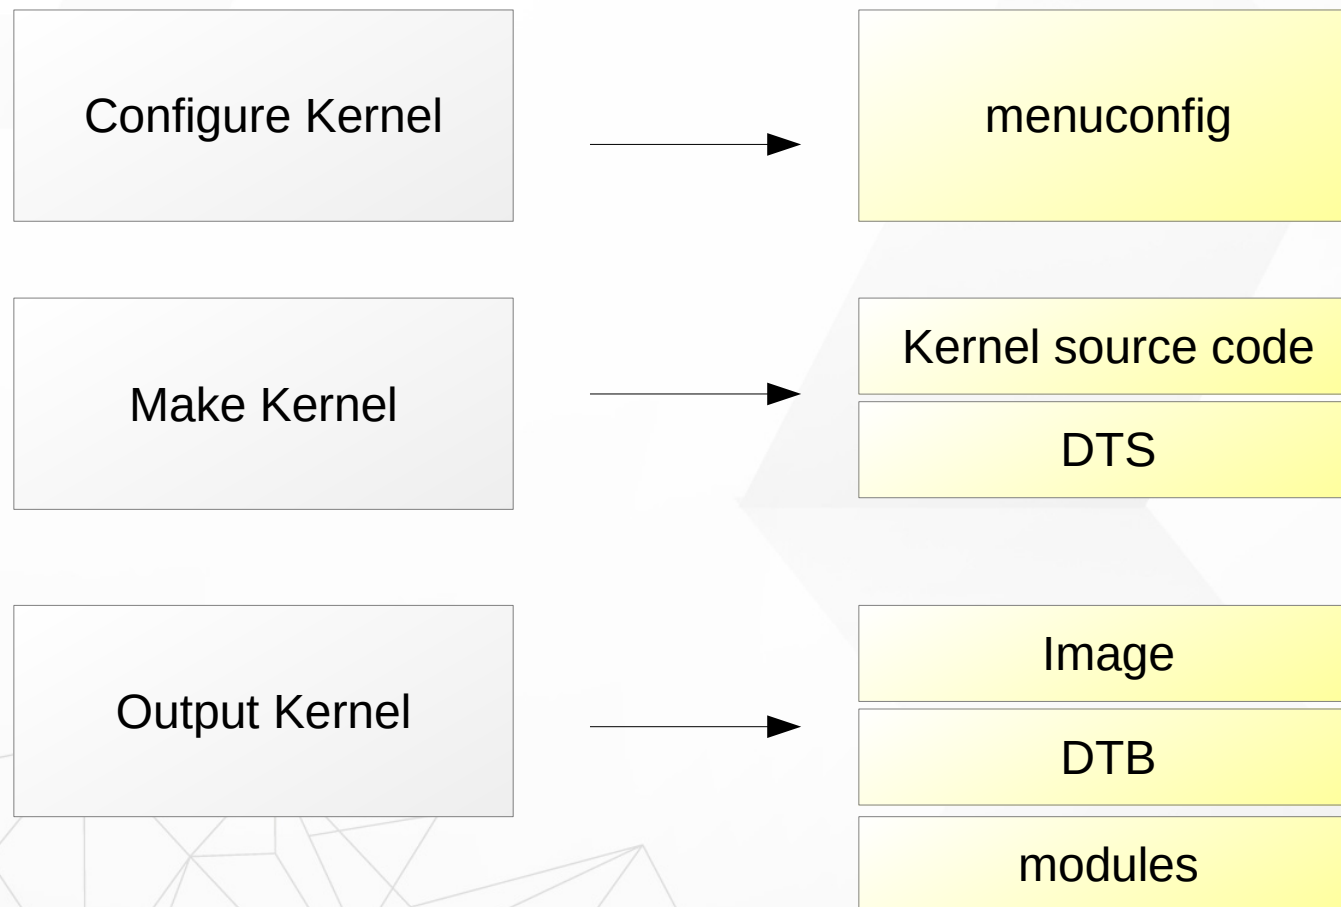

# How to Select Feature in Kernel





# Kernel Configuration

- The kernel configuration and build system is based on multiple **Makefiles**
- The configuration is stored in the **.config** file at the root of kernel sources
- As options have dependencies, typically never edited by hand, but through graphical or text interfaces
  - [CMD] make menuconfig → Text
  - [CMD] make xconfig → graphical

# Kernel Configuration

```
4096 Apr 20 11:56 .
4096 Mar 31 08:42 ..
4096 Mar 31 08:41 android
4096 Mar 31 08:41 arch
419 Mar 31 08:41 backported-features
4096 Mar 31 08:41 block
459 Mar 31 08:41 build.config.cuttlefish.aarch64
457 Mar 31 08:41 build.config.cuttlefish.x86_64
296 Mar 31 08:41 build.config.goldfish.arm
303 Mar 31 08:41 build.config.goldfish.arm64
277 Mar 31 08:41 build.config.goldfish.mips
279 Mar 31 08:41 build.config.goldfish.mips64
298 Mar 31 08:41 build.config.goldfish.x86
303 Mar 31 08:41 build.config.goldfish.x86_64
4096 Mar 31 08:41 certs
9 Mar 31 08:41 .checkpatch.conf
154048 Apr 20 11:56 .config
```

**.config**

```
cuttlefish_defconfig
defconfig
lsk_defconfig
nanopi4_linux_defconfig
px30_linux_defconfig
px30_linux_robot_defconfig
ranchu64_defconfig
rk1808_linux_defconfig
rk1808_x4_linux_defconfig
rk3308_linux_defconfig
rk3326_linux_defconfig
rk3326_linux_robot_defconfig
rk3399pro_npu_defconfig
rk3399pro_npu_pcie_defconfig
rockchip_cros_defconfig
rockchip_defconfig
rockchip_linux_defconfig
```

**`${KERNEL}/arch/arm64/configs/  
rockchip_linux_defconfig`**



# Kernel or Module?

- The kernel image is a single file, resulting from the linking of all object files that correspond to features enabled in the configuration
- Some features (device drivers, file-system, etc.) can however be compiled as modules

# Menuconfig

# menuconfig


```
Linux/arm64 4.4.179 Kernel Configuration
menus ---> (or empty submenus ----). Highlighted letters are hotkeys. Press
</> for Search. Legend: [*] built-in [ ] excluded <M> module < > module

General setup --->
[*] Enable loadable module support --->
[*] Enable the block layer --->
    Platform selection --->
    Bus support --->
    Kernel Features --->
    Boot options --->
    Userspace binary formats --->
    Power management options --->
    CPU Power Management --->
[*] Networking support --->
    Device Drivers --->
    Firmware Drivers --->
[ ] ACPI (Advanced Configuration and Power Interface) Support ----
    File systems --->
[ ] Virtualization ----
    Kernel hacking --->
    Security options --->
-*- Cryptographic API --->
    Library routines --->
```

# Kernel Configuration Options

```
[ ] Enable AHB driver for NVIDIA Tegra SoCs
    Generic Driver Options --->
    Bus devices --->
{M} Connector - unified userspace <-> kernelspace linker ----
< > Memory Technology Device (MTD) support ----
-* Device Tree and Open Firmware support --->
< > Parallel port support ----
[*] Block devices --->
<*> NVM Express block device
    Misc devices --->
    SCSI device support --->
<*> Serial ATA and Parallel ATA drivers (libata) --->
[*] Multiple devices driver support (RAID and LVM) --->
< > Generic Target Core Mod (TCM) and ConfigFS Infrastructure ----
[ ] Fusion MPT device support ----
    IEEE 1394 (FireWire) support --->
[*] Network device support --->
[ ] Open-Channel SSD target support ----
    Input device support --->
    Character devices --->
    I2C support --->
[*] SPI support --->
< > SPMI support ----
< > HSI support ----
    PPS support --->
    PTP clock support --->
    Pin controllers --->
-* GPIO Support --->
<M> Dallas's 1-wire support --->
-* Power supply class support --->
[*] Adaptive Voltage Scaling class support --->
<*> Hardware Monitoring support --->
<*> Generic Thermal sysfs driver --->
[*] Watchdog Timer Support --->
```

# Configuration

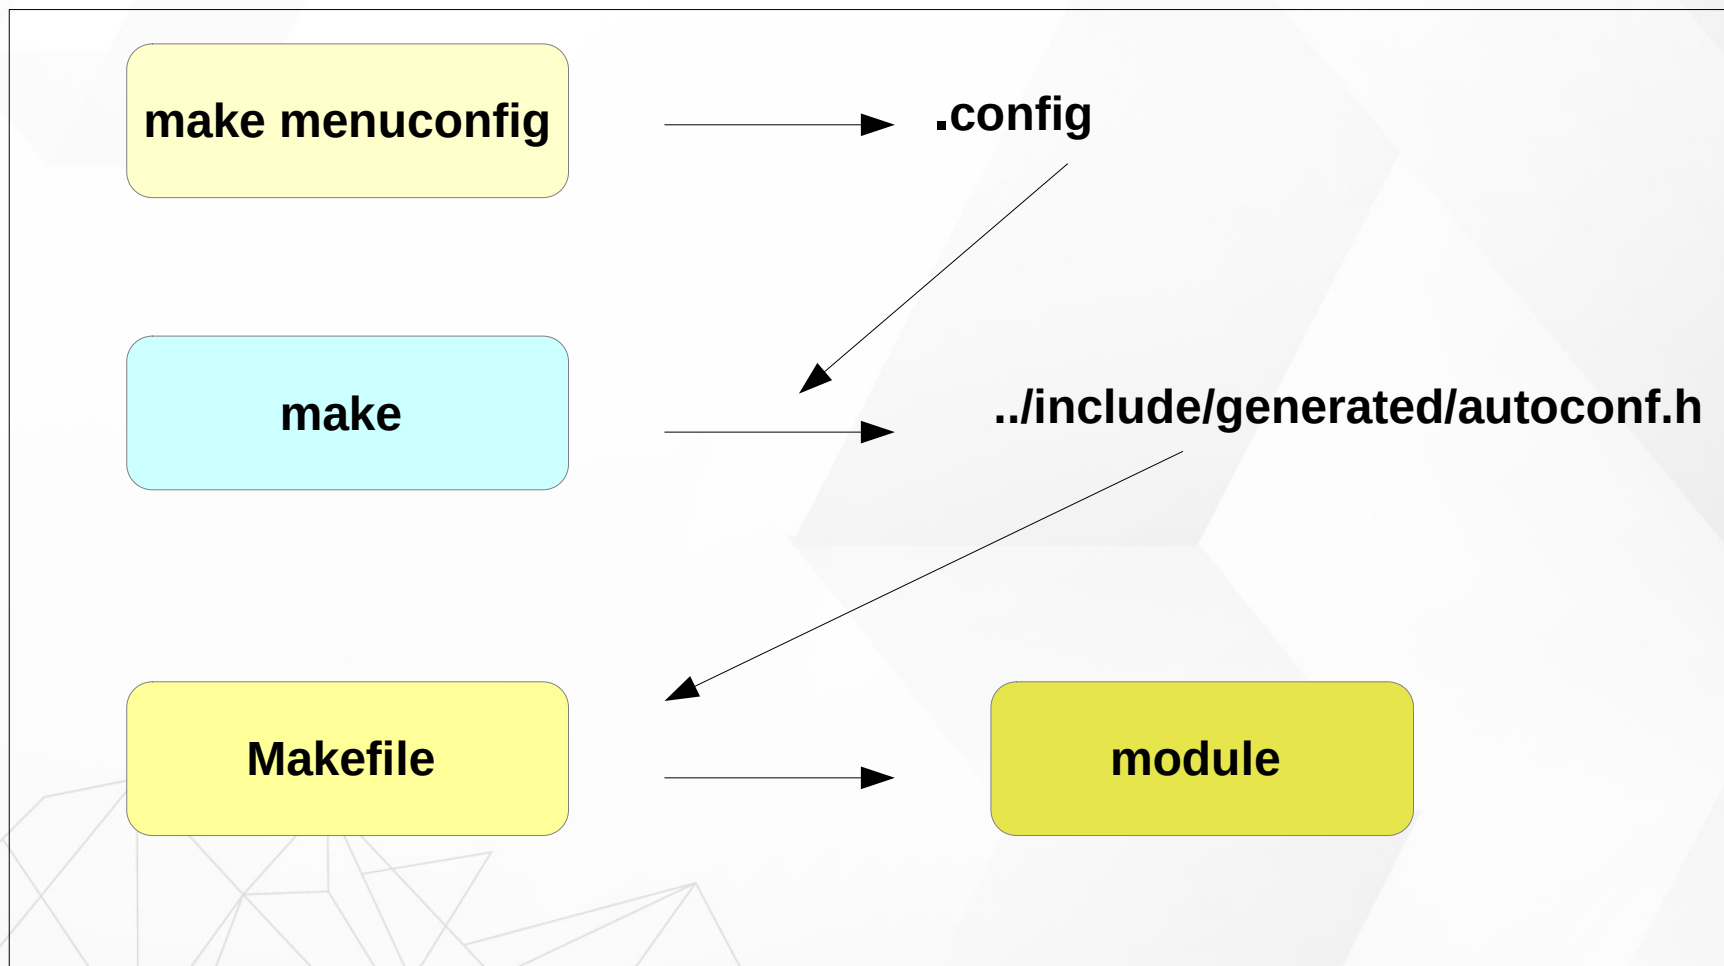



# Corresponding .config File Excerpt

```
# I2C system bus drivers (mostly embedded / system-on-chip)
#
# CONFIG_I2C_CADENCE is not set
# CONFIG_I2C_CBUS_GPIO is not set
# CONFIG_I2C_DESIGNWARE_PLATFORM is not set
# CONFIG_I2C_DESIGNWARE_PCI is not set
# CONFIG_I2C_EMEV2 is not set
CONFIG_I2C_GPIO=m
# CONFIG_I2C_NOMADIK is not set
# CONFIG_I2C_OCORES is not set
# CONFIG_I2C_PCA_PLATFORM is not set
# CONFIG_I2C_PXA_PCI is not set
CONFIG_I2C_RK3X=y
# CONFIG_I2C_SIMTEC is not set
# CONFIG_I2C_XILINX is not set
```

.config

\$(KERNEL\_PATH)/drivers/i2c/buses/  
Makefile

```
obj-$(CONFIG_I2C_PXA_PCI) += i2c-pxa-pci.o
obj-$(CONFIG_I2C_QUP) += i2c-qup.o
obj-$(CONFIG_I2C_RIIC) += i2c-riic.o
obj-$(CONFIG_I2C_RK3X) += i2c-rk3x.o
obj-$(CONFIG_I2C_S3C2410) += i2c-s3c2410.o
obj-$(CONFIG_I2C_SH7760) += i2c-sh7760.o
obj-$(CONFIG_I2C_SH_MOBILE) += i2c-sh_mobile.o
obj-$(CONFIG_I2C_SIMTEC) += i2c-simtec.o
obj-$(CONFIG_I2C_SIRF) += i2c-sirf.o
```





# Check CONFIG Setting

## » In Kernel Source

» [CMD] `cat .config | grep ${CONFIG_NAME}`

## » In Run Time Environment

» [CMD] `cat /proc/config.gz | zcat | grep ${CONFIG_NAME}`