

OTHER SURFACES 6.3

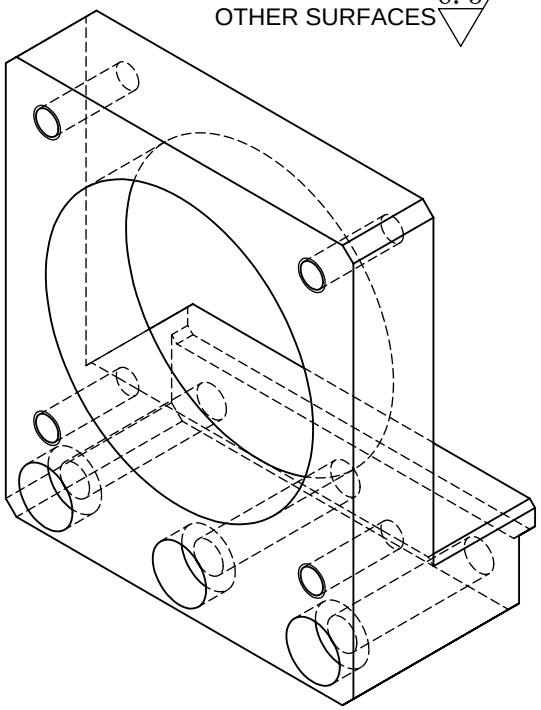

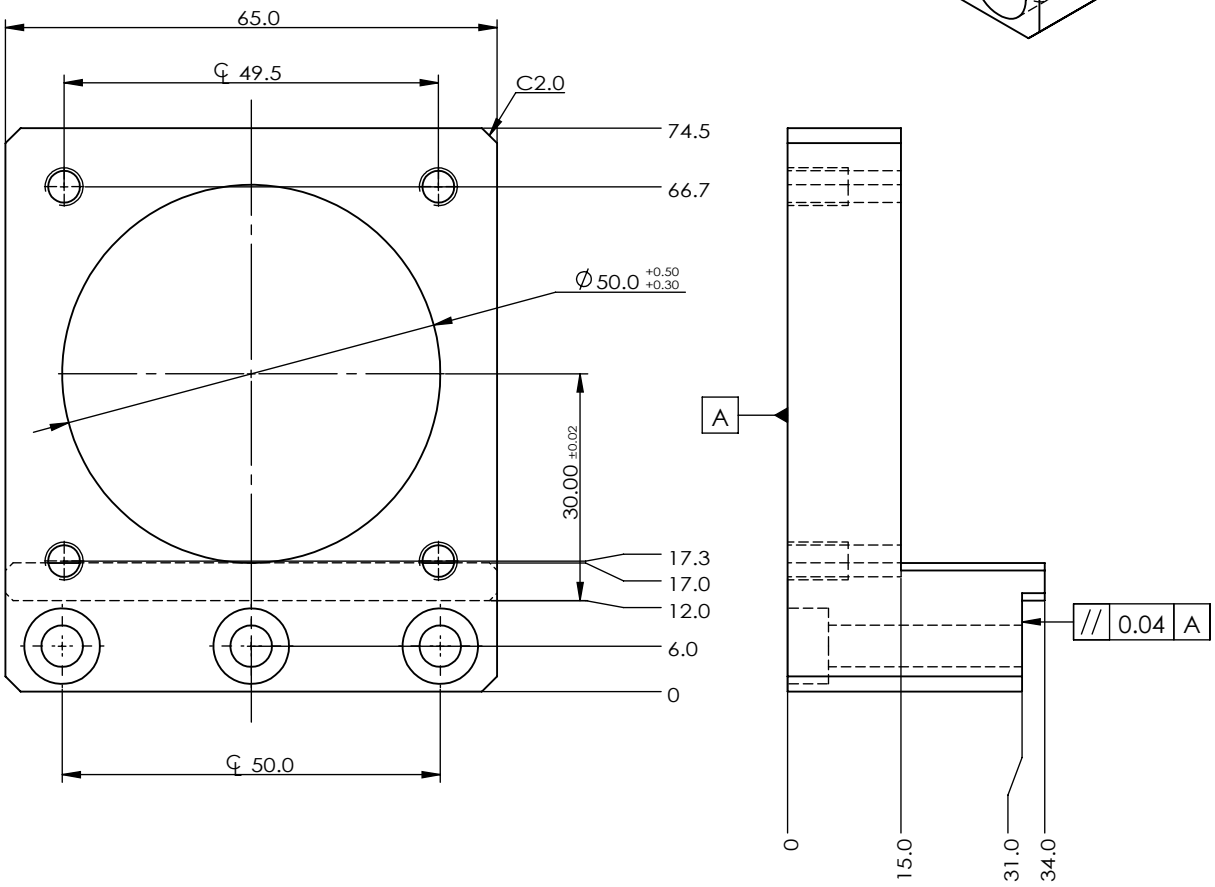

TECHNICAL REQUIREMENTS
1. Surfaces shall be smooth and free of burrs, flash, dents and other defects.
2. All holes without a specified depth are through holes.
3. If the material is 45#, apply electroless nickel plating, thickness 3-5um. All dimensions apply after nickel plating.
4. Break sharp edges. Unspecified chamfers: C0.5.
5. Unspecified geometric tolerances: refer to GB/T1184-K.
6. Machine unspecified dimensions according to the digital model.

EQUIPMENT NAME	Contact PIN INSERTION EQUIPMENT
EQUIPMENT NO.	
APPROVED	
BARCODE	

GENERAL TOLERANCES (UNLESS OTHERWISE SPECIFIED)

X.	± 0.5	X.°	± 1°
.X	± 0.2	.X°	± 0.5°
.XX	± 0.05	.XX°	± 0.1°
.XXX	± 0.01	.XXX°	± 0.01°

For sheet metal, welding, casting, stamping and similar processes, unspecified linear and geometric tolerances shall conform to in-house standards.

MATERIAL	S45C
FINISH	ELECTROLESS NICKEL PLATED
QTY	
CHECKED	
DESIGNED	
DRAWN	
DRAWING NO.	

SCALE	SHEET	REV.
1:1	1/1	X01