
R1100S/R1150

Lambdgrayifter 2.0 On the Air (OTA)

handling instructions

10/22/2022

V2.0



legend



Attention!

Describe possible damage to the vehicle or device.



information

Describe precautions related to the normal operation of the device.

Table of Contents

1. Feature	3
2. Specification	4
3. Install	5
3.1 Device.....	5
3.2 Body.....	5
3.3 Device cable color and connection destination	6
4. WiFi Connection	7
4.1 AP mode	7
4.2 Client mode.....	8
5. Device Operation	10
5.1 Realtime Graph.....	10
5.2 Logging.....	11
5.3 Shift Votage.....	12
5.4 ECU MAP (option).....	13
5.5 WiFi Mode	13
5.6 Firm/File Version	14
6. Appendix.....	15
Appendix: Map Switching by Coding Plug.....	17
Appendix: Operation Checklist.....	18
Appendix: O2 sensor specifications and measurement results.....	19
Appendix: Development Resources/Development Environment.....	21
Appendix: Frequently Asked Questions	22
Appendix: Contact Information.....	23
Appendix: License Information.....	24

1. Feature

This device is intended for Moronic 2.4 ECUs equipped with a narrowband O2 sensor to adjust fuel in the cruise range at low-mid RPM and low load to improve driving characteristics. In the stock condition, the closed-loop air-fuel ratio is fixed at 14.7 to comply with environmental regulations. With this device, it can be set richer to about 13.7.

The benefits of making it richer are as follows

- Idling stability
- Improved mid- to low-speed torque
- Improved throttle response in cruising range
- Decrease in engine temperature


All other functions of the device can be controlled by a smartphone or other wireless LAN-compatible device.



<- Click to reload.

Item	Current	Action
Realtime Graph	-	30sec 2min
Logging <small>*Limit: 180min.</small>	ON	Switch / Download
Shift Voltage (V:AFR)	0.20	SET 0.20:15.1 ▾
ECU MAP <small>*Option *After set turn off/on kill-switch.</small>	MAP3	SET MAP3 ▾
WiFi Mode	Client	Edit
Firm / File Version	2.0.8 / 2.0.5	Update

*Values for "Shift_Voltage" and "ECU MAP" are stored in the device.
*Device logs are saved when "ON" and can be downloaded afterwards.

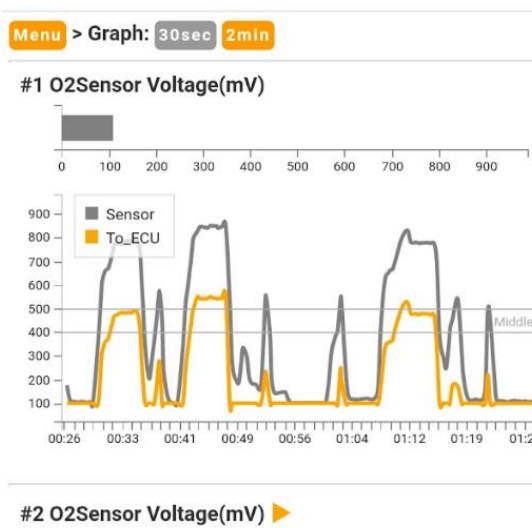

Refer to the following documents for closed-loop and open-loop ECU control and ignition timing adjustments.

English version


<https://drive.google.com/file/d/1yzwXpZE8MO3YYsV9nFuAE6dRmlb3xPf2/view?usp=sharing>

Japanese (language) version

<https://drive.google.com/file/d/17E6WIj0e4-W8HM2w7mWsXGhC5LxRpZIZ/view?usp=sharing>

This device and software are released under the MIT License. For details, see "Appendix: Development Resources and Development Environment" and "Appendix: License Information."

2. Specification

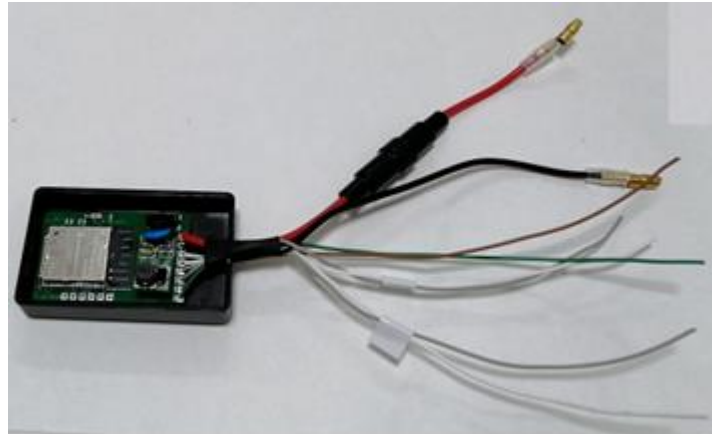


(data) item	Contents
Size (mm)	58 × 36 × 16
weight	40g(including cable)
Supply voltage	9v to 20v
Operating temperature range	-20 to 80°C
Power consumption	Average 80mA Maximum 500mA
Waterproof level	Waterproof for life
Number of input sensors	2
Sensor input range (error)	100 to 1000mV (±1%)
Voltage output range (error)	100 to 900mV (±1%)
Wi-Fi	802.11 b/g/n (HT40)
Supported Browsers	Google Chrome 56 or later
Recommend Display Size	Above 400px × 800px

3. Install

3.1 Device

Referring to the wiring diagram, connect the O2 sensor to the power supply and install the device in the appropriate location.

Connection to coding plug is an option for ECU chip connection switching.

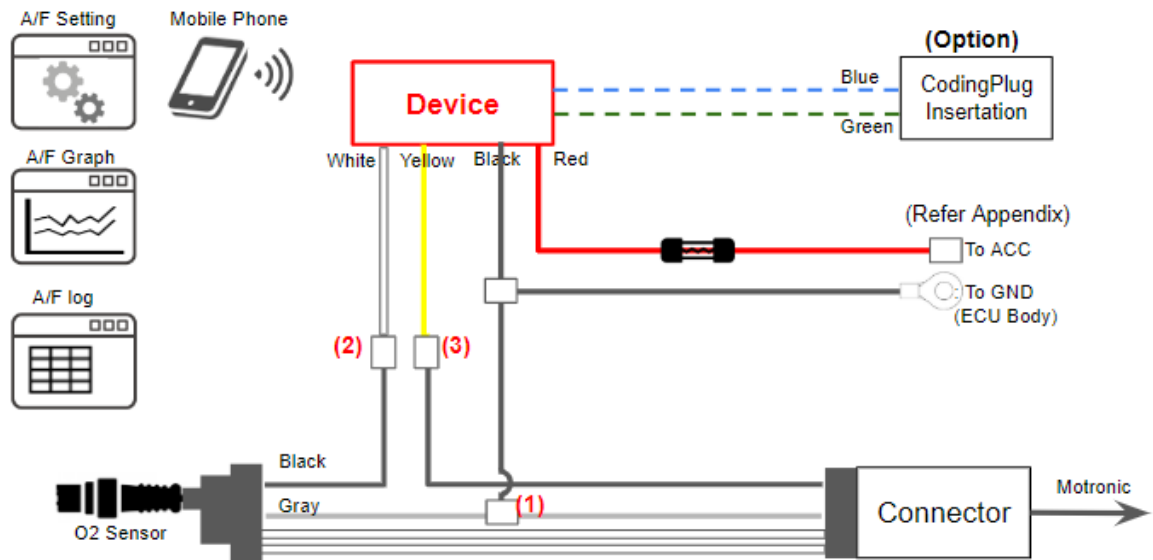

3.2 Body

- Connect the power supply (red/black) of the device referring to the wiring diagram and Appendix.
- Connect an electro-tap to the gray cable of the sensor and connect it to the black of the device*(1)
- Disconnect the black cable of the O2 sensor from the stock O2 sensor and connect the O2 sensor side to the white side of the device. *(2)
- Connect the black cable of the vehicle body side to the yellow cable of the device. (3)
Connect the black cable to the yellow cable of the device.
- Use a flat type (250 type) terminal to insert into the coding plug. Fix the cable so that it will not come loose.

3.3 Device cable color and connection destination

Device Cable Color	access point	(Reference) Internal connection pins
red	12v(ACC)	2(VIN+)
Black	Grounding of the vehicle body. Negative battery terminal recommended.	1(GND)
white	Black cable of O2 sensor. Sensor side	35
gray	Black cable of O2 sensor. Body side	25
brown	No. 86 terminal of coding plug	18
green	No. 87 terminal of coding plug	19



Attention!

- Install in a location near the O2 sensor and that meets the specifications at the time of use.
ex) No direct exposure to rain. No direct heat transfer from the engine.
- Do not connect the power supply in reverse. The fuse will blow or internal power supply parts will be damaged.
If damaged, the device must be disassembled and either the fuse, regulator, or diode replaced.
- Do not short-circuit the power supply and the white/gray/brown/green cable. The chip inside the device will be damaged.
Discontinue use and remove the device if there is a possibility of internal chip damage due to possible heat generation.
- Do not short-circuit the cables of the device to each other or to metal parts of the car body while the power is turned on.

4. WiFi Connection

This device provides two Wi-Fi connection methods.

4.1 AP mode

Initial state of this device. The device is made an access point and connected from the smartphone side.

The settings are listed on the face of this device. Settings cannot be changed.



*Example of WiFi connection information for devices, connection direction

- (1) Turn on the power to the vehicle and connect to the device's SSID with a smartphone or other device.
- (2) Open browser and. Access <http://10.1.1.1/> The menu of this device is displayed..
→ If you cannot connect, turn off the mobile line.

The screenshot shows the Lambda Shifter web interface. At the top, there is a header with the Lambda Shifter logo and a link to click to reload. Below the header is a table with three columns: Item, Current, and Action.

Item	Current	Action
Realtime Graph	-	30sec 2min
Logging <small>*Limit: 180min.</small>	OFF	Switch / Download
Shift_Voltage (V:AFR)	Disable	SET Disable
ECU MAP <small>*Option *After set turn off on kill-switch.</small>	MAP1	SET MAP1
WiFi Mode	Client	Edit
Firm / File Version	2.0.8 / 2.0.5	Update

*Values for "Shift_Voltage" and "ECU MAP" are stored in the device.
*Device logs are saved when "ON" and can be downloaded afterwards.

Every time the device is turned on, Wi-Fi reconnection is required. In addition, there are some models that cannot use a mobile connection at the same time.

The following client modes allow simultaneous use of WiFi reconnection-free and mobile lines.

4.2 Client mode

Connect to the smartphone from the device side using the smartphone's tethering function.



- (1) Connect to the device in AP mode.
- (2) Click "WiFi Mode" on the menu, then "Edit".

Lambda Shifter
OTA ver2.0

← Click to reload.

Item	Current	Action
Realtime Graph	-	30sec 2min
Logging <small>*Limit: 180min.</small>	OFF	Switch / Download
Shift_Voltage (V:AFR)	Disable	SET Disable ▾
ECU MAP <small>*Option *After set turn off/on kill-switch.</small>	MAP1	SET MAP1 ▾
WiFi Mode	Client	Edit
Firm / File Version	2.0.8 / 2.0.5	Update

*Values for "Shift_Voltage" and "ECU MAP" are stored in the device.
*Device logs are saved when "ON" and can be downloaded afterwards.

- (3) Enter the SSID, password, IP address, and gateway for tethering on your smartphone

Menu > WiFi Client settings

Item	Contents
Status	WiFi:OK / Gateway:OK / Internet:OK
SSID	TEST-SSID001
Password	Password1234 Hide
Device IP address	192 . 168 . 43 . 100
Subnet Mask	255 . 255 . 255 . 0
Gateway Address	192 . 168 . 43 . 1
Action	SET(Restart)

*These settings are for connecting from a device to a mobile phone or other device.
*If you do not know the connection destination setting, DO NOT CHANGE.

Parameter	Android	iPhone
SSID	Adapt to Smartphones	Adapt to Smartphones
Password	Adapt to Smartphones	Adapt to Smartphones
IP	192.168.43.10	172.20.10.5
Subnet	255.255.255.0	255.255.255.240
Gateway	192.168.43.1	172.20.10.1

*Setting example. Separate investigation is required for some models.

- (4) click the "Set(Restart)" button.
- (5)After activating tethering on your smartphone, turn on the ignition.
- (6)Go to [http://\[ip set for device\]/](http://[ip set for device]/).

→The menu of this device will be displayed.

From the next time onward, only steps (5) and (6) need to be performed to connect to the device.

information

If the menu is not displayed

Turn off tethering on the smartphone, turn off/on the device, and then reconnect in AP mode.

Check the Status of Wi-Fi Setting and modify the settings as follows.

Wi-Fi: **NG**

SSID or password is incorrect.

Wi-Fi: **OK** Gateway: **NG**

Incorrect IP or gateway settings.

Reference: Wi-Fi: **OK** Gateway: **OK** Internet: **NG**

Device connection is normal. Smartphone is not connected to the Internet.


5. Device Operation

This device is operated entirely via smartphone or PC. The operation methods are as follows

5.1 Realtime Graph

By selecting "30sec" or "2min" in the Realtime Graph line of the menu, the sensor voltage input/output of the device can be checked in real time.

Item	Current	Action
Realtime Graph	-	30sec 2min

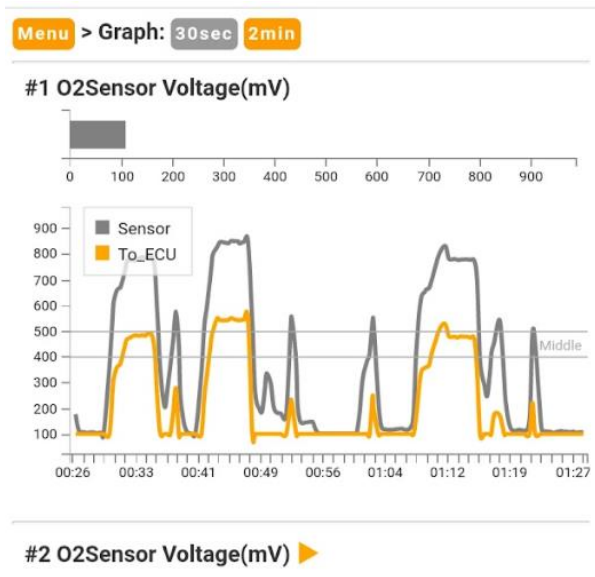

The gray bars and lines are inputs to the O2 sensor and the orange lines are outputs to the ECU.

When the orange line is below 400 mv, the ECU determines that the fuel is lean; when it is above 500 mv, the ECU determines that the fuel is rich.

If two O2 sensors are connected, the second graph can be displayed by selecting "▼".

information

The characteristics of the narrow band O2 sensor are as follows

- Normal is a state of constantly going back and forth between rich and lean. See "Appendix O2 Sensor Specifications" for details.
- When cold (oil temperature/water temperature below 60°C), it becomes thicker.
- When idling and cruising, it goes back and forth between a thick/thin state.
- The dark state continues when the accelerator pedal is opened wide.
- When the accelerator is closed above 2000 rpm, the fuel cutoff results in a thin state.
- If the above operation does not occur even when the engine is warm, check the O2 sensor by referring to the "Appendix Operation Checklist".

5.2 Logging

Tap "Switch" in the Logging row to toggle the status on and off.

Logs are recorded in the "ON" state and logs in CSV format are downloaded by tapping "Download" at the appropriate timing.

Item	Current	Action
Realtime Graph	-	30sec 2min
Logging <small>*Limit: 180min.</small>	ON	Switch / Download
Shift_Voltage	0.20	SET 0.20 15 1 ▾



information

- The file should be downloaded before the ignition is turned off. Logs are deleted when the device is turned off.
- If the logs exceed the device's storage limit, access will be disabled from smartphones.

5.3 Shift Votage

This function changes the sensor voltage output to the ECU and adjusts the amount of fuel injection. Default is 14.7.

This setting value is saved in the device, so there is no need to display the setting screen each time.

In the "Shift Voltage" line, select the shift voltage (AFR). Tap "SET".



information

The "Disable" mode outputs 0.45 V to the ECU regardless of the sensor input and turns off the closed loop.

Attention!

- If the air-fuel ratio is made lean, the oil temperature and plug burning should be monitored. Risk of engine blowout due to heating.
- If "-0.37 (13.7)" or "0.30 (15.3)" is selected, the error with the actual A/F ratio may be larger. This is because the stock narrow band O2 sensor is only intended to detect 14.7.
- Motronic 2.4 has a learning function that reflects the results of closed-loop trimming to the open loop. The reflection is usually completed after 200 to 300 km of driving.

5.4 ECU MAP (option)

Ability to switch ECU maps by connecting specific pins of the coding plug to GND.

This setting value is saved in the device, so there is no need to display the setting screen each time.

In the "ECU MAP" line, select a map. Tap "SET".



Attention!

- This function assumes ECU map rewriting and coding plugs for BMW shipment region switching.
- See "Appendix 1" for map rewriting.

5.5 WiFi Mode

Refer to "4. How to connect to WiFi".

5.6 Firm/File Version

Displays the current firmware and web screen version. Clicking "Update" will take you to the firmware and file upload screen. This function is used to modify software, calibrate sensors, or add functions after installation.

Select "Firmware" when uploading "firmware.bin" and "Filesystem" when uploading "spiffs.bin".



Firm / File Version	2.0.8 / 2.0.5	Update
---------------------	---------------	--------

Menu > Software Uploader

Software Uploader

☒ Firmware ☐ Filesystem

Choose File No file chosen

9E9EF0C8 - ESP32



Attention!

- Uploading should be done only when necessary as a result of an inquiry.
- Do not divert files from other devices, as firmware and file systems vary from device to device.
- Select the correct Firmware and Filesystem. If you make a mistake, you will need to re-upload the file again.

6. Appendix

Appendix: Device Power Connection Example

Connection of GND and sensor gray

- The black cable of the device is connected to the GND of the car body and gray cable of the O2 sensor.
- The black cable of the device should be connected to the GND of the car body and the gray cable of the O2 sensor.
- Use an electro-tap for the O2 sensor gray cable. (Refer to "Electro-tap Connection Example" in this section.

ACC power supply

Connect the red cable of the device to the ACC power supply of the car body. (See "Electro-tap Connection Example" in this section.

The following is an example of interrupting the R1100S brake switch cable (yellow).




Attention!


- Electrotap must be used correctly. Poor contact may occur and the device may not operate properly.

Electro-tap connection example

Use a cutter or similar tool to shave the sheath of the cable to be connected. The cable on the device side is folded back after shaving the sheath at the end.

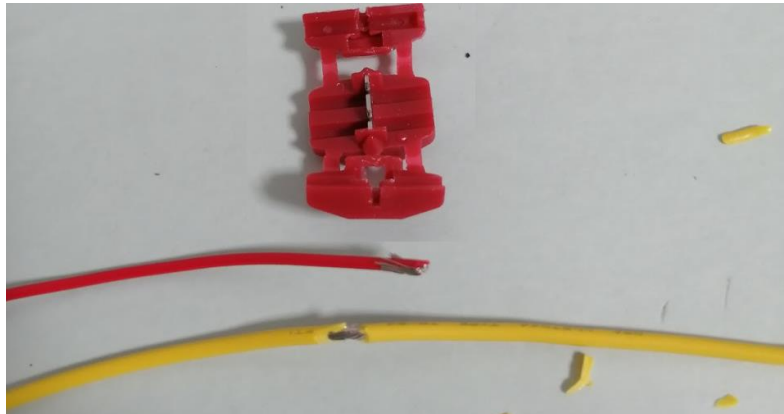

Place the cable so that the wire part touches the metal part in the center of the ElectroTap as shown below.

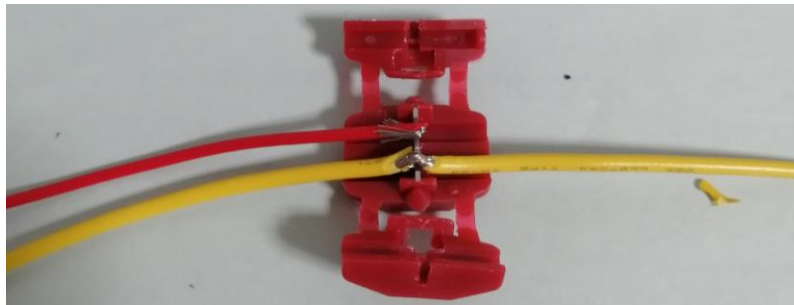

Use pliers, etc., to clamp the ElectroTap until it snaps into place.




Cover the ElectroTap with vinyl wiring tape, etc.




Appendix: Map Switching by Coding Plug

Flat terminals are attached to the brown and green cable ends of the device and connected to the coding plug insert on the car body to be used as a map switching switch for the ECU.

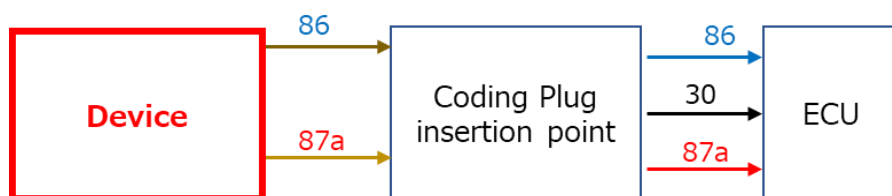

Connection	Map
None	1
30-86	5
30-87a	3

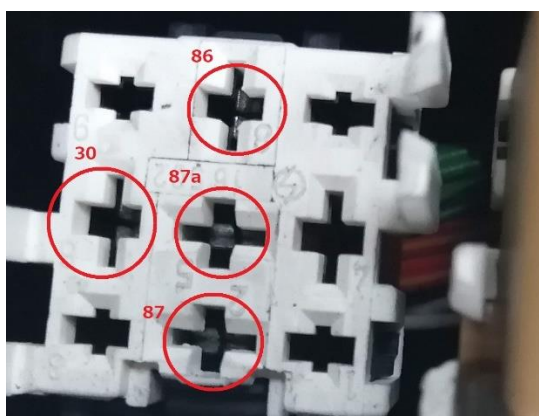

information

- **(Important) Turn the ignition ON with the kill switch OFF, then turn the kill switch ON and start the engine.** Because the ECU needs to be reloaded to reflect the map.
- Since there is no significant difference in the stock map when switched, we recommend replacing the EPROM chip in the ECU. (Refer to "5.2. ECU Chip Replacement" and "Appendix 3 Switching Maps by Coding Plug" in the URL below.

English version

<https://drive.google.com/file/d/1yzwXpZE8MO3YysV9nFuAE6dRmlb3xPf2/view?usp=sharing>

Japanese (language) version

<https://drive.google.com/file/d/17E6WIj0e4-W8HM2w7mWsXGhC5LxRpZIZ/view?usp=sharing>

Appendix: Operation Checklist

The stand-alone device is disconnected from the body of the vehicle, while the combined device is fully installed.

category	No		check	Cause / Remarks
frame	1	Use an ECU diagnostic tool such as GS911 to check for errors.		Resolve errors before device installation
	2	Disconnect the O2 sensor connector, attach a voltmeter to the pin on the body side, and check for the following voltages Black - Car body (GND): around 0.58v Gray to car body (GND): around 0.14v		If the voltage deviates significantly from the reference, ECU failure
	3	O2Heat the sensor to 800°C with a gas burner or the like, and see if there is a voltage of about 0.1-0.15v between the black and gray cables.		If it does not operate normally, O2 sensor is abnormal.
	4	When the ignition is turned ON, does the fuel pump run for about 3 seconds and then stop?		If not working properly, poor connection (grounding) of (disconnected) gray cable in body.
device	5	Does the device's SSID appear when the vehicle is turned on?		If not displayed, poor power connection or device failure.
	6	Check the device graph to see if the O2 sensor input status is correct*.		If the device does not work properly, it is either damaged inside the device or the program is faulty.
	7	Is the black-to-gray voltage 450 mv ($\pm 1\%$) when the device's air-fuel ratio setting is set to "disable"?		If the device does not work properly, it is either damaged inside the device or the program is faulty.
	8	When the device map is switched, is the resistance between cables as follows? MAP2: 0 Ω between brown and black MAP3: 0 Ω between green and black		If the device does not work properly, it is either damaged inside the device or the program is faulty.

Appendix: O2 sensor specifications and measurement results

The ECU in the R1100S (R1150) uses a BOSCH Step change (narrow band) O2 sensor to adjust fuel.

Although ECU specifications are not disclosed, the output of this device to the ECU was determined based on the specifications of the BOSCH narrowband O2 sensor and the voltage measurements of the ECU.

The BOSCH O2 sensor documents referenced are as follows.

https://www.boschaftermarket.com/xrm/media/images/country_specific/sg/services_and_support_6/downloads_18/lambda_sensors.pdf

----- Quote: -----

Step-change sensors detect the "stoichiometric mixture" ($\lambda = 1$) and compare the residual oxygen content of the exhaust gas with the oxygen content of the ambient air. They detect the transition from rich to lean air/fuel ratio and vice versa. Depending on the oxygen content of the exhaust gas, they generate a voltage of approx. 20 to 900 mV.

Check signal profile - step-change sensor:

- *Control sensor signal oscillates between approx. 0.1 and 0.9 V*
- *The larger the control-sensor voltage boost, the better the signal*
- *The lower the voltage boost of the diagnostic sensor, the better the condition of the catalytic converter*
- *Frequency between 0.3 and 3 Hz*
- *Voltage < 0.4 V → lean mixture*
- *Voltage > 0.5 V → rich mixture*

Check control unit:

- *Is the reference voltage 450 mV?*

Check the power supply of the lambda sensor heater

Check the actual values of the lambda sensor heater using a diagnostic tester.

There must be a constant power supply of 10.5 to 13.5 V. Is the power supply OK?

measurement results

The measurement results of the sensors, ECUs, etc. involved were as follows.

- ECU black-GND: around 0.59v
- ECU gray-GND: around 0.14v
- ECU black-gray: around 0.45v

*This value is consistent with the BOSH reference voltage.

- O2 sensor when warm, black gray: around 0.14v

*O2Heat a single sensor to about 1000°C by roasting it with a gas burner.

- GSS911 O2 sensor when cold: 0.45v
- GSS911 O2 sensor when warm: 0.14v
- LC-2 cold analog output: 0.45v
- LC-2 warm analog output: 0.14v

Guess the ECU's fuel adjustment logic

- To determine the failure of the O2 sensor, a potential difference of 0.45v is measured in black and gray.
- The ECU uses the O2 sensor's $\lambda=1$ (A/F 14.7) as threshold and three voltages as inputs: dark (below 0.4v), light (above 0.5v), and intermediate (0.4v-0.5v).
- By appropriately shifting the voltage input to the ECU, the A/F can be controlled.

Relationship between voltage shift value and A/F

Using LC-2 (air-fuel ratio logger with broadband O2 sensor) on a stock 98 R1100S, we measured the relationship between the voltage shift of the narrowband O2 sensor and the air-fuel ratio

Shift Voltage	A/F
-0.30	15.3
-0.20	15.1
-0.10	14.9
0.00	14.7
0.10	14.5
0.20	14.3
0.30	14.0
0.37	13.7

However, these figures are approximate and may vary depending on individual bodywork and customization of intake and exhaust systems, etc.

If the shift value exceeds -0.4v - 0.4v, the operating range of the O2 sensor becomes significantly narrower, resulting in a larger A/F ratio error.

Appendix: Development Resources/Development Environment

Development Resources

<https://github.com/y23tanaka/LambdaGrayifier2.0/>

development environment

- Windows10 / VSCode / PlatformIO
- Arduino(C++) / HTML5 / Javascript
- Design Spark

Appendix: Frequently Asked Questions

- **Why does the sensor input value not fall below 120 mV?**

This is a device specification. It does not affect the operation.

- **Why does the output value not exceed 900mV/not fall below 100mV?**

This is for ECU protection. Does not affect operation.

- **Can it be manipulated by someone else who has the same device?**

Very difficult, because SSID and password are different for each device.

- **Browser communication is not encrypted.**

Specifications. As long as the radio is encrypted, it is very difficult to intercept.

- **Weak wireless signal**

Adjust the installation position so that there is no metal between the device and the smartphone or other device that will receive the radio signal.

- **What happens if the logging time exceeds 120 minutes?**

Web access to the device may become unavailable. The voltage adjustment function operates normally. Reboot the device by turning off the ignition once, etc. If the device is rebooted, the log file will be lost.

- **Lost information to access the device.**

Please contact us and we will need your SSID (serial number) or the information of the purchaser.

- **Are there any fire or other hazards?**

The possibility is very low because we are dealing with a weak signal for the sensor. The design of the device is such that when the power supply is connected in reverse, the fuse will blow and the protection circuit inside the device will break if an overvoltage is applied. If an abnormal voltage is applied to the sensor, the internal IC will be damaged.

- **I want to change the design of the graph or add a function.**

Depends on the contents. In principle, we will charge a fee for this service.

- **I would like the menu text to be larger/smaller.**

This is difficult because the site is intended to be accessed from multiple environments, such as mobile phones and PCs. Adjustments for specific environments can be made for a fee.

Appendix: Contact Information

Inquiries about hardware and software design

<https://github.com/y23tanaka/LambdaGrayAfter2.0/>

Inquiries about usage and acquisition channels

<https://www.facebook.com/yosuke.tanaka.169>

y3tanaka@gmail.com

Appendix: License Information

This document, software, hardware, and linked works are copyrighted by Yosuke Tanaka. Handling conforms to the following MIT license format.

-----License Term-----

Copyright 2022 Yosuke Tanaka

Permission is hereby granted, free of charge, to any person obtaining a copy of this software , hardware and associated documentation files (the Permission is hereby granted, free of charge, to any person obtaining a copy of this software , hardware and associated documentation files (the "Device"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribubrownny person obtaining a copy of this software , hardware and associated documentation files (the "Device"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Device, and to permit persons to whom the Device is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE DEVICE OR THE USE OR OTHER DEALINGS IN THE DEVICE.