

Tekintools MF90 series PCD standard milling cutter



Laser machining cutting edge new technology

Laser machining cutting edge quality is much higher than traditional grinding, no wear, no carbonization phenomenon, and can maintain the integrity of the cutting edge in long time processing, as well as the consistency of the surface roughness, improve the tool life and production efficiency.

Better quality and high efficiency milling

No matter what type of milling you are facing, or you want to learn how to improve efficiency, stability and tool life, Tekintools can provide high efficiency and significant performance milling solutions to help you achieve cost-saving and industry upgrading purpose.



Face milling cutter product patent:

*Face milling cutter appearance patent (2020301184526).

*Face milling cutter module with internal cooling and face milling cutter connection part utility model patent. (2020204439428).

MF90 series milling cutter advantages

- ① MF90 milling cutter not only can meet customer's variety of surface quality request, but also can different milling way, such as end face milling, square shoulder milling, continuous milling, interrupted milling and other special milling way.
- ② This series possess high stability and it is applied for machining in high feed rate.
- ③ Mainly applied for finish machining. Convenient and efficient operation. Milling cartridge can be located fastly.
- ④ Supply for milling cutter customized service and cartridge regrind service.



High strength aluminum milling cutter possess lighter weight






technology brings better performance



The shape of tips can be changed according to customer's request




Supply for regrinding and retipping service

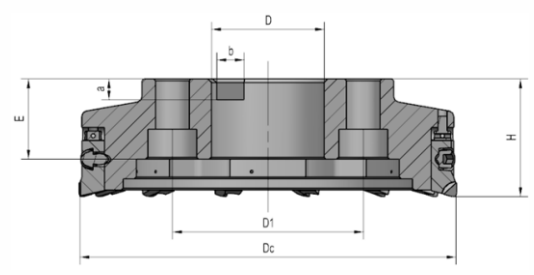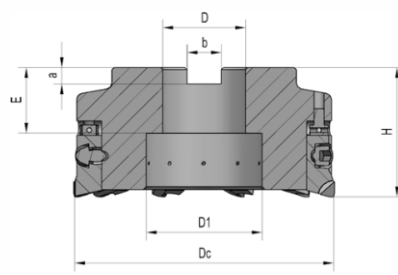

Specification 1			Specification 2				Specification 3				
Model	Parameter									weight (KG)	Stock
	Dc (mm)	Z	D (mm)	D1 (mm)	D2 (mm)	E (mm)	b (mm)	a (mm)	H (mm)	Include accessory and cartridge	
MF90D063Z04	63	4	22	18	11	22	10.4	6.3	48	0.4	▲
MF90D080Z06	80	6	27	33	/	23	12.4	7	50	0.7	▲
MF90D100Z08	100	8	32	43	/	25	14.4	8	50	1.1	▲
MF90D125Z10	125	10	40	56	/	32	16.5	9	63	2.2	▲
MF90D160Z12	160	12	40	66.7	/	39.5	16.5	9	63	3	▲
MF90D200Z14	200	14	60	101.6	/	43	25.7	14	63	4.2	▲
MF90D250Z20	250	20	60	101.6	/	43	25.7	14	63	6.5	▲

MillCutter (parametersforcartridge)

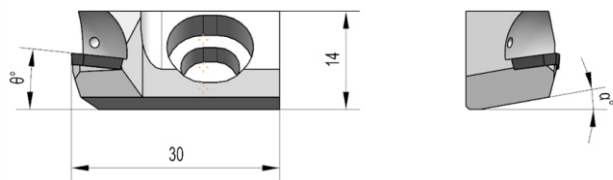

Face mill cutter cartridge	Type	Rake Angle θ (°)	Maximum cutting depth a_p (mm)	Tips Material
	MI30-750605-C	6	5	PCD
	MI30-750305-C	3	5	PCD
	MI30-750005-C	0	5	PCD
Shoulder mill cutter Cartridge	Type	Rake Angle θ (°)	Maximum cutting depth a_p (mm)	Tips Material
	MI30-900605-C	6	5	PCD
	MI30-900305-C	3	5	PCD
	MI30-900005-C	0	5	PCD
top-quality surface mill cutter Cartridge	Type	Rake Angle θ (°)	Maximum cutting depth a_p (mm)	Tips Material
	MI30-0605-J	6	5	PCD
	MI30-0005-J	0	5	PCD
Pt mill cutter Cartridge	Type	Rake Angle θ (°)	Maximum cutting depth a_p (mm)	Tips Material
	MI30-0005-PT	0	5	PCD

Recommended cutting condition for Mill Cutter

ISO	Workpiece material	Hardness	Cutting Speed V_c (m/min)	Feed Rate f_z (m/min)
-----	--------------------	----------	-----------------------------	-------------------------


Content of Si below 12.6%

N	Al alloy	-	1500 - 2000 - 3000 (Floor-recommend-caps)	0.05 - 0.10 - 0.20 (Floor-recommend-caps)
---	----------	---	--	--

Content of Si above 12.6%

N	Al alloy	-	600 - 1000 - 1500 (Floor-recommend-caps)	0.05 - 0.10 - 0.20 (Floor-recommend-caps)
---	----------	---	---	--

Accessories of Mill Cutter

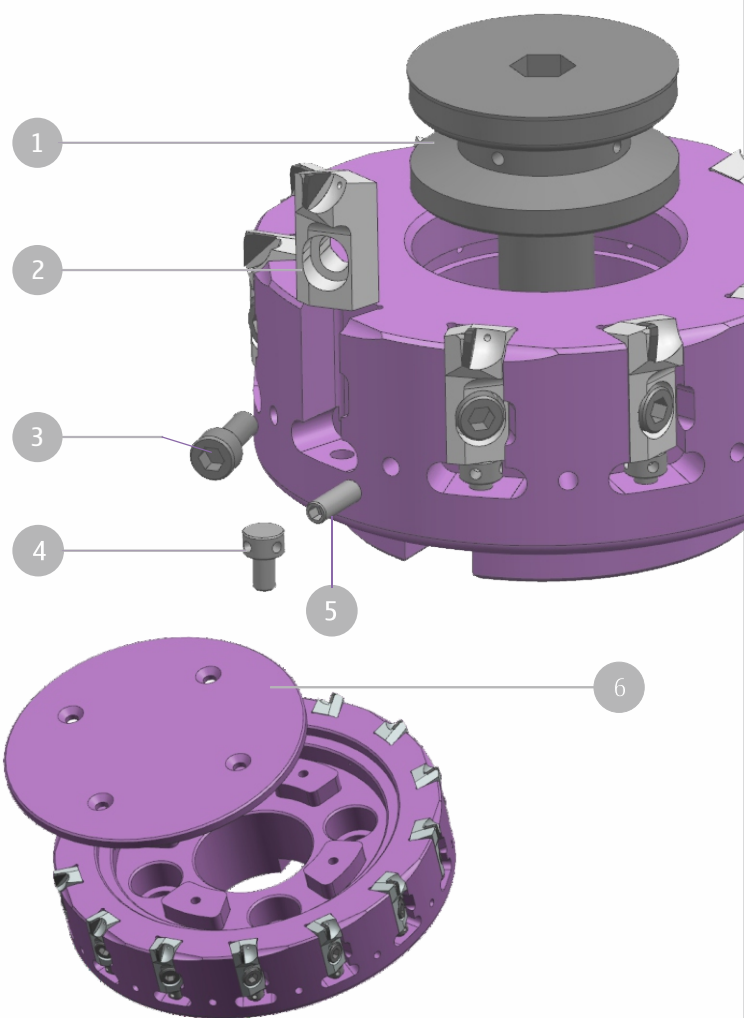

Sketch	No.	Name	Material	Type
	1	Forcing screw (Used for under $\Phi 160$)	Steel	
	2	Cartridge	Steel+PCD	
	3	hexagon socket cap screws (house cartridge)	-	M6×20
	4	Adjusting screws with hole (adjust screws)	-	M5×12
	5	Hexagon socket socket head screws (dynamic balancing)	-	M5×15
	6	End Housing (used for $\Phi 160$ or above $\Phi 160$)	Al alloy	



HENAN TEJIN SUPER-HARD MATERIAL CO., LTD.

Tel: +86 371 60300918

Mobile: +86 13937104872

E-mail: tekintools@163.com

Web: <http://www.tekintools.com/>

Address: 220255, Floor 13, Longyu International, Shangding Road, Dongfeng South Road, Zhengzhou Pilot Free Trade Zone (Zhengdong), Henan 450000, P.R. China.