




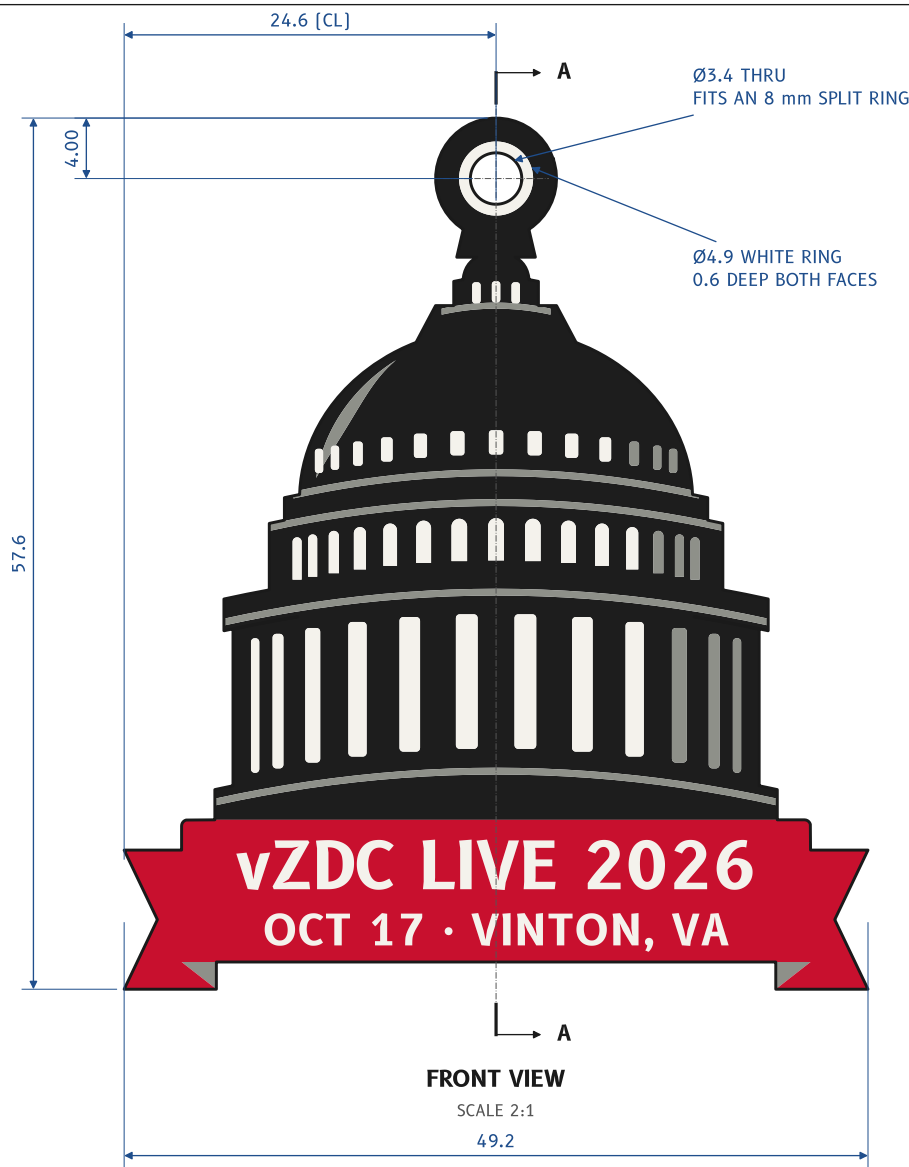


RIGHT SIDE
SCALE 2:1

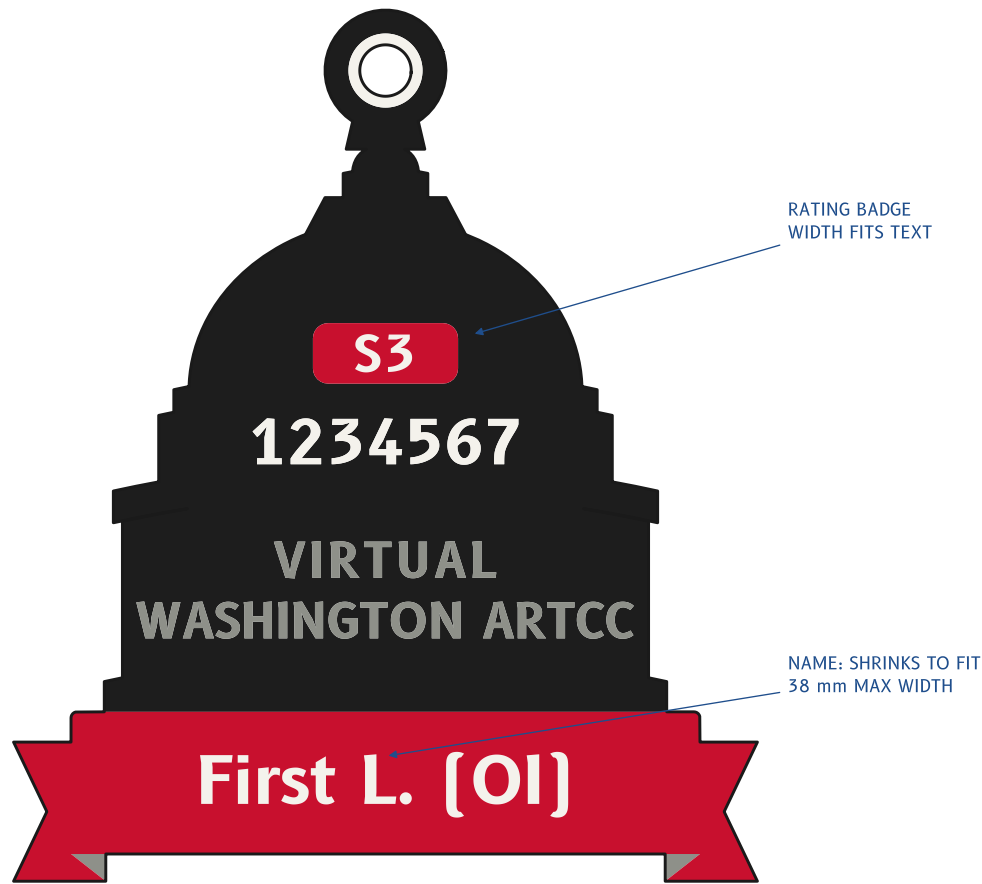

BACK VIEW
SCALE 2:1 · SAMPLE: First L. [OI]

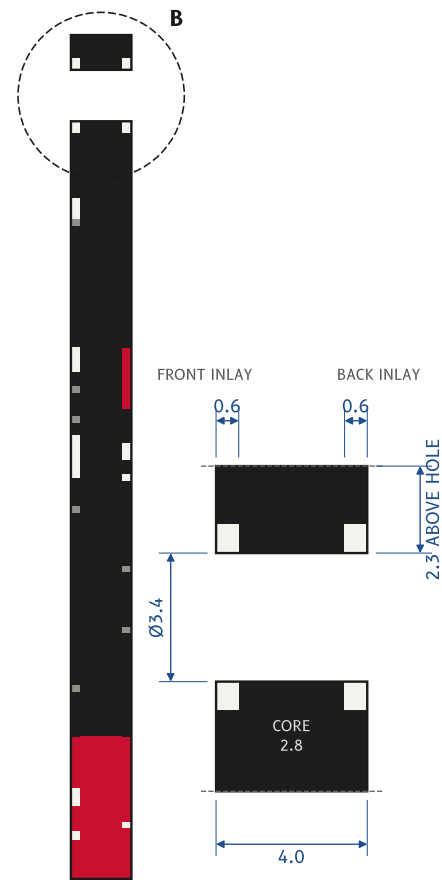

SECTION A-A
SCALE 2:1

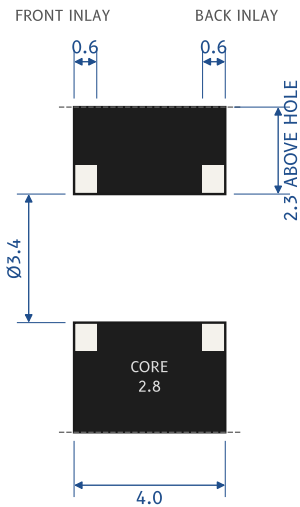

DETAIL B
HOLE AND LAYER STACK, SCALE 5:1



3D REFERENCE

Rendered from the print files.
Not to scale. Split ring shown
for reference, not printed.

NOTES

- Material: PLA [Bambu PLA Basic], 4 colors via AMS. Bambu Lab P2S, 0.2 mm nozzle.
- Print front face down on the plate. Layer height 0.1 mm. Iron the top [back] surface.
- Color inlays are flush, 0.6 mm [6 layers] deep on each face. Core 2.8 mm.
- Ribbon is red through its full thickness. All other core material is black.
- Minimum feature 0.55 mm. Minimum text cap height 1.8 mm.
- Back ribbon is one free text field per attendee; rating and CID optional. See attendees.csv.
- Dimensions in mm. General tolerance ± 0.2 unless noted.

SLOT	FILAMENT	WHERE	VOLUME	MASS
1	BLACK	Body, columns, dome	3879 mm ³	4.81 g
2	WHITE	Windows, hole ring, text	167 mm ³	0.21 g
3	GRAY	Lines, shading, ARTCC text	93 mm ³	0.12 g
4	RED	Ribbon [full depth], badge	1751 mm ³	2.17 g

Masses are the part only. Purge for color changes adds about 15 g per plate.

vZDC LIVE 2026 KEYCHAIN

Night Ribbon · Virtual Washington ARTCC · Oct 17 · Vinton, VA

SAMPLE: First L. [OI] · 1234567 · S3 · TOP: ORB

PART NO.
ZDC-KC-2026-01

SCALE
2:1 · DETAIL 5:1

UNITS / TOL.
mm · ± 0.2

DATE · SHEET
2026-09-29 · 1/1