




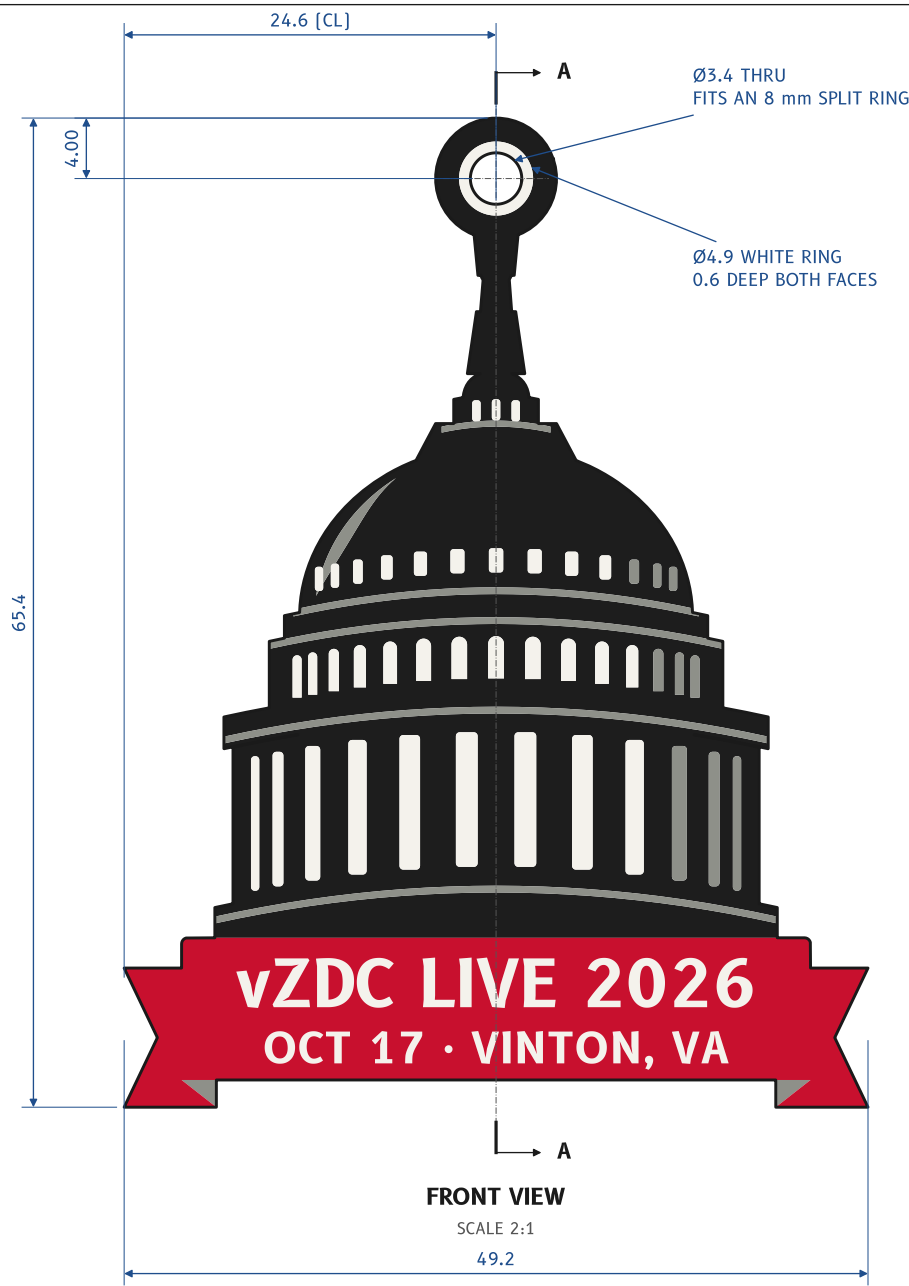

RIGHT SIDE
SCALE 2:1

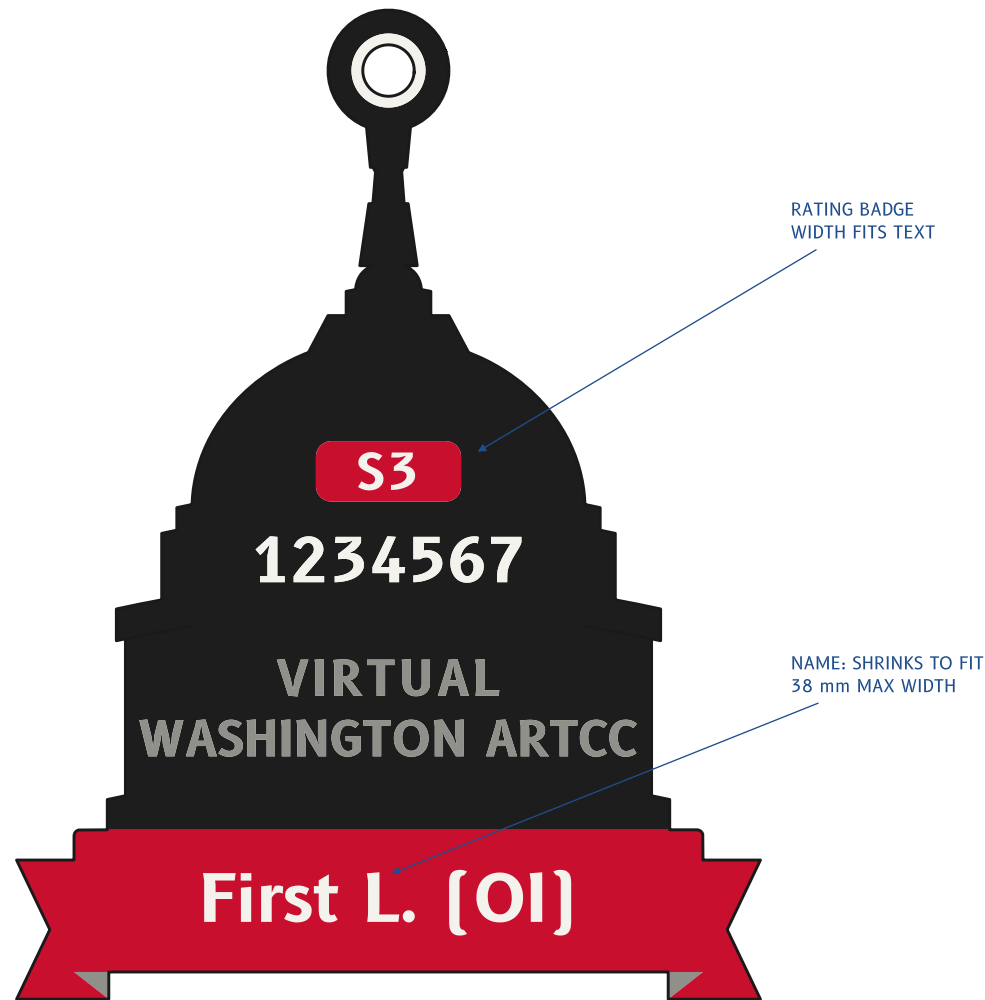

BACK VIEW
SCALE 2:1 · SAMPLE: First L. [OI]

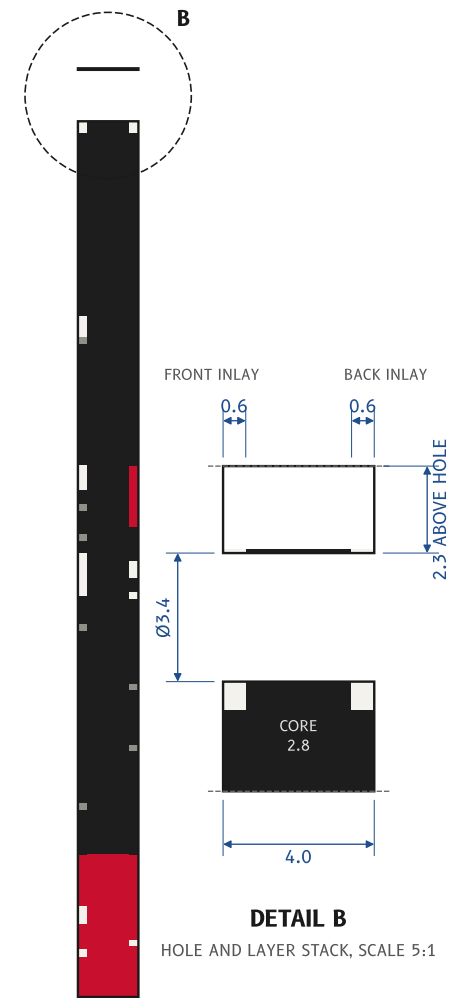

SECTION A-A
SCALE 2:1

DETAIL B
HOLE AND LAYER STACK, SCALE 5:1



3D REFERENCE

Rendered from the print files.
Not to scale. Split ring shown
for reference, not printed.

NOTES

1. Material: PLA [Bambu PLA Basic], 4 colors via AMS. Bambu Lab P2S, 0.2 mm nozzle.
2. Print front face down on the plate. Layer height 0.1 mm. Iron the top [back] surface.
3. Color inlays are flush, 0.6 mm [6 layers] deep on each face. Core 2.8 mm.
4. Ribbon is red through its full thickness. All other core material is black.
5. Minimum feature 0.55 mm. Minimum text cap height 1.8 mm.
6. Back ribbon is one free text field per attendee; rating and CID optional. See attendees.csv.
7. Dimensions in mm. General tolerance ± 0.2 unless noted.

SLOT	FILAMENT	WHERE	VOLUME	MASS
1	BLACK	Body, columns, dome	3949 mm ³	4.90 g
2	WHITE	Windows, hole ring, text	167 mm ³	0.21 g
3	GRAY	Lines, shading, ARTCC text	93 mm ³	0.12 g
4	RED	Ribbon [full depth], badge	1751 mm ³	2.17 g

Masses are the part only. Purge for color changes adds about 15 g per plate.

vZDC LIVE 2026 KEYCHAIN

Night Ribbon · Virtual Washington ARTCC · Oct 17 · Vinton, VA

SAMPLE: First L. [OI] · 1234567 · S3 · TOP: SPIRE

PART NO.
ZDC-KC-2026-01

SCALE
2:1 · DETAIL 5:1

UNITS / TOL.
mm · ± 0.2

DATE · SHEET
2026-09-29 · 1/1