



Jemena Electricity Networks (Vic) Ltd

Annual Network Tariff Report for 2010 Calendar Year

February 2010

Contacts

Inquiries relating to this Report may be directed to:

➤ Jemena Electricity Networks (Vic) Ltd

Nabil Chemali
Manager Commercial Strategy & Performance
Locked Bag 7000
Mount Waverley
VIC 3149
Telephone: 03 8544 9856
Email: Nabil.Chemali@jemena.com.au

or

➤ Australian Energy Regulator

360 Elizabeth Street
MELBOURNE VIC 3001
Telephone: 03 9290 1422
Fax: 03 9290 1457
Website: <http://www.aer.gov.au/>

Table of Contents

1	CURRENT TARIFFS	1
1.1	Regulatory Arrangements	1
2	DESCRIPTION OF PROPOSED TARIFFS	3
2.1	Tariff Structures	3
2.2	Tariff Categories.....	3
2.3	Parent Tariff and Sub Categories.....	4
2.4	Premium Feed in Tariff (PFIT)	5
2.5	Expected Changes in Tariffs	6
2.6	How Each Tariff Meets Upper & Lower Bounds.....	6
2.7	Future Investment Requirements.....	7
2.8	Excluded Service Charges	7
2.9	Re-assignments of Tariffs	8
2.10	Contract Demand Based Charges.....	8
3	USAGE & QUANTITY INFORMATION	9
3.1	Usage and Customer Numbers	9
3.2	Future Network Constraints	10
4	ANNUAL ADJUSTMENT VARIABLES	12
4.1	Adjustment Variables.....	12
4.2	Impact of Application of Adjustment Variables	12
5	RATIONALE FOR AMENDMENT	34
6	CONSULTATION	34
	APPENDIX 1 PROPOSED 2010 NETWORK TARIFFS (EXCLUSIVE OF GST)	35
	APPENDIX 2 PROPOSED 2010 DISTRIBUTION TARIFFS (EXCLUSIVE OF GST) ..	42
	APPENDIX 3 PROPOSED 2010 TRANSMISSION TARIFFS (EXCLUSIVE OF GST)	49
	APPENDIX 4 PFIT PASS THROUGH COSTS RATES (EXCLUSIVE OF GST)	56
	APPENDIX 5 EXCLUDED SERVICE CHARGES	63

1 CURRENT TARIFFS

1.1 Regulatory Arrangements

The Australian Energy Regulator (AER) has been established as an independent economic regulator, with the primary objective to protect the long term interests of consumers with regard to the price, quality and reliability of essential services.

Network tariffs incorporate the rates that apply to the customer's usage in order to calculate the charges payable to the distributor by the customer's retailer. They are the aggregate of two sets of tariffs namely Distribution Use of System (DUoS) and Transmission tariffs¹. DUoS tariffs are designed to recover the cost of distribution through the electricity network, whereas Transmission tariffs are designed to recover specific pass through costs incurred by the distributor to be passed through to customers. These 'Pass Through Costs' include:

- Transmission use of system (TUoS) charges payable to AEMO (formerly VenCorp) for each calendar year;
- Prescribed connection and excluded services transmission charges payable to SP AusNet for each calendar year;
- Payments to embedded generators during each calendar year; and
- Revenue earned for the calendar year from other distributors in respect of inter-network provider distribution service tariffs net of similar charges the distributor expects to pay other distributors during the same period.

DUoS and Transmission tariffs are subject to separate price controls as set out in the Electricity Distribution Price Review 2006-2010 Final Decision Volume 2 (Price Determination).

In addition when proposing tariffs², the distributor must have regard to the following pricing principles:

1. each tariff should be above the avoidable cost of serving the customers assigned to that tariff;
2. each tariff should be below the cost of providing the service on a stand alone basis to customers assigned to that tariff; and
3. each tariff should signal the impact of additional usage on future investment costs.

In its Price Determination³, the AER placed an obligation on each distributor to prepare and publish a public Annual Tariff Report, by no later than 40 business days prior to the end of the preceding calendar year. The report must conform to the template described in Attachment 10 of the Price Determination containing the following sections:

¹ For example if for a given tariff the DUoS rate is 5 ¢/unit and the Transmission rate is 2 ¢/unit then the network tariff rate would be 7 ¢/unit.

² Unless otherwise stated the term tariff means distribution tariff and transmission tariff

³ Electricity Distribution Price 2006-10 Final Decision Volume 2 Price Determination, Clause 2.3.18, Essential Services AER, Victoria, October 2005.

- Section 1: Current Tariffs;
- Section 2: Usage/quantity information;
- Section 3: Annual adjustment variables;
- Section 4: Rationale for amendment;
- Section 5: Consultation.

This report details the proposed tariffs applicable to customers connected to the Jemena Electricity Networks (Vic) electricity network for the calendar year 2010. These tariffs are yet to be approved by the AER and therefore should be used as a guide only. The approved tariffs will be published on the following website address:

<http://www.jemena.com.au/operations/distribution/JEN/>

2 DESCRIPTION OF PROPOSED TARIFFS

2.1 Tariff Structures

JEN has adopted the following three tariff structures:

- a) **General Purpose** – single rate tariff (¢/kWh) applicable for all times of the day with a fixed charge (known as a standing charge). This tariff generally applies to customers that have a single rate accumulation meter and consume small amounts of electricity, such as residential customers, farms, etc.
- b) **Time of Use** – two rate tariff (¢/kWh) applicable to peak and off-peak periods with a standing charge. This tariff is applicable to ‘Residential’ customers that have an interval meter and ‘Small Business’⁴ customers that have either a two rate accumulation meter or an interval meter; and
- c) **Time of Use Demand** – two rate tariff (¢/kWh) applicable to peak and off-peak periods, a demand charge (\$/kW pa) and a fixed charge. This tariff is applicable to ‘Large Business’ customers and ‘Small Business’ customers that have a meter capable of measuring demand.

The tariff structures have been made simple to meet the capability of the meters installed at the customers’ premises and also to ensure they are comprehensible by customers so that they can react to tariff signals. While conflicts may arise between cost reflectivity and simplicity, JEN is of the view that customers react better to simple and stable tariff structures than to complicated tariff structures. As a result JEN has not changed its network tariff structures over the years.

2.2 Tariff Categories

JEN tariffs are grouped into the following three categories:

- a) **Residential** (Tariff Code starting with A1XX) – This category is designed to meet the needs of residential customers.
- b) **Small Business (SB)** (Tariff Code starting with A2XX) – This category refers to low voltage customers:
 - consuming an annual amount of electricity less than 400 MWh⁵;
 - having a maximum demand of less than 120 kW; and
 - where supply is not taken from an on-site or dedicated substation.

Unmetered supply is also included in this category. JEN offers five ‘Small Business’ tariffs, including two demand tariffs, to meet the needs of customers belonging to this category. Customers are encouraged to assess their usage and load pattern in order to determine the network tariff that best meets their needs; and

⁴ Section 1.2.2 describes the term “Small Business”

⁵ One MWh is equivalent to 1,000 kWh

c) **Large Business (LB)** – This category refers to:

- subtransmission customers (Tariff Code starting with A5XX);
- high voltage customers (Tariff Code starting with A4XX); and
- low voltage customers (Tariff Code starting with A3XX):
 - consuming an annual amount of electricity greater than or equal to 400 MWh; or
 - having a maximum demand greater than or equal to 120 kW; or
 - where supply is taken from an on-site or dedicated substation.

Within the high voltage and low voltage tariff categories customers are assigned to tariffs based on their load characteristics. For example, a high voltage customer consuming less than 50 GWh⁶ pa would be assigned to tariff A400. Similarly, a low voltage non-embedded network customer consuming an amount of electricity greater than 6 GWh pa would be assigned to tariff A370.

The published annual tariff schedule, as approved by the AER, clearly defines each category in terms of the customer's load and connection characteristics and where applicable the metering requirements. In addition, it describes the criterion applicable to each tariff. JEN consistently uses the tariff category and criterion in order to assign or re-assign customers to the appropriate tariff to provide equity between customers.

Customers are encouraged to assess their annual usage on a regular basis to determine whether they are entitled to change their tariff and take advantage of the different rates available.

The full details of tariff names, codes and rates are in Appendix 1, 2 and 3 of this report. These proposed tariffs were submitted to the AER on 4th November 2009 and were subsequently approved on 14 December 2009. The new prices will be effective from 1 January 2010.

2.3 Parent Tariff and Sub Categories

JEN uses a system of parent tariff categories with sub categories for some parent tariffs. A list of the parent tariff categories and sub categories is provided in Table 2-1.

Table 2-1 Parent tariff categories and Sub Categories

Tariff Category	Parent tariff	Sub category tariff
Residential	A100	- A10I
	A140	
	A180	
Small Business	A200	
	A210	
	A230	
	A250	

⁶ One GWh is equivalent to 1,000 MWh

Tariff Category	Parent tariff	Sub category tariff
Large Business	A270	
	A290	
	A300	- A30E
	A320	- A32E
	A340	- A34E - A34M
	A370	- A37E - A37M
	A400	- A40E - A40R - A42E
	A480	
	A500	- A50A - A50E

The tariff naming system uses an alpha numeric code for the parent tariff and related sub categories. The parent tariff codes begin with the letter A followed by three numerals for example A100, A180. The sub categories for each parent tariff replace the last numeral of the parent tariff with an alpha character defining the sub category.

2.4 Premium Feed in Tariff (PFIT)

With the pass of the Electricity Industry Amendment (Premium Solar Feed-in Tariff) Act 2009, JEN has replicated some of its network tariffs, using the prefix – the letter “F” to denote that these tariffs attract the Premium Feed-in Tariff rebate. The table below lists all available “F” tariffs. These tariffs have the same structure and prices as the corresponding matching tariffs (ie tariffs starting with the letter “A”).

Table 2-2 Premium Feed in Tariffs

Tariff Category	“F” Tariff	Matching Tariff
Residential	F10i	A10i
Small Business	F210	A210
	F230	A230
	F250	A250
	F270	A270
	F300	A300
Large Business		

A qualifying customer wishing to be reassigned to an “F” tariff must apply for a tariff reassignment through their retailer.

In addition to the PFIT rebate payment made to qualifying customers, the administration of the PFIT scheme will cause JEN to incur additional costs, namely system setup costs and administration costs. The AER has determined the PFIT rebate payments and the administration of the PFIT scheme costs to be treated as pass through costs. As a result these costs are included in the JEN approved 2010 network tariffs to be recovered from all customers. The value of the PFIT pass through applied to customers' network bill in 2010 is in the range 0.022 – 0.024 cents per kWh, depending on the tariff assigned to the customer and the electricity consumption time period. Refer to Appendix 4 for full details of the PFIT pass through rates applied to each tariff. Note these rates are already included in the Transmission Tariffs schedule shown in Appendix 3.

2.5 Expected Changes in Tariffs

Tariff Structure:

JEN has not changed the structure of its tariffs for 2010.

2.6 How Each Tariff Meets Upper & Lower Bounds

JEN is required under Clause 2.3.16(i) of the Price Determination to demonstrate that its distribution tariffs are economically efficient by illustrating that its distribution prices fall within a cost window bounded by the following lower and upper bounds:

- a) *Lower bound* – The AER defined the lower bound, with regards to a specific distribution tariff, as being the avoidable cost of serving distribution customers assigned to that distribution tariff; and
- b) *Upper bound* – The AER defined the upper bound, with regards to a specific distribution tariff, as being the cost of providing the service on a stand-alone basis to distribution customers assigned to that distribution tariff.

The table below summarises the results for 2010 and demonstrates that JEN's average distribution prices for 2010 fall within the avoidable and stand-alone costs and therefore are economically efficient.

Table 2-3 Economically efficient DUoS tariffs for 2010– Lower & Upper bounds

DUoS Tariff Code	Avoidable Cost (¢/kWh)	Average Price ⁷ (¢/kWh)	Stand alone Cost (¢/kWh)	Scale Index ⁸
A100 & A10I	1.802	9.220	5.952	55.9%
A140	0.728	9.220	4.566	45.2%
A180	0.434	9.220	1.123	7.8%
A200	2.186	7.342	6.585	85.3%
A210	0.994	7.342	5.118	65.0%
A230	0.939	7.342	4.220	51.2%
A250	1.090	7.342	5.543	71.2%

⁷ Average prices were calculated by applying 2010 DUoS tariffs to 2008 quantities.

⁸ The scale index indicates the relative position of the average charge with respect to the avoidable and stand-alone costs. A scale index value of 0% denotes that the average charge is equal to the avoidable cost. A scale index of 100% indicates that the average charge is equal to the stand-alone cost.

DUoS Tariff Code	Avoidable Cost (¢/kWh)	Average Price ⁷ (¢/kWh)	Stand alone Cost (¢/kWh)	Scale Index ⁸
A270	0.938	7.342	4.565	56.6%
A290	0.489	7.342	3.161	39.0%
A300 & A30E	1.650	5.694	4.139	61.6%
A320 & A32E	0.974	5.694	3.034	43.6%
A340 & A34E	0.763	5.694	2.471	34.6%
A34M	0.763	5.694	3.288	51.2%
A370 & A37E	0.595	5.694	2.036	28.3%
A37M	0.595	5.694	1.960	26.8%
A400, A40E & A42E	0.832	4.262	1.861	30.0%
A40R	0.832	4.262	1.135	8.8%
A480	0.584	4.262	1.198	16.7%
A500 & A50A	0.306	1.679	0.327	1.6%

2.7 Future Investment Requirements

When proposing distribution tariffs JEN is required to consider future investment costs that may be required to cater for impact of additional usage by customers in various tariff categories. This requirement is outlined in the AER's Final Determination Clause 2.3.16 (i) (c).

The analysis conducted by JEN's consultant (Cap Gemini/Ernst & Young) took future capital expenditure due to peak demand into account in calculating avoidable and standalone costs. The result of this analysis was a set of upper and lower bounds for each tariff category within which the average prices for each tariff category are required to fall. As demonstrated in section 2.6 the average price for all of JEN's proposed tariffs meet this criteria and are therefore considered to take into account future investment requirements.

2.8 Excluded Service Charges

JEN, under clauses 10.3 and 11.1 of the distribution licence must offer to provide excluded services for a charge and on terms and conditions that are fair and reasonable. The AER regulates the maximum charge for such services set by distributors. However, customers may negotiate an alternate charge for an alternate level of service and for some services; there may be alternative service providers.

Excluded services include items such as: connection, field officer visits, provision of service fuses, elective underground services, covering of low voltage mains, service cable pulled down by high loads, public lighting, meter provision, meter data services, meter investigation, provision of a switching service, load profile for current transformer meters, load profile print out and miscellaneous charges. A description of each of these services, the standard terms and conditions and prices is included in Appendix 5.

2.9 Re-assignments of Tariffs

JEN has not carried out tariff reassignments in 2009. Any tariff reassignments occurring during 2009 was as a result of customers' requests for tariff reassignment, which can be made by a customer at any time. All tariff reassignment requests must be made in writing using the appropriate form and must be sent to E-mail address jentariffs@jemena.com.au. Copy of the form can be downloaded from the following website:

<http://www.jemena.com.au/operations/distribution/JEN/>

2.10 Contract Demand Based Charges

Contract Demands⁹ are set for all customers assigned to or requesting to be assigned to a demand tariff. Once an initial contract demand is set the contract demand can permanently increase when the customer's Maximum Demand¹⁰ exceeds its existing Contract Demand. The increase in Maximum Demand may result from a number of situations such as an increase in production, a change in equipment operation or the effect of weather conditions on the customer's load.

Customers who are able to manage their Maximum Demand are eligible to apply in writing for a Contract Demand reduction (reset). All Contract Demand reset applications are assessed in accordance with JEN Policy for Resetting Contract Demand. The policy describes the requirements which customers and their representatives¹¹ must comply with when requesting a review in the customer's Contract Demand at a particular supply point, how JEN will respond to such requests, and generally how a customer's Contract Demand may vary from time to time. The policy outlines how JEN, customers and their representatives implement:

- a permanent increase in the Customer's Contract Demand;
- a temporary increase in the Customer's Contract Demand; and
- a permanent decrease in the Customer's Contract Demand.

The policy was communicated to all Retailers in June 2003. The Retailers were also advised to distribute the policy to their customers who are connected to JEN distribution network. The policy and a Contract Demand Reset application form is published on and can be downloaded from the following website:

<http://www.jemena.com.au/operations/distribution/JEN/>

During the 2008 calendar year, 11 customers had their contract demand reset.

⁹ Contract Demand means the kW (or kVA) demand used to calculate the demand charge component of the tariff in each billing period. Contract demand is always greater than or equal to the Maximum Demand.

¹⁰ In relation to a billing period, Maximum Demand is the demand calculated as being the highest energy consumption in kWh recorded over any 15-minute period multiplied by four.

¹¹ mean the Retailer, consultant, administrator, liquidator or third party contractor acting on the customer's behalf.

3 USAGE & QUANTITY INFORMATION

3.1 Usage and Customer Numbers

The number of customers served and quantity energy consumed by customers under each tariff code is provided in the table below. For tariffs with less than 10 customers these quantities have been aggregated into one line titled "Other". Actual quantities are provided for calendar year 2008, estimates for 2009 and forecasts for 2010.

Table 3-1 Usage and customer numbers by tariff code

	<i>Actual</i>		<i>Estimate</i>		<i>Forecast</i>	
	2008 calendar year		2009 calendar year		2010 calendar year	
	Customer Number	Energy GWh	Customer Number	Energy GWh	Customer Number	Energy GWh
A100	264,410	1,160	271,368	1,161	262,358	1,103
A10I	7	0	166	1	13,804	61
A140	2,010	16	2,077	17	2,006	16
A180	0	77	0	75	0	69
A200	14,133	146	14,146	135	13,930	127
A210	8,433	456	8,770	460	9,003	470
A230	227	60	248	59	252	59
A250	2,840	95	2,605	86	2,431	79
A270	115	31	119	31	123	32
A290	0	54	0	56	0	57
A300	563	277	598	261	595	257
A320	247	337	257	315	255	307
A340	89	289	82	272	82	267
A34M	19	27	19	26	19	25
A370	16	116	16	108	15	98
A37M	19	63	23	59	23	57
A400	70	584	70	549	69	524
Other	25	702	30	676	32	686

3.2 Future Network Constraints

JEN publishes an annual planning report which details how JEN plans to meet predicted demand for electricity supplied through its network over the following five calendar years. The report is available to the public via the JEN website¹² and complies with clause 3.5 of the Victorian Electricity Distribution Code. The planning report is based on the information and estimates available at the time the report is prepared and is subject to review annually.

The 2008 JEN Planning Report indicates that during five years 2009 -2013, the JEN network has adequate capacity to meet anticipated maximum demand, even under extreme summer conditions. There is, however, a risk of inadequate supply capacity in some parts of the network if there is simultaneous occurrence of extreme summer temperatures and unexpected outage of critical plant.

JEN has a risk management system in place, which assesses the risk of supply failures. Augmentations are planned for those parts of the network where the risks justify the costs of augmentation. The summary tables in the planning report give the magnitude and probability of loss of load for zone substation and sub-transmission line outage conditions. For those parts of the network where the risk is very low, contingency plans are in place to minimise adverse impacts on customers.

The planning report describes the preferred options of zone substation and line augmentation projects, which are required to increase the capacity of the network to meet the increasing customer demand and / or maintain adequate supply reliability. Table 3-2 shows major augmentation projects, planned for the next five years, to relieve the supply capacity constraints under plant or line outage conditions. Details regarding the consideration of options, selection of the preferred network solution and estimated costs for these projects is contained in the System Planning Report.

Table 3-2 Energy and hours at risk per annum for a transformer or subtransmission line outage, with preferred network solution

Zone substations & sub-transmission lines with supply capacity constraint	MWh at risk ¹³	Hours at risk ¹⁴	Expected Unserved MWh	Year	Preferred Network Solution
FE zone substation	Required to off-load YTS prior to its retirement			2009	Install 2 nd transformer (Project in progress)
FT & NS zone substations	Risk assessment pending additional information			2011 (tentative)	Install 3 rd transformer at ES zone substation
KTS-MAT-AW-PV-KTS loop	1642	171	0.7	2011 (tentative)	Re-conductor part KTS-AW line.

¹² <http://www.jemena.com.au/operations/distribution/JEN/>

¹³ Energy and hours at risk apply to the following year if augmentation does not take place.

¹⁴ The expected unserved MWh takes into account the probability of an outage occurring during the peak demand period.

ST zone substation	340	76	2.2	2012 (tentative)	Install 2 nd transformer at COO zone substation
TTS-CN-CS-TTS loop	3,365	658	1.76	2012 (tentative)	Re-conductor part TTS-CN & TTS-CS lines
BD zone substation and 22 kV network	92	20	0.8	2013 (tentative)	New zone substation (BMS)
SBY zone substation	150	68	0.6	2013 (tentative)	Install 2 nd transformer at SHM zone substation
AW zone substation	Risk assessment pending additional information			2013/4 (tentative)	New zone substation (TMA)
FT zone substation	Risk assessment pending additional information			2013/4 (tentative)	Install 3 rd transformer at FT zone substation

Note: Details of abbreviations for station names referred to in this table are provided in the Annual Planning Report.

Contributions in the form of annual network support payments are available from JEN to proponents of non-network alternatives if they defer or avoid augmentations of JEN's distribution systems. Accordingly proponents of non-network alternatives, such as embedded generation or demand management are invited to discuss their proposals with JEN.

4 ANNUAL ADJUSTMENT VARIABLES

4.1 Adjustment Variables

The adjustment variables used by JEN in the tariff setting process include the Consumer Price Index (CPI), the service incentive mechanism “S” factor, the licence fee “L” factor, the “X” factor¹⁵, the “Z” factor¹⁶ and the Y factor. The CPI, S, L and X factors are used in setting DUoS prices, whereas the CPI, the Z factor and the Y factor are used in setting Transmission prices. The values for these variables for the 2010 calendar year are shown in Table 4-1

Table 4-1 Adjustment Variables

Adjustment Variable	Value for 2010
CPI	1.26%
S factor	102.87%
L factor	99.89%
X factor	2.5%
Z factor	18.0%
Y factor	10.8%

Changes to transmission tariffs are limited to a re-balancing constraint of $(1 + \text{CPI}) * (1 + \text{Z}) * (1 + \text{Y})$. The Z factor is calculated as the average annual increase in transmission costs up to an 18 per cent cap; and the Y factor is equal to 2 per cent. Where a Distribution Business (DB) is unable to fully recover its transmission costs due to this tariff re-balancing constraint the DB can apply to the Australian Energy Regulator under clause 3.4.7 of the Electricity Distribution Price Review 2006-10 - Final Decision Volume 2 to increase the value of Y in excess of 2 per cent. JEN and other 3 DBs have applied to the AER to increase the value of Y applicable to their 2010 transmission tariffs. JEN has applied for a Y value of 10.8% and has reflected this increase in its 2010 tariff submission.

4.2 Impact of Application of Adjustment Variables

Tariff Prices:

The 2010 tariffs have changed in accordance with the requirements of the AER's Final Determination. A summary of the percentage change in the DUoS and Transmission tariffs for each tariff category is provided in Table 4-2.

¹⁵ The X factor is an adjustment mechanism that aligns a distributor's current average tariff level with the average tariff level established by the AER

¹⁶ The Z factor is an adjustment mechanism to allow the distributor to recover the annual increases in its 'Pass Through Costs' up to a limit of 18%

Table 4-2 Percentage Change in DUoS and Transmission Tariffs


Tariff	DUoS tariffs	Transmission tariffs
A100	1.45%	32.28%
A10I	1.33%	23.15%
A140	1.58%	32.27%
A180	3.41%	32.09%
A200	0.62%	32.20%
A210	1.66%	32.15%
A230	2.31%	32.17%
A250	1.78%	32.18%
A270	2.30%	32.18%
A290	1.58%	32.21%
A300	1.38%	32.20%
A30E	1.46%	32.20%
A320	1.36%	32.21%
A32E	1.40%	32.21%
A340	1.42%	32.21%
A34E	1.41%	32.23%
A34M	1.34%	32.24%
A370	1.35%	32.27%
A37E	1.38%	32.29%
A37M	1.38%	32.22%
A400	1.34%	30.60%
A40E	1.35%	32.26%
A40R	1.73%	32.27%
A42E	1.27%	32.24%
A480	1.25%	32.21%
A500	1.00%	32.23%
A50A	1.02%	32.18%
A50E	1.66%	32.15%

Transmission costs make a large component of the network tariff charge applicable to large business customers. Given the large increases in the transmission tariffs, large business customers are expected to experience larger increases in their network tariff charge in comparison to small business and residential customers. Refer to the section below.

Price Comparisons:

The sections below provide a brief description of individual tariffs and assess the impact of 2010 network tariffs on customers¹⁷ by using five usage levels per network tariff namely *very low*, *low*, *average*, *high* and *very high*. The *average* consumption is calculated by dividing forecast energy by the number of customers. Once the average consumption is calculated the other four usage levels can be derived by applying a percentage to the *average* usage as shown below.

Figure 4-1 Usage Levels as a Percentage of Average Consumption



To assess the impact of demand based tariffs on customers it is necessary to assume a load factor to estimate the customer's chargeable demand. The demand charge is then applied to the higher of the estimated value or the tariff's minimum chargeable demand.

¹⁷ Where the number of customers assigned to a given tariff is less than 6 customers no comparison has been provided for that tariff.

4.2.1 Residential – General Purpose (A100)


This is a single rate tariff applicable to residential customers.

A comparison of the 2009 and 2010 'Residential – General Purpose' network tariff charges for the five usage levels is shown below.


	Very Low 1,324 kWh	Low 3,090 kWh	Average 4,414 kWh	High 5,738 kWh	Very high 7,503 kWh
2009	\$96	\$199	\$277	\$354	\$457
2010	\$101	\$210	\$291	\$372	\$481
Change	5.0%	5.1%	5.1%	5.1%	5.1%

The increase in the network tariff charge varies from 5.0% to 5.1% depending on usage level, with smaller users experiencing a smaller percentage increase than large users.

The charts below compare 2009 and 2010 network tariff charges for low, average and high users and show 2010 DUoS and Transmission charges as a proportion of the network charge for an average user.

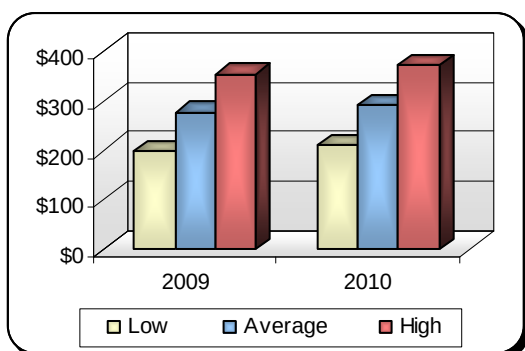

**Network Tariff charge comparison
2009 vs 2010.**

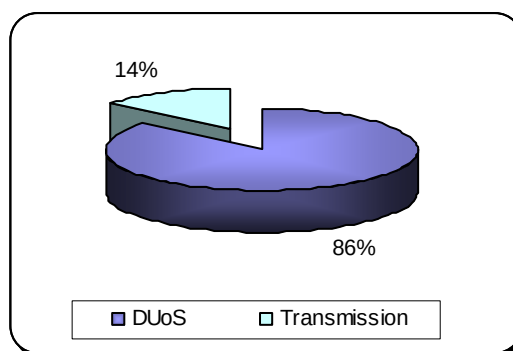

**2010 DUoS and Transmission charges
as a proportion of the network charge
for an average user.**

4.2.2 Residential – Time of Use Interval Meter (A10i)

This tariff is available to customers with an interval meter. The peak rate applies to the period 7.00 AM to 11.00 PM Monday to Friday and the off-peak rate applies to all other times.


A comparison of the 2009 and 2010 'Residential – Time of Use Interval Meter' network tariff charges for the five usage levels is shown below.

Peak to Total Energy Ratio: 30%					
	Very Low 1,317 kWh	Low 3,073 kWh	Average 4,390 kWh	High 5,707 kWh	Very high 7,463 kWh
2009	\$74	\$147	\$202	\$257	\$331
2010	\$78	\$156	\$214	\$272	\$350
Change	5.5%	5.7%	5.8%	5.8%	5.8%


Peak to Total Energy Ratio: 50%					
	Very Low 1,317 kWh	Low 3,073 kWh	Average 4,390 kWh	High 5,707 kWh	Very high 7,463 kWh
2009	\$95	\$196	\$272	\$348	\$449
2010	\$100	\$206	\$286	\$366	\$473
Change	5.1%	5.2%	5.2%	5.2%	5.2%

The above tables indicate that the increase in the network tariff charge varies from 5.1% to 5.8% depending on customers' consumption and load patterns.

The charts below compare 2009 and 2010 network tariff charges for low, average and high users and show 2010 DUoS and Transmission charges as a proportion of the network charge for an average user. For both charts the peak to total energy ratio is 30%.

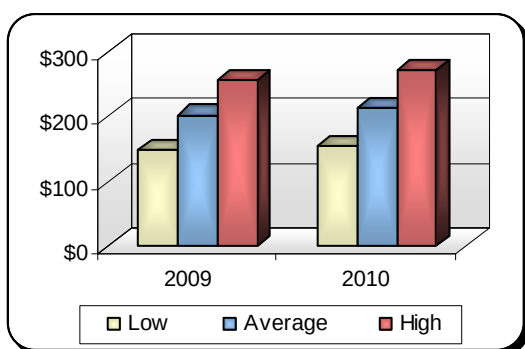

**Network Tariff charge comparison
2009 vs 2010.**

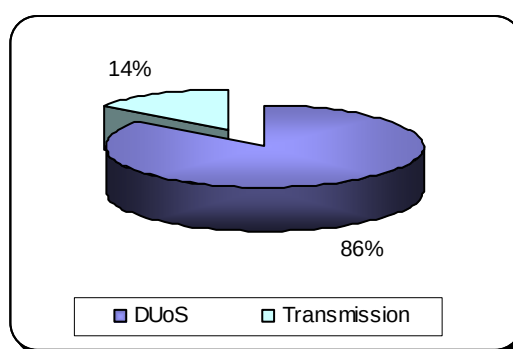

**2010 DUoS and Transmission charges
as a proportion of the network charge
for an average user.**

4.2.3 Residential – Time of Use (A140)

This tariff has been closed to new entrants effective from 1 January 2007. The peak rate applies to the period 7.00 AM to 11.00 PM Monday to Friday and the off-peak rate applies to all other times.


A comparison of the 2009 and 2010 'Residential – Time of Use' network tariff charges for the five usage levels is shown below.

Peak to Total Energy Ratio: 30%					
	Very Low 2,330 kWh	Low 5,436 kWh	Average 7,766 kWh	High 10,096 kWh	Very high 13,202 kWh
2009	\$113	\$220	\$300	\$380	\$487
2010	\$122	\$238	\$325	\$413	\$529
Change	7.8%	8.4%	8.5%	8.6%	8.7%


Peak to Total Energy Ratio: 50%					
	Very Low 2,330 kWh	Low 5,436 kWh	Average 7,766 kWh	High 10,096 kWh	Very high 13,202 kWh
2009	\$141	\$286	\$394	\$503	\$647
2010	\$151	\$306	\$423	\$539	\$694
Change	6.9%	7.2%	7.2%	7.3%	7.3%

The above tables indicate that the increase in the network tariff charge varies from 6.9% to 8.7% depending on customers' consumption and load patterns.

The charts below compare 2009 and 2010 network tariff charges for low, average and high users and show 2010 DUoS and Transmission charges as a proportion of the network charge for an average user. For both charts the peak to total energy ratio is 30%.

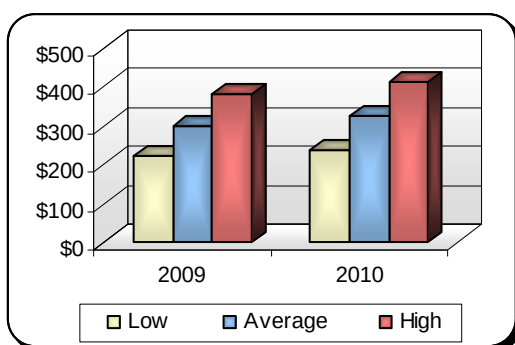

Network Tariff charge comparison
2009 vs 2010.

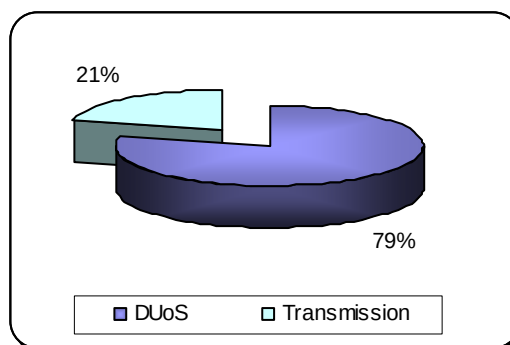

2010 DUoS and Transmission charges
as a proportion of the network charge
for an average user.

4.2.4 Residential – Off Peak Heating Only (A180)


This is a complementary tariff to the ‘Residential – General Purpose’ (A100) network tariff only. It relates to controlled loads such as storage water heating.

This tariff is not available to new or existing customers that install embedded generation. The installation of an embedded generation by an existing customer is considered a change in load characteristic and as such the A180 tariff is not supported. The metering and data recording for a co-generation site has additional regulated requirements to that of a standard site. It is not technically feasible to meet these requirements and at the same time be able to separately measure, control and bill a load controlled heating.


A comparison of the 2009 and 2010 ‘Residential – Off Peak Heating Only’ network tariff charges for the five usage levels is shown below.

	Very Low 1,204 kWh	Low 2,810 kWh	Average 4,014 kWh	High 5,219 kWh	Very high 6,824 kWh
2009	\$18	\$41	\$59	\$76	\$100
2010	\$20	\$46	\$66	\$86	\$112
Change	12.4%	12.4%	12.4%	12.4%	12.4%

The charts below compare 2009 and 2010 network tariff charges for low, average and high users and show 2010 DUoS and Transmission charges as a proportion of the network charge for an average user.

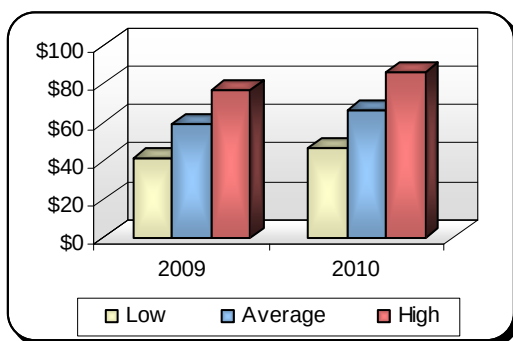

**Network Tariff charge comparison
2009 vs 2010.**

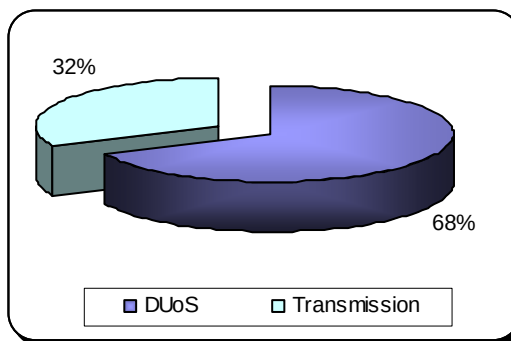

**2010 DUoS and Transmission charges
as a proportion of the network charge
for an average user.**

4.2.5 Small Business – General Purpose (A200)


This is a single rate tariff applicable to 'Small Business' customers. This single rate tariff is only available to customers with a single rate accumulation meter.

A comparison of the 2009 and 2010 'Small Business – General Purpose' network tariff charges for the five usage levels is shown below.


	Very Low 2,727 kWh	Low 6,364 kWh	Average 9,091 kWh	High 11,819 kWh	Very high 15,455 kWh
2009	\$239	\$494	\$685	\$876	\$1,131
2010	\$251	\$518	\$718	\$919	\$1,186
Change	4.7%	4.8%	4.9%	4.9%	4.9%

The increase in network tariff charge varies between 4.7% and 4.9% depending on the consumption.

The charts below compare 2009 and 2010 network tariff charges for low, average and high users and show 2010 DUoS and Transmission charges as a proportion of the network charge for an average user.

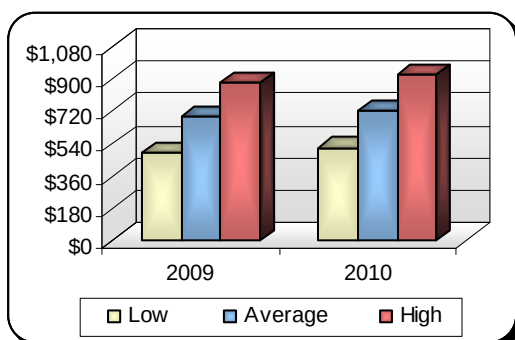

**Network Tariff charge comparison
2009 vs 2010.**

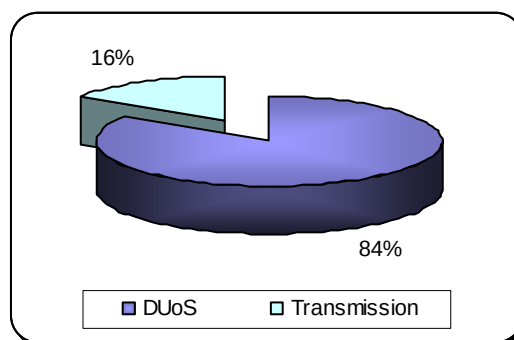

**2010 DUoS and Transmission charges
as a proportion of the network charge
for an average user.**

4.2.6 Small Business – Time of Use Weekdays (A210)

This is a two-rate tariff applicable to 'Small Business' customers. This tariff is only available to customers who have a two-rate accumulation meter or consume less than 160MWh per annum and have a maximum demand of less than 60 kW. The peak rate applies to the period 7.00 AM to 11.00 PM Monday to Friday and the off-peak rate applies to all other times.


A comparison of the 2009 and 2010 'Small Business –Time of Use Weekdays' network tariff charges for the five usage levels is shown below.

Peak to Total Energy Ratio: 40%					
	Very Low 15,656 kWh	Low 36,531 kWh	Average 52,187 kWh	High 67,843 kWh	Very high 88,717 kWh
2009	\$769	\$1,680	\$2,364	\$3,047	\$3,958
2010	\$829	\$1,813	\$2,552	\$3,290	\$4,275
Change	7.8%	7.9%	8.0%	8.0%	8.0%


Peak to Total Energy Ratio: 70%					
	Very Low 15,656 kWh	Low 36,531 kWh	Average 52,187 kWh	High 67,843 kWh	Very high 88,717 kWh
2009	\$1,083	\$2,414	\$3,412	\$4,410	\$5,741
2010	\$1,154	\$2,573	\$3,636	\$4,700	\$6,119
Change	6.5%	6.6%	6.6%	6.6%	6.6%

The increase in charges varies from 6.5% to 8.0% depending on consumption and load patterns with smaller users experiencing a lesser increase than larger users.

The charts below compare 2009 and 2010 network tariff charges for low, average and high users and show 2010 DUoS and Transmission charges as a proportion of the network charge for an average user. For both charts the peak to total energy ratio is 70%.

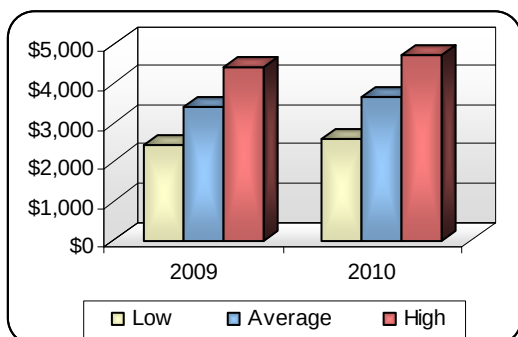

**Network Tariff charge comparison
2009 vs 2010.**

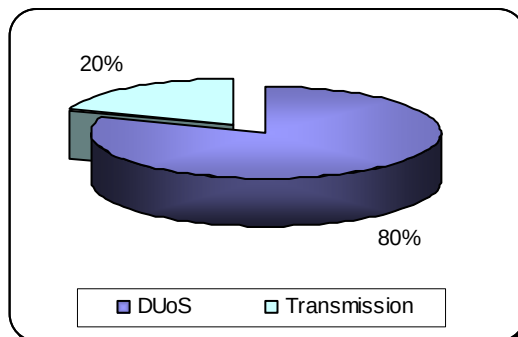

**2010 DUoS and Transmission charges
as a proportion of the network charge
for an average user.**

4.2.7 Small Business – Time of Use Weekdays Demand (A230)


This time of use demand based network tariff attracts a minimum chargeable demand of 60 kW and requires the installation of a meter capable of measuring demand. The peak rate applies to the period 7.00 AM to 11.00 PM Monday to Friday and the off-peak rate applies to all other times.

A comparison of the 2009 and 2010 'Small Business – Time of Use Weekdays Demand' network tariff charges for the five usage levels is shown below.


Peak to Total Energy Ratio: 40% Load factor 55%					
	Very Low 70,037 kWh	Low 163,419 kWh	Average 233,456 kWh	High 303,493 kWh	Very high 396,876 kWh
2009	\$4,914	\$7,649	\$9,701	\$11,883	\$15,466
2010	\$5,274	\$8,305	\$10,578	\$12,988	\$16,906
Change	7.3%	8.6%	9.0%	9.3%	9.3%

Peak to Total Energy Ratio: 70% Load factor 55%					
	Very Low 70,037 kWh	Low 163,419 kWh	Average 233,456 kWh	High 303,493 kWh	Very high 396,876 kWh
2009	\$5,564	\$9,167	\$11,869	\$14,702	\$19,152
2010	\$5,977	\$9,944	\$12,919	\$16,031	\$20,887
Change	7.4%	8.5%	8.8%	9.0%	9.1%

The charts below compare 2009 and 2010 network tariff charges for low, average and high users and show 2010 DUoS and Transmission charges as a proportion of the network charge for an average user. For both charts the peak to total energy ratio is 70% and the load factor is 55%.

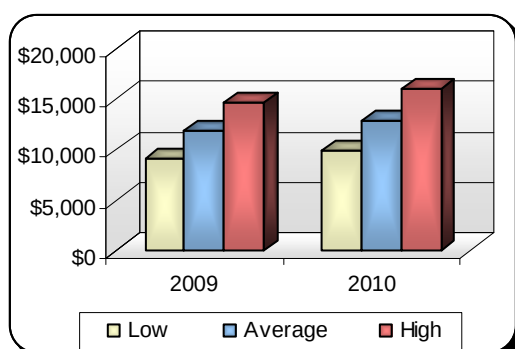

Network Tariff charge comparison
2009 vs 2010.

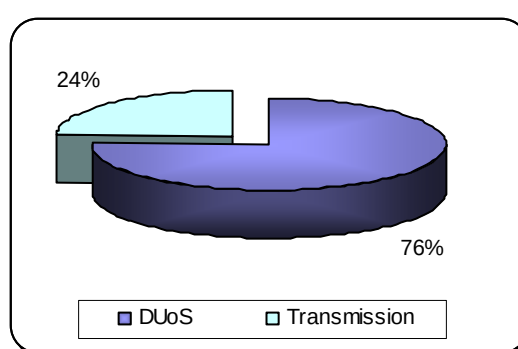

2010 DUoS and Transmission charges
as a proportion of the network charge
for an average user.

4.2.8 Small Business – Time of Use Extended (A250)

This is a two-rate tariff applicable to ‘Small Business’ customers. This tariff will only be available to customers who have a two-rate accumulation meter or consume less than 160MWh per annum and have a maximum demand of less than 60 kW. Unlike the previous two tariffs, the peak rate applies to the period 7.00 AM to 11.00 PM all days and the off-peak rate applies to all other times.


A comparison of the 2009 and 2010 ‘Small Business –Time of Use Extended’ network tariff charges for the five usage levels is shown below.

Peak to Total Energy Ratio: 60%					
	Very Low 9,790 kWh	Low 22,844 kWh	Average 32,634 kWh	High 42,425 kWh	Very high 55,478 kWh
2009	\$588	\$1,259	\$1,763	\$2,266	\$2,937
2010	\$631	\$1,352	\$1,893	\$2,433	\$3,154
Change	7.2%	7.3%	7.4%	7.4%	7.4%


Peak to Total Energy Ratio: 80%					
	Very Low 9,790 kWh	Low 22,844 kWh	Average 32,634 kWh	High 42,425 kWh	Very high 55,478 kWh
2009	\$698	\$1,514	\$2,126	\$2,739	\$3,555
2010	\$744	\$1,616	\$2,269	\$2,923	\$3,795
Change	6.6%	6.7%	6.7%	6.7%	6.7%

The increase in charges varies from 6.6% to 7.4% depending on consumption and load patterns with smaller users experiencing a lesser increase than larger users.

The charts below compare 2009 and 2010 network tariff charges for low, average and high users and show 2010 DUoS and Transmission charges as a proportion of the network charge for an average user. For both charts the peak to total energy ratio is 80%.

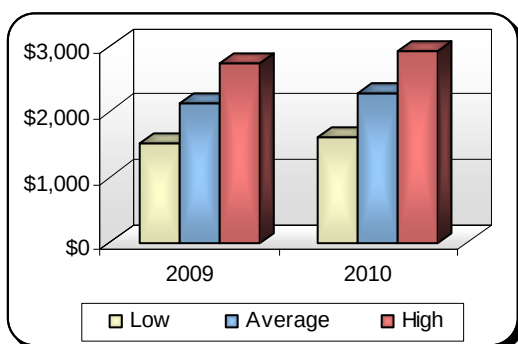

Network Tariff charge comparison
2009 vs 2010.

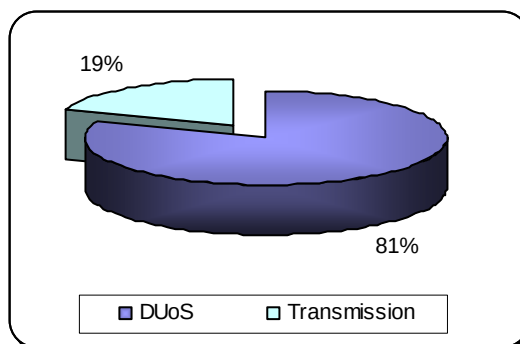

2010 DUoS and Transmission charges
as a proportion of the network charge
for an average user.

4.2.9 Small Business – Time of Use Extended Demand (A270)


This time of use demand based network tariff attracts a minimum chargeable demand of 60 kW and requires the installation of a meter capable of measuring demand. The peak rate applies to the period 7.00 AM to 11.00 PM all days and the off-peak rate applies to all other times.

A comparison of the 2009 and 2010 'Small business –Time of Use Extended Demand' network tariff charges for the five usage levels is shown below.


	Peak to Total Energy Ratio: 60% Load factor 55%				
	Very Low 78,226 kWh	Low 182,527 kWh	Average 260,752 kWh	High 338,978 kWh	Very high 443,279 kWh
2009	\$5,268	\$8,476	\$10,882	\$13,741	N/A
2010	\$5,656	\$9,196	\$11,850	\$14,980	N/A
Change	7.4%	8.5%	8.9%	9.0%	N/A

	Peak to Total Energy Ratio: 80% Load factor 55%				
	Very Low 78,226 kWh	Low 182,527 kWh	Average 260,752 kWh	High 338,978 kWh	Very high 443,279 kWh
2009	\$5,596	\$9,242	\$11,976	\$15,163	N/A
2010	\$6,015	\$10,032	\$13,045	\$16,533	N/A
Change	7.5%	8.5%	8.9%	9.0%	N/A

The charts below compare 2009 and 2010 network tariff charges for low, average and high users and show 2010 DUoS and Transmission charges as a proportion of the network charge for an average user. For both charts the peak to total energy ratio is 80% and the load factor is 55%.

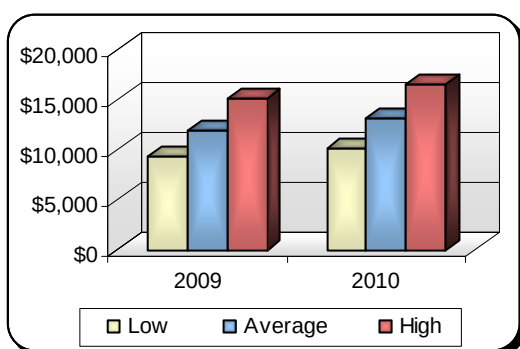

Network Tariff charge comparison
2009 vs 2010.

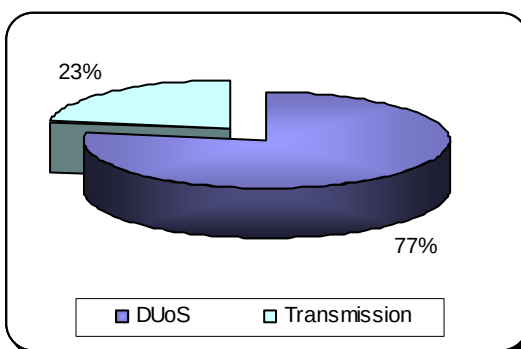

2010 DUoS and Transmission charges
as a proportion of the network charge
for an average user.

4.2.10 Large Business – LV 0.4 - 0.8 GWh (A300)


This is a time of use demand based network tariff applicable to LV commercial/industrial customers with annual consumption greater than or equal to 0.4 GWh but less than or equal to 0.8 GWh. It is also applicable to customers with an annual consumption less than 0.4 GWh but either having a maximum demand greater than or equal to 120 kW (150 kVA) or taking supply from an on-site or dedicated substation. The minimum chargeable demand is 120 kW. The peak rate applies to the period 7.00 AM to 11.00 PM Monday to Friday and the off-peak rate applies to all other times.

A comparison of the 2009 and 2010 'Large Business – LV 0.4 – 0.8 GWh' network tariff charges for the five usage levels is shown below.


Peak to Total Energy Ratio: 50% Load factor 55%					
	Very Low 129 MWh	Low 302 MWh	Average 431 MWh	High 561 MWh	Very high 734 MWh
2009	N/A	N/A	\$17,787	\$20,033	\$25,386
2010	N/A	N/A	\$19,514	\$22,190	\$28,179
Change	N/A	N/A	9.7%	10.8%	11.0%

Peak to Total Energy Ratio: 70% Load factor 55%					
	Very Low 129 MWh	Low 302 MWh	Average 431 MWh	High 561 MWh	Very high 734 MWh
2009	N/A	N/A	\$19,182	\$21,846	\$27,756
2010	N/A	N/A	\$21,168	\$24,340	\$30,991
Change	N/A	N/A	10.4%	11.4%	11.7%

The charts below compare 2009 and 2010 network tariff charges for low, average and high users and show 2010 DUoS and Transmission charges as a proportion of the network charge for an average user. For both charts the peak to total energy ratio is 70% and the load factor is 55%.

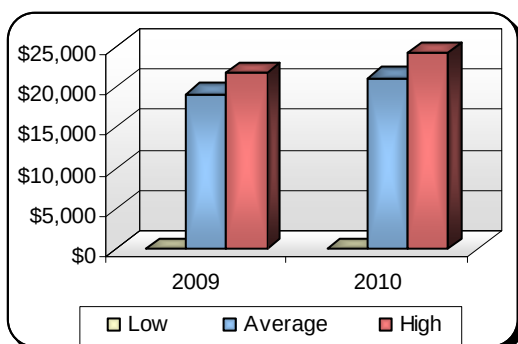

Network Tariff charge comparison
2009 vs 2010.

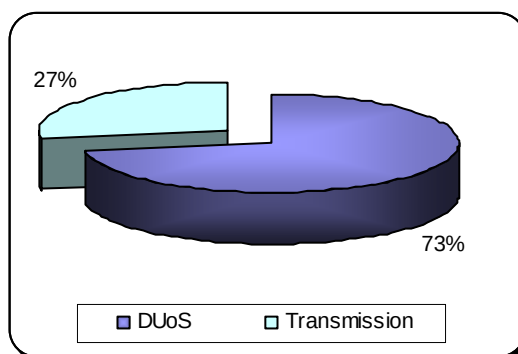

2010 DUoS and Transmission charges
as a proportion of the network charge
for an average user.

4.2.11 Large Business – LV_{EN} Annual Consumption ≤ 0.8 GWh (A30E)


This time of use demand based network tariff is applicable to embedded network customers with annual consumption ≤ 0.8 GWh. The peak rate applies to the period 7.00 AM to 11.00 PM Monday to Friday and the off-peak rate applies to all other times.

A comparison of the 2009 and 2010 'Large Business – LV LV_{EN} Annual Consumption ≤ 0.8 GWh' network tariff charges for the five usage levels is shown below.


Peak to Total Energy Ratio: 50% Load factor 55%					
	Very Low 079 MWh	Low 185 MWh	Average 264 MWh	High 344 MWh	Very high 449 MWh
2009	\$12,102	\$13,896	\$15,242	\$16,587	\$18,382
2010	\$12,662	\$14,805	\$16,412	\$18,019	\$20,161
Change	4.6%	6.5%	7.7%	8.6%	9.7%

Peak to Total Energy Ratio: 70% Load factor 55%					
	Very Low 079 MWh	Low 185 MWh	Average 264 MWh	High 344 MWh	Very high 449 MWh
2009	\$12,346	\$14,466	\$16,056	\$17,646	\$19,766
2010	\$12,953	\$15,484	\$17,382	\$19,280	\$21,810
Change	4.9%	7.0%	8.3%	9.3%	10.3%

The charts below compare 2009 and 2010 network tariff charges for low, average and high users and show 2010 DUoS and Transmission charges as a proportion of the network charge for an average user. For both charts the peak to total energy ratio is 70% and the load factor is 55%.

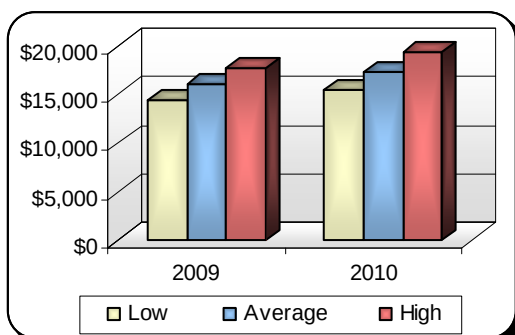

Network Tariff charge comparison
2009 vs 2010.

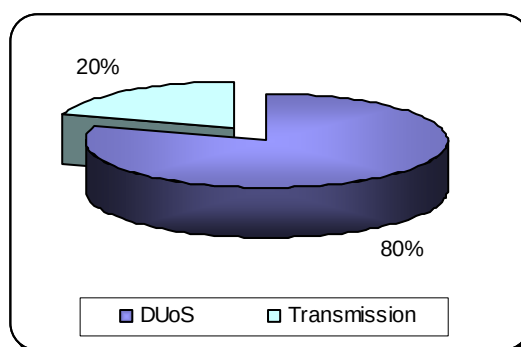

2010 DUoS and Transmission charges
as a proportion of the network charge
for an average user.

4.2.12 Large Business – LV 0.8⁺ - 2.2 GWh (A320)


This time of use demand based network tariff is applicable to LV commercial/industrial customers with annual consumption greater than 0.8 GWh but less than or equal to 2.2 GWh. The minimum chargeable demand is 250 kW. The peak rate applies to the period 7.00 AM to 11.00 PM Monday to Friday and the off-peak rate applies to all other times.

A comparison of the 2009 and 2010 'Large Business – LV 0.8⁺ – 2.2 GWh' network tariff charges for the five usage levels is shown below.


Peak to Total Energy Ratio: 50% Load factor 55%					
	Very Low 361 MWh	Low 842 MWh	Average 1,202 MWh	High 1,563 MWh	Very high 2,044 MWh
2009	N/A	\$32,478	\$37,945	\$48,426	\$62,440
2010	N/A	\$35,905	\$42,573	\$54,402	\$70,214
Change	N/A	10.6%	12.2%	12.3%	12.5%

Peak to Total Energy Ratio: 70% Load factor 55%					
	Very Low 361 MWh	Low 842 MWh	Average 1,202 MWh	High 1,563 MWh	Very high 2,044 MWh
2009	N/A	\$34,520	\$40,862	\$52,218	\$67,399
2010	N/A	\$38,479	\$46,250	\$59,182	\$76,465
Change	N/A	11.5%	13.2%	13.3%	13.5%

The charts below compare 2009 and 2010 network tariff charges for low, average and high users and show 2010 DUoS and Transmission charges as a proportion of the network charge for an average user. For both charts the peak to total energy ratio is 70% and the load factor is 55%.

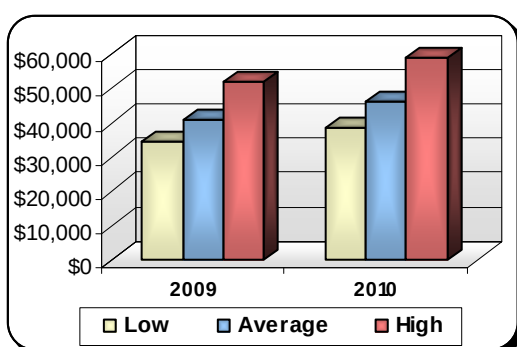

Network Tariff charge comparison
2009 vs 2010.

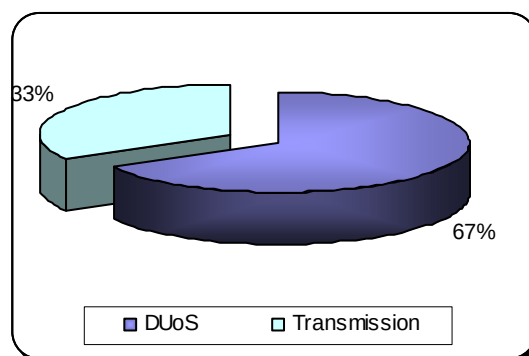

2010 DUoS and Transmission charges
as a proportion of the network charge
for an average user.

4.2.13 Large Business – LV_{EN} 0.8⁺ - 2.2 GWh (A32E)


This time of use demand based network tariff is applicable to LV embedded network commercial/industrial customers with annual consumption greater than 0.8 GWh but less than or equal to 2.2 GWh. The minimum chargeable demand is 250 kW. The peak rate applies to the period 7.00 AM to 11.00 PM Monday to Friday and the off-peak rate applies to all other times.

A comparison of the 2009 and 2010 'Large Business – LV_{EN} 0.8⁺ – 2.2 GWh' network tariff charges for the five usage levels is shown below.


Peak to Total Energy Ratio: 50% Load factor 55%					
	Very Low 240 MWh	Low 560 MWh	Average 800 MWh	High 1,040 MWh	Very high 1,360 MWh
2009	N/A	N/A	\$31,597	\$35,040	\$41,856
2010	N/A	N/A	\$34,783	\$38,993	\$46,895
Change	N/A	N/A	10.1%	11.3%	12.0%

Peak to Total Energy Ratio: 70% Load factor 55%					
	Very Low 240 MWh	Low 560 MWh	Average 800 MWh	High 1,040 MWh	Very high 1,360 MWh
2009	N/A	N/A	\$33,279	\$37,226	\$44,715
2010	N/A	N/A	\$36,927	\$41,780	\$50,540
Change	N/A	N/A	11.0%	12.2%	13.0%

The charts below compare 2009 and 2010 network tariff charges for low, average and high users and show 2010 DUoS and Transmission charges as a proportion of the network charge for an average user. For both charts the peak to total energy ratio is 70% and the load factor is 55%.

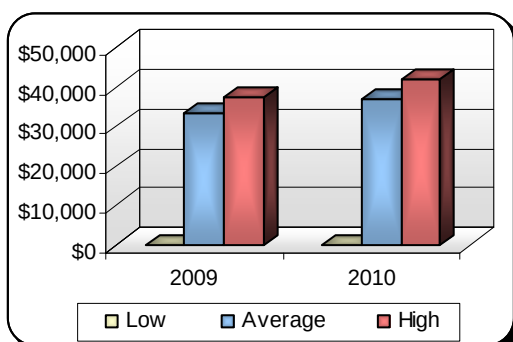

Network Tariff charge comparison
2009 vs 2010.

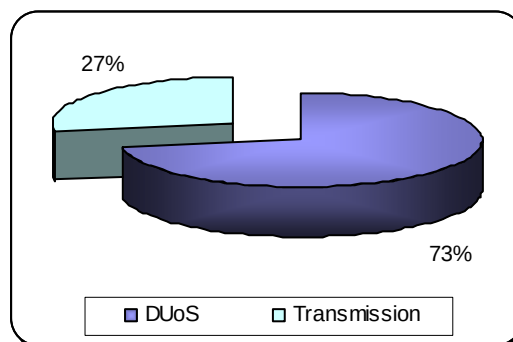

2010 DUoS and Transmission charges
as a proportion of the network charge
for an average user.

4.2.14 Large Business – LV 2.2⁺ - 6.0 GWh (A340)


This time of use demand based network tariff is applicable to large LV commercial/industrial customers with annual consumption greater than 2.2 GWh but less than or equal to 6.0 GWh. The minimum chargeable demand is 250 kW. The peak rate applies to the period 7.00 AM to 11.00 PM Monday to Friday and the off-peak rate applies to all other times.

A comparison of the 2009 and 2010 'Large Business – LV 2.2⁺ – 6.0 GWh' network tariff charges for the five usage levels is shown below.


Peak to Total Energy Ratio: 50% Load factor 55%					
	Very Low 977 MWh	Low 2,279 MWh	Average 3,256 MWh	High 4,232 MWh	Very high 5,534 MWh
2009	N/A	\$69,733	\$97,509	\$125,286	\$162,322
2010	N/A	\$78,799	\$110,363	\$141,928	\$184,014
Change	N/A	13.0%	13.2%	13.3%	13.4%

Peak to Total Energy Ratio: 70% Load factor 55%					
	Very Low 977 MWh	Low 2,279 MWh	Average 3,256 MWh	High 4,232 MWh	Very high 5,534 MWh
2009	N/A	\$75,753	\$106,111	\$136,468	\$176,944
2010	N/A	\$86,269	\$121,035	\$155,801	\$202,156
Change	N/A	13.9%	14.1%	14.2%	14.2%

The charts below compare 2009 and 2010 network tariff charges for low, average and high users and show 2010 DUoS and Transmission charges as a proportion of the network charge for an average user. For both charts the peak to total energy ratio is 50% and the load factor is 55%.

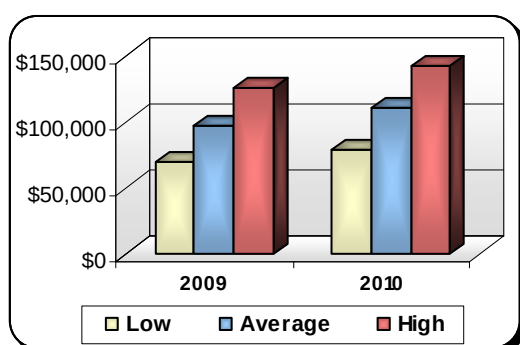

Network Tariff charge comparison
2009 vs 2010.

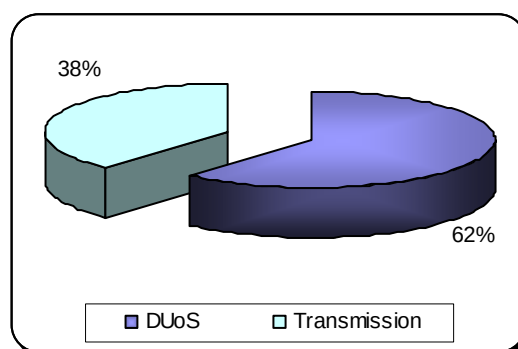

2010 DUoS and Transmission charges
as a proportion of the network charge
for an average user.

4.2.15 Large Business – LV_{MS} 2.2⁺ - 6.0 GWh (A34M)

This is a time of use demand based network tariff available to LV commercial/industrial customers, other than embedded network customers, taking supply from multiple supply points on a single site and the aggregated annual consumption from those supply points is greater than 2.2 GWh but less than or equal to 6.0 GWh. The aggregated minimum chargeable demand is 250 kW. The peak rate applies to the period 7.00 AM to 11.00 PM Monday to Friday and the off-peak rate applies to all other times.

The terms and conditions for assignment to Multiple Supply ("MS") tariffs can be found at the following Website link:


<http://www.jemena.com.au/operations/distribution/JEN/>

A comparison of the 2009 and 2010 'Large Business – LVMS 2.2+ – 6.0 GWh' network tariff charges for the five usage levels is shown below.


Peak to Total Energy Ratio: 50% Load factor 55%					
	Very Low 810 MWh	Low 1,890 MWh	Average 2,700 MWh	High 3,510 MWh	Very high 4,590 MWh
2009	N/A	N/A	\$70,016	\$89,979	\$116,596
2010	N/A	N/A	\$80,986	\$104,185	\$135,118
Change	N/A	N/A	15.7%	15.8%	15.9%

Peak to Total Energy Ratio: 70% Load factor 55%					
	Very Low 810 MWh	Low 1,890 MWh	Average 2,700 MWh	High 3,510 MWh	Very high 4,590 MWh
2008	N/A	N/A	\$77,290	\$99,435	\$128,961
2010	N/A	N/A	\$90,166	\$116,119	\$150,724
Change	N/A	N/A	16.7%	16.8%	16.9%

The charts below compare 2009 and 2010 network tariff charges for low, average and high users and show 2010 DUoS and Transmission charges as a proportion of the network charge for an average user. For both charts the peak to total energy ratio is 50% and the load factor is 55%.

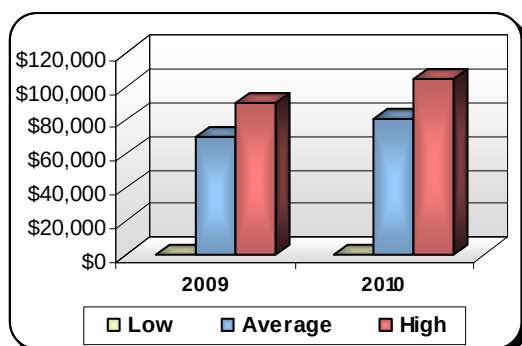

Network Tariff charge comparison
2009 vs 2010.

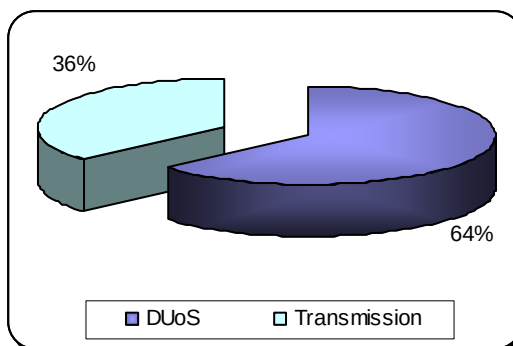

2010 DUoS and Transmission charges
as a proportion of the network charge
for an average user.

4.2.16 Large Business – LV 6.0⁺ GWh (A370)


This time of use demand based network tariff is available to very large LV commercial or industrial customers that consume an annual amount of electricity in excess of 6.0 GWh. The minimum chargeable demand is 450 kW. The peak rate applies to the period 7.00 AM to 11.00 PM Monday to Friday and the off-peak rate applies to all other times.

A comparison of the 2009 and 2010 'Large Business – LV 6.0⁺ GWh' network tariff charges for the five usage levels is shown below.


Peak to Total Energy Ratio: 50% Load factor 55%					
	Very Low 1,970 MWh	Low 4,596 MWh	Average 6,565 MWh	High 8,535 MWh	Very high 11,161 MWh
2009	N/A	N/A	\$181,727	\$233,995	\$303,686
2010	N/A	N/A	\$205,130	\$264,318	\$343,236
Change	N/A	N/A	12.9%	13.0%	13.0%

Peak to Total Energy Ratio: 70% Load factor 55%					
	Very Low 1,970 MWh	Low 4,596 MWh	Average 6,565 MWh	High 8,535 MWh	Very high 11,161 MWh
2009	N/A	N/A	\$196,775	\$253,557	\$329,267
2010	N/A	N/A	\$223,500	\$288,199	\$374,464
Change	N/A	N/A	13.6%	13.7%	13.7%

The charts below compare 2009 and 2010 network tariff charges for low, average and high users and show 2010 DUoS and Transmission charges as a proportion of the network charge for an average user. For both charts the peak to total energy ratio is 50% and the load factor is 55%.

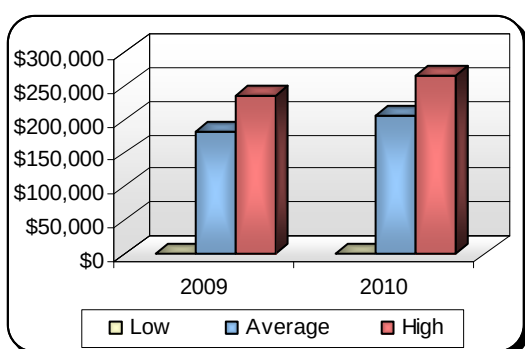

Network Tariff charge comparison
2009 vs 2010.

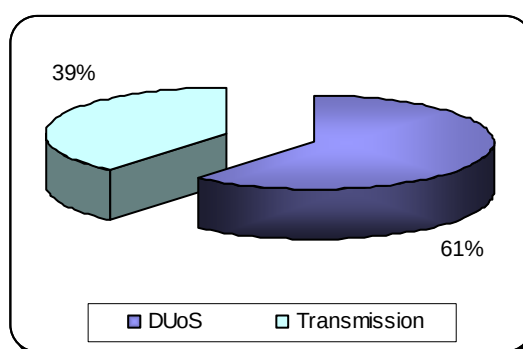

2010 DUoS and Transmission charges
as a proportion of the network charge
for an average user.

4.2.17 Large Business – LV_{MS} 6.0⁺ GWh (A37M)

This is a time of use demand based network tariff available to LV commercial/industrial customers, other than embedded network customers, taking supply from multiple supply points on a single site and the aggregated annual consumption from those supply points is greater than 6.0 GWh. The aggregated minimum chargeable demand is 450 kW. The peak rate applies to the period 7.00 AM to 11.00 PM Monday to Friday and the off-peak rate applies to all other times.

The terms and conditions for assignment to Multiple Supply ("MS") tariffs can be found at the following Website link:


<http://www.jemena.com.au/operations/distribution/JEN/>

A comparison of the 2009 and 2010 'Large Business – LV_{MS} 6.0⁺ GWh' network tariff charges for the five usage levels is shown below.


Peak to Total Energy Ratio: 50% Load factor 55%					
	Very Low 3,050 MWh	Low 7,116 MWh	Average 10,166 MWh	High 13,216 MWh	Very high 17,282 MWh
2009	N/A	\$168,076	\$237,701	\$307,327	\$400,161
2010	N/A	\$194,566	\$275,426	\$356,286	\$464,100
Change	N/A	15.8%	15.9%	15.9%	16.0%

Peak to Total Energy Ratio: 70% Load factor 55%					
	Very Low 3,050 MWh	Low 7,116 MWh	Average 10,166 MWh	High 13,216 MWh	Very high 17,282 MWh
2009	N/A	\$184,571	\$261,266	\$337,961	\$440,222
2010	N/A	\$215,302	\$305,050	\$394,797	\$514,460
Change	N/A	16.7%	16.8%	16.8%	16.9%

The charts below compare 2009 and 2010 network tariff charges for low, average and high users and show 2010 DUoS and Transmission charges as a proportion of the network charge for an average user. For both charts the peak to total energy ratio is 50% and the load factor is 55%.

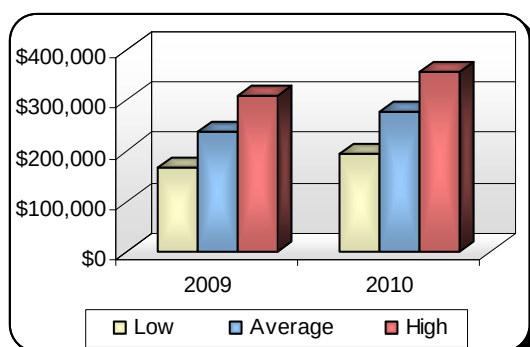

Network Tariff charge comparison
2009 vs 2010.

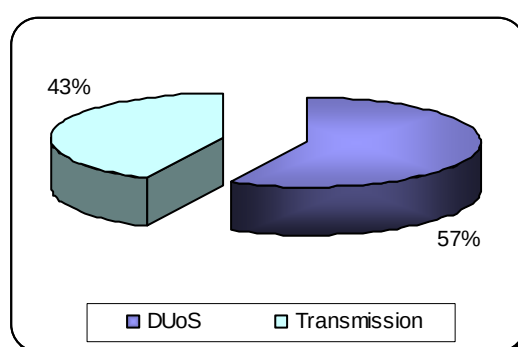

2010 DUoS and Transmission charges
as a proportion of the network charge
for an average user.

4.2.18 Large Business – HV (A400)


This is a Time of Use demand based network tariff applicable to HV commercial or industrial customers with annual consumption less than 55.0 GWh. The minimum chargeable demand is 1,000 kW. The peak rate applies to the period 7.00 AM to 11.00 PM Monday to Friday and the off-peak rate applies to all other times.

The impact of 2009 and 2010 'Large Business – HV' network tariff on customers is shown below.


Peak to Total Energy Ratio: 50% Load factor 55%					
	Very Low 2,271 MWh	Low 5,299 MWh	Average 7,571 MWh	High 9,842 MWh	Very high 12,870 MWh
2009	\$90,739	\$133,248	\$186,661	\$240,075	\$311,293
2010	\$100,233	\$152,476	\$213,966	\$275,456	\$357,443
Change	10.5%	14.4%	14.6%	14.7%	14.8%

Peak to Total Energy Ratio: 70% Load factor 55%					
	Very Low 2,271 MWh	Low 5,299 MWh	Average 7,571 MWh	High 9,842 MWh	Very high 12,870 MWh
2009	\$96,957	\$147,758	\$207,390	\$267,022	\$346,531
2010	\$107,769	\$170,060	\$239,086	\$308,112	\$400,146
Change	11.2%	15.1%	15.3%	15.4%	15.5%

The charts below compare 2009 and 2010 network tariff charges for low, average and high users and show 2010 DUoS and Transmission charges as a proportion of the network charge for an average user. For both charts the peak to total energy ratio is 50% and the load factor is 55%.

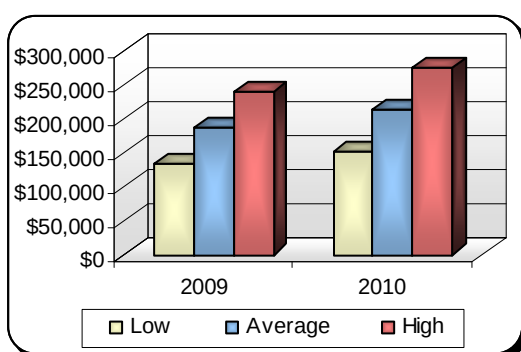

Network Tariff charge comparison
2009 vs 2010.

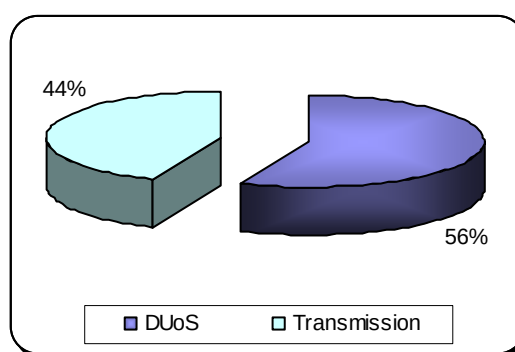

2010 DUoS and Transmission charges
as a proportion of the network charge
for an average user.

4.2.19 Large Business – HV_{RF} (A40R)


This Time of Use demand based network tariff has been closed to new entrants effective from 1 January 2007. The minimum chargeable demand is 1,000 kW. The peak rate applies to the period 7.00 AM to 11.00 PM Monday to Friday and the off-peak rate applies to all other times.

A comparison of the 2009 and 2010 'Large Business – HV_{RF}' network tariff charges for the five usage levels is shown below.


Peak to Total Energy Ratio: 50% Load factor 55%					
	Very Low 7,223 MWh	Low 16,854 MWh	Average 24,077 MWh	High 31,300 MWh	Very high 40,930 MWh
2009	\$155,982	\$352,471	\$499,837	\$647,203	\$843,692
2010	\$181,766	\$412,121	\$584,888	\$757,654	\$988,009
Change	16.5%	16.9%	17.0%	17.1%	17.1%

Peak to Total Energy Ratio: 70% Load factor 55%					
	Very Low 7,223 MWh	Low 16,854 MWh	Average 24,077 MWh	High 31,300 MWh	Very high 40,930 MWh
2009	\$175,759	\$398,616	\$565,759	\$732,902	\$955,759
2010	\$205,732	\$468,042	\$664,774	\$861,507	\$1,123,816
Change	17.1%	17.4%	17.5%	17.5%	17.6%

The charts below compare 2009 and 2010 network tariff charges for low, average and high users and show 2010 DUoS and Transmission charges as a proportion of the network charge for an average user. For both charts the peak to total energy ratio is 50% and the load factor is 55%.

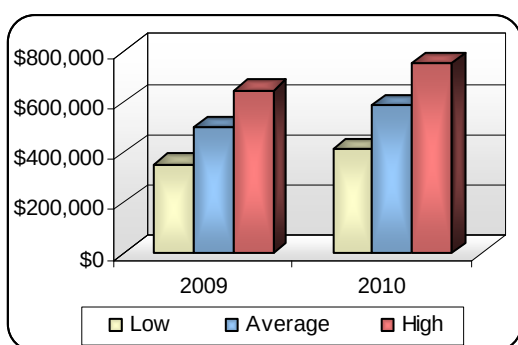

Network Tariff charge comparison
2009 vs 2010.

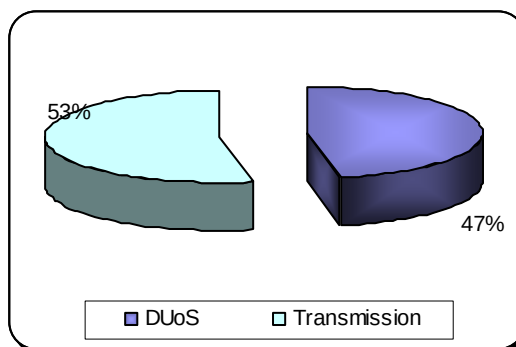

2010 DUoS and Transmission charges
as a proportion of the network charge
for an average user.

5 RATIONALE FOR AMENDMENT

The AER requires the distributor to provide:

- details of any tariff amendment that has occurred in comparison with the Tariff Strategy Report;
- justification for proposed tariff amendments; and
- details as to how the proposed tariff amendment satisfies the pricing principles and rebalancing constraints.

JEN has not introduced new tariff structures in 2010. The tariffs that JEN has proposed in its 2010 tariff submission to the AER are consistent with its 2006-2010 tariff strategy Report.

6 CONSULTATION

Distributors are required to provide details of consultation carried out with stakeholders for any amendment to the Tariff Strategy Report. Details must be provided including:

- who is on the stakeholder register and how it was established;
- what information was provided and how accessible it was;
- the timeliness of the provision of the information;
- the time which stakeholders were given to respond; and
- how issues raised by stakeholders were taken into account.

The tariffs that JEN has proposed in its 2010 tariff submission to the AER are consistent with its 2006-2010 tariff strategy Report.

APPENDIX 1 PROPOSED 2010 NETWORK TARIFFS (EXCLUSIVE OF GST)

Customer Class Code	Tariff Name	Units	Rate
---------------------	-------------	-------	------

Residential

Only available to residential customers

A100	General Purpose		
	<i>Single rate all times</i>		
	- Standing charge	\$/customer pa	\$19.800
	- Unit rate	¢/kWh	6.449

A101 / F101*	Time of Use Interval Meter		
	<i>Available to customers with an interval meter</i>		
	<i>Peak: 7.00 AM to 11 PM "Mon - Fri" ; Off peak all other times</i>		
	- Standing charge	\$/customer pa	\$19.800
	- Peak Unit rate	¢/kWh	10.179
	- Off Peak Unit rate	¢/kWh	1.957

A140	Time of Use (closed to new entrants)		
	<i>This tariff is not available to existing customers that install an interval meter</i>		
	<i>Peak: 7.00 AM to 11 PM "Mon - Fri" ; Off peak all other times</i>		
	- Standing charge	\$/customer pa	\$34.440
	- Peak Unit rate	¢/kWh	8.131
	- Off Peak Unit rate	¢/kWh	1.867

A180	Off Peak Heating Only		
	<i>Available as a complementary tariff to the "Residential - General Purpose" A100 tariff only.</i>		
	<i>This tariff is not available to new or existing customers that install embedded generation**</i>		
	<i>11.00 PM to 7.00 AM all days</i>		
	- Standing charge	\$/customer pa	\$0.000
	- Off Peak Unit rate	¢/kWh	1.641

Small Business

Only available to customers:

- a) with annual consumption < 0.4 GWh AND maximum demand < 150 kVA (120 kW); and
- b) where supply is not taken from an on-site OR dedicated substation

A200	General Purpose		
	<i>Only available to customers with a single rate accumulation meter</i>		
	<i>Single rate all times</i>		
	- Standing charge	\$/customer pa	\$50.160
	- Unit rate	¢/kWh	7.349

Customer Class Code	Tariff Name	Units	Rate
A210 / F210* Time of Use Weekdays			
Only available to customers with a two rate accumulation meter OR to customers consuming < 160 MWh pa and having a maximum demand < 60 kW			
<i>Peak: 7.00 AM to 11 PM "Mon - Fri" ; Off peak all other times</i>			
- Standing charge		\$/customer pa	\$90.120
- Peak Unit rate		¢/kWh	8.874
- Off Peak Unit rate		¢/kWh	1.945
A230 / F230* Time of Use Weekdays - Demand			
Only available to customers with a meter capable of measuring demand			
<i>Peak: 7.00 AM to 11 PM "Mon - Fri" ; Off peak all other times</i>			
- Standing charge		\$/customer pa	\$251.880
- Peak Unit rate		¢/kWh	5.251
- Off Peak Unit rate		¢/kWh	1.908
- Demand rate		\$/kW pa	\$45.828
Minimum Chargeable Demand		60 kW	
A250 / F250* Time of Use Extended			
Only available to customers with a two rate accumulation meter OR to customers consuming < 160 MWh pa and having a maximum demand < 60 kW			
<i>Peak: 7.00 AM to 11 PM "Mon - Sun" ; Off peak all other times</i>			
- Standing charge		\$/customer pa	\$90.120
- Peak Unit rate		¢/kWh	7.832
- Off Peak Unit rate		¢/kWh	2.060
A270 / F270* Time of Use Extended - Demand			
Only available to customers with a meter capable of measuring demand			
<i>Peak: 7.00 AM to 11 PM "Mon - Sun" ; Off peak all other times</i>			
- Standing charge		\$/customer pa	\$251.880
- Peak Unit rate		¢/kWh	4.310
- Off Peak Unit rate		¢/kWh	2.019
- Demand rate		\$/kW pa	\$45.828
Minimum Chargeable Demand		60 kW	
A290 Unmetered Supply			
<i>Peak: 7.00 AM to 11 PM "Mon - Fri" ; Off peak all other times</i>			
- Peak Unit rate		¢/kWh	7.732
- Off Peak Unit rate		¢/kWh	1.895

Customer Class Code	Tariff Name	Units	Rate
---------------------	-------------	-------	------

Large Business

Low Voltage Tariffs (nominal voltage < 1000 Volts)

Only available to customers:

- a) with annual consumption ≥ 0.4 GWh OR maximum demand ≥ 150 kVA (120 kW); or
- b) taking supply from an on-site OR dedicated substation

A300 / F300⁺ LV 0.4 - 0.8 GWh

Only available to customers consuming ≤ 0.8 GWh pa

Peak: 7.00 AM to 11 PM "Mon - Fri" ; Off peak all other times

- Standing charge	\$/customer pa	\$1,584.000
- Peak Unit rate	¢/kWh	3.026
- Off Peak Unit rate	¢/kWh	1.109
- Demand rate	\$/kW pa	\$75.072
Minimum Chargeable Demand	120 kW	

A30E LV_{EN} Annual Consumption ≤ 0.8 GWh

Only available to embedded network customers consuming ≤ 0.8 GWh pa

Peak: 7.00 AM to 11 PM "Mon - Fri" ; Off peak all other times

- Standing charge	\$/customer pa	\$1,584.000
- Peak Unit rate	¢/kWh	2.944
- Off Peak Unit rate	¢/kWh	1.109
- Demand rate	\$/kW pa	\$78.924
Minimum Chargeable Demand	120 kW	

A320 LV 0.8⁺ - 2.2 GWh

Only available to customers consuming > 0.8 GWh pa BUT ≤ 2.2 GWh pa

Peak: 7.00 AM to 11 PM "Mon - Fri" ; Off peak all other times

- Standing charge	\$/customer pa	\$3,012.000
- Peak Unit rate	¢/kWh	2.613
- Off Peak Unit rate	¢/kWh	1.084
- Demand rate	\$/kW pa	\$69.336
Minimum Chargeable Demand	250 kW	

A32E LV_{EN} 0.8⁺ - 2.2 GWh

Only available to customers consuming > 0.8 GWh pa BUT ≤ 2.2 GWh pa

Peak: 7.00 AM to 11 PM "Mon - Fri" ; Off peak all other times

- Standing charge	\$/customer pa	\$3,012.000
- Peak Unit rate	¢/kWh	2.424
- Off Peak Unit rate	¢/kWh	1.084
- Demand rate	\$/kW pa	\$70.956
Minimum Chargeable Demand	250 kW	

Customer Class Code	Tariff Name	Units	Rate
A340	LV 2.2⁺ - 6.0 GWh		
Only available to customers consuming > 2.2 GWh pa BUT ≤ 6.0 GWh pa			
<i>Peak: 7.00 AM to 11 PM "Mon - Fri" ; Off peak all other times</i>			
- Standing charge		\$/customer pa	\$5,148.000
- Peak Unit rate		¢/kWh	2.617
- Off Peak Unit rate		¢/kWh	0.978
- Demand rate		\$/kW pa	\$69.108
Minimum Chargeable Demand		250 kW	
A34E	LV_{EN} 2.2⁺ - 6.0 GWh		
Only available to customers consuming > 2.2 GWh pa BUT ≤ 6.0 GWh pa			
<i>Peak: 7.00 AM to 11 PM "Mon - Fri" ; Off peak all other times</i>			
- Standing charge		\$/customer pa	\$5,148.000
- Peak Unit rate		¢/kWh	2.213
- Off Peak Unit rate		¢/kWh	0.978
- Demand rate		\$/kW pa	\$70.428
Minimum Chargeable Demand		250 kW	
A34M	LV_{MS} 2.2⁺ - 6.0 GWh		
Only available to a customer, other than an embedded network customer, taking supply from multiple supply points on a single site AND the aggregated annual consumption from those supply points is > 2.2 GWh BUT ≤ 6.0 GWh***			
<i>Peak: 7.00 AM to 11 PM "Mon - Fri" ; Off peak all other times</i>			
- Standing charge		\$/customer pa	\$3,654.000
- Peak Unit rate		¢/kWh	2.678
- Off Peak Unit rate		¢/kWh	0.978
- Demand rate		\$/kW pa	\$49.920
Minimum Chargeable Demand		250 kW	
A370	LV 6.0⁺ GWh		
Only available to customers consuming > 6.0 GWh pa			
<i>Peak: 7.00 AM to 11 PM "Mon - Fri" ; Off peak all other times</i>			
- Standing charge		\$/customer pa	\$7,836.000
- Peak Unit rate		¢/kWh	2.338
- Off Peak Unit rate		¢/kWh	0.939
- Demand rate		\$/kW pa	\$65.844
Minimum Chargeable Demand		450 kW	

Customer Class Code	Tariff Name	Units	Rate
A37E	LV_{EN} 6.0⁺ GWh		
	Only available to embedded network customers consuming > 6.0 GWh pa <i>Peak: 7.00 AM to 11 PM "Mon - Fri" ; Off peak all other times</i>		
	- Standing charge	\$/customer pa	\$7,836.000
	- Peak Unit rate	¢/kWh	2.389
	- Off Peak Unit rate	¢/kWh	0.939
	- Demand rate	\$/kW pa	\$67.176
	Minimum Chargeable Demand	450 kW	
A37M	LV_{MS} 6.0⁺ GWh		
	Only available to a customer, other than an embedded network customer, taking supply from multiple supply points on a single site AND the aggregated annual consumption from those supply points is > 6.0 GWh*** <i>Peak: 7.00 AM to 11 PM "Mon - Fri" ; Off peak all other times</i>		
	- Standing charge	\$/customer pa	\$5,892.000
	- Peak Unit rate	¢/kWh	2.396
	- Off Peak Unit rate	¢/kWh	0.939
	- Demand rate	\$/kW pa	\$47.400
	Minimum Chargeable Demand	450 kW	
High Voltage Tariffs (nominal voltage ≥ 1000 Volts AND ≤ 22,000 Volts)			
A400	HV		
	Only available to customers consuming < 55 GWh pa <i>Peak: 7.00 AM to 11 PM "Mon - Fri" ; Off peak all other times.</i>		
	- Standing charge	\$/customer pa	\$9,000.000
	- Peak Unit rate	¢/kWh	2.369
	- Off Peak Unit rate	¢/kWh	0.710
	- Demand rate	\$/kW pa	\$56.268
	Minimum Chargeable Demand	1,000 kW	
A40E	HV_{EN} Annual Consumption ≤ 10 GWh		
	Only available to embedded network customers consuming ≤ 10 GWh pa <i>Peak: 7.00 AM to 11 PM "Mon - Fri" ; Off peak all other times</i>		
	- Standing charge	\$/customer pa	\$9,000.000
	- Peak Unit rate	¢/kWh	2.142
	- Off Peak Unit rate	¢/kWh	0.710
	- Demand rate	\$/kW pa	\$56.880
	Minimum Chargeable Demand	1,000 kW	

Customer Class Code	Tariff Name	Units	Rate
A40R	HV_{RF} (closed to new entrants)		
	<i>Peak: 7.00 AM to 11 PM "Mon - Fri" ; Off peak all other times.</i>		
	- Standing charge	\$/customer pa	\$9,000.000
	- Peak Unit rate	¢/kWh	2.369
	- Off Peak Unit rate	¢/kWh	0.710
	- Demand rate	\$/kW pa	\$41.068
	Minimum Chargeable Demand	1,000 kW	
A42E	HV_{EN} 10⁺ GWh		
	Only available to embedded network customers consuming > 10 GWh pa		
	<i>Peak: 7.00 AM to 11 PM "Mon - Fri" ; Off peak all other times</i>		
	- Standing charge	\$/customer pa	\$9,000.000
	- Peak Unit rate	¢/kWh	2.130
	- Off Peak Unit rate	¢/kWh	0.710
	- Demand rate	\$/kW pa	\$56.940
	Minimum Chargeable Demand	2,000 kW	
A480	HV - Annual Consumption ≥ 55 GWh		
	Only available to customers consuming ≥ 55 GWh pa		
	<i>Peak: 7.00 AM to 11 PM "Mon - Fri" ; Off peak all other times</i>		
	- Standing charge	\$/customer pa	\$10,008.000
	- Peak Unit rate	¢/kWh	2.276
	- Off Peak Unit rate	¢/kWh	0.672
	- Demand rate	\$/kW pa	\$51.324
	Minimum Chargeable Demand	10,000 kW	
Subtransmission Tariffs (nominal voltage > 22,000 Volts)			
A500	Subtransmission		
	<i>Peak: 7.00 AM to 11 PM "Mon - Fri" ; Off peak all other times</i>		
	- Standing charge	\$/customer pa	\$34,428.000
	- Peak Unit rate	¢/kWh	1.567
	- Off Peak Unit rate	¢/kWh	0.408
	- Demand rate	\$/kW pa	\$18.000
	Minimum Chargeable Demand	15,000 kW	
A50A	Subtransmission MA		
	<i>Peak: 7.00 AM to 11 PM "Mon - Fri" ; Off peak all other times</i>		
	- Standing charge	\$/customer pa	\$34,428.000
	- Peak Unit rate	¢/kWh	1.567
	- Off Peak Unit rate	¢/kWh	0.408
	- Demand rate	\$/kW pa	\$18.000
	Minimum Chargeable Demand	15,000 kW	

Customer Class Code	Tariff Name	Units	Rate
A50E	Subtransmission EG		
	Available to Embedded Generators connected to TTS-SSS-ST-EPG-TTS Loop.		
	<i>Peak: 7.00 AM to 11 PM "Mon - Fri" ; Off peak all other times</i>		
	- Standing charge	\$/customer pa	\$23,364.000
	- Peak Unit rate	¢/kWh	1.563
	- Off Peak Unit rate	¢/kWh	0.406
	- Demand rate	\$/kW pa	\$6.396
	Minimum Chargeable Demand	15,000 kW	

* A tariff code starting with the letter "F" indicates that the tariff attracts the feed in tariff rebate. Tariff reassignment requests to a tariff starting with the letter "F" can only be made by the customer's retailer.

** The installation of an embedded generation by an existing customer is considered a change in load characteristic and as such the A180 tariff is not supported. The metering and data recording for a co-generation site has additional regulated requirements to that of a standard site. It is not technically feasible to meet these requirements and at the same time be able to separately measure, control and bill a load controlled heating.

*** Other terms and conditions apply

The *Deemed Distribution Contract* and Jemena Electricity Networks' *Policy for Resetting Contract Demand* form part of the terms and conditions related to these prices. These documents can be viewed or downloaded from the following Website:

<http://www.jemena.com.au/operations/distribution/JEN/default.aspx>

APPENDIX 2 PROPOSED 2010 DISTRIBUTION TARIFFS (EXCLUSIVE OF GST)

Customer Class Code	Tariff Name	Units	Rate
---------------------	-------------	-------	------

Residential

Only available to residential customers

A100	General Purpose		
	<i>Single rate all times</i>		
	- Standing charge	\$/customer pa	\$16.080
	- Unit rate	¢/kWh	5.585

A101 / F101*	Time of Use Interval Meter		
	<i>Available to customers with an interval meter</i>		
	<i>Peak: 7.00 AM to 11 PM "Mon - Fri" ; Off peak all other times</i>		
	- Standing charge	\$/customer pa	\$16.080
	- Peak Unit rate	¢/kWh	8.964
	- Off Peak Unit rate	¢/kWh	1.516

A140	Time of Use (closed to new entrants)		
	<i>This tariff is not available to existing customers that install an interval meter</i>		
	<i>Peak: 7.00 AM to 11 PM "Mon - Fri" ; Off peak all other times</i>		
	- Standing charge	\$/customer pa	\$28.800
	- Peak Unit rate	¢/kWh	6.745
	- Off Peak Unit rate	¢/kWh	1.156

A180	Off Peak Heating Only		
	<i>Available as a complementary tariff to the "Residential - General Purpose" A100 tariff only.</i>		
	<i>This tariff is not available to new or existing customers that install embedded generation**</i>		
	<i>11.00 PM to 7.00 AM all days</i>		
	- Standing charge	\$/customer pa	\$0.000
	- Off Peak Unit rate	¢/kWh	1.123

Small Business

Only available to customers:

- a) with annual consumption < 0.4 GWh AND maximum demand < 150 kVA (120 kW); and
- b) where supply is not taken from an on-site OR dedicated substation

A200	General Purpose		
	<i>Only available to customers with a single rate accumulation meter</i>		
	<i>Single rate all times</i>		
	- Standing charge	\$/customer pa	\$43.200
	- Unit rate	¢/kWh	6.166

Customer Class Code	Tariff Name	Units	Rate
A210 / F210* Time of Use Weekdays			
Only available to customers with a two rate accumulation meter OR to customers consuming < 160 MWh pa and having a maximum demand < 60 kW			
<i>Peak: 7.00 AM to 11 PM "Mon - Fri" ; Off peak all other times</i>			
- Standing charge		\$/customer pa	\$61.200
- Peak Unit rate		¢/kWh	7.348
- Off Peak Unit rate		¢/kWh	1.232
A230 / F230* Time of Use Weekdays - Demand			
Only available to customers with a meter capable of measuring demand			
<i>Peak: 7.00 AM to 11 PM "Mon - Fri" ; Off peak all other times</i>			
- Standing charge		\$/customer pa	\$50.400
- Peak Unit rate		¢/kWh	3.900
- Off Peak Unit rate		¢/kWh	1.195
- Demand rate		\$/kW pa	\$40.896
Minimum Chargeable Demand		60 kW	
A250 / F250* Time of Use Extended			
Only available to customers with a two rate accumulation meter OR to customers consuming < 160 MWh pa and having a maximum demand < 60 kW			
<i>Peak: 7.00 AM to 11 PM "Mon - Sun" ; Off peak all other times</i>			
- Standing charge		\$/customer pa	\$61.200
- Peak Unit rate		¢/kWh	6.468
- Off Peak Unit rate		¢/kWh	1.347
A270 / F270* Time of Use Extended - Demand			
Only available to customers with a meter capable of measuring demand			
<i>Peak: 7.00 AM to 11 PM "Mon - Sun" ; Off peak all other times</i>			
- Standing charge		\$/customer pa	\$50.400
- Peak Unit rate		¢/kWh	3.156
- Off Peak Unit rate		¢/kWh	1.306
- Demand rate		\$/kW pa	\$40.896
Minimum Chargeable Demand		60 kW	
A290 Unmetered Supply			
<i>Peak: 7.00 AM to 11 PM "Mon - Fri" ; Off peak all other times</i>			
- Peak Unit rate		¢/kWh	7.052
- Off Peak Unit rate		¢/kWh	1.218

Customer Class Code	Tariff Name	Units	Rate
---------------------	-------------	-------	------

Large Business

Low Voltage Tariffs (nominal voltage < 1000 Volts)

Only available to customers:

- a) with annual consumption ≥ 0.4 GWh OR maximum demand ≥ 150 kVA (120 kW); or
- b) taking supply from an on-site OR dedicated substation

A300 / F300* LV 0.4 - 0.8 GWh

Only available to customers consuming ≤ 0.8 GWh pa

Peak: 7.00 AM to 11 PM "Mon - Fri" ; Off peak all other times

- Standing charge	\$/customer pa	\$1,188.000
- Peak Unit rate	¢/kWh	1.266
- Off Peak Unit rate	¢/kWh	0.430
- Demand rate	\$/kW pa	\$71.460
Minimum Chargeable Demand	120 kW	

A30E LV_{EN} Annual Consumption ≤ 0.8 GWh

Only available to embedded network customers consuming ≤ 0.8 GWh pa

Peak: 7.00 AM to 11 PM "Mon - Fri" ; Off peak all other times

- Standing charge	\$/customer pa	\$1,188.000
- Peak Unit rate	¢/kWh	1.320
- Off Peak Unit rate	¢/kWh	0.430
- Demand rate	\$/kW pa	\$75.312
Minimum Chargeable Demand	120 kW	

A320 LV 0.8⁺ - 2.2 GWh

Only available to customers consuming > 0.8 GWh pa BUT ≤ 2.2 GWh pa

Peak: 7.00 AM to 11 PM "Mon - Fri" ; Off peak all other times

- Standing charge	\$/customer pa	\$1,956.000
- Peak Unit rate	¢/kWh	0.820
- Off Peak Unit rate	¢/kWh	0.404
- Demand rate	\$/kW pa	\$65.232
Minimum Chargeable Demand	250 kW	

A32E LV_{EN} 0.8⁺ - 2.2 GWh

Only available to customers consuming > 0.8 GWh pa BUT ≤ 2.2 GWh pa

Peak: 7.00 AM to 11 PM "Mon - Fri" ; Off peak all other times

- Standing charge	\$/customer pa	\$1,956.000
- Peak Unit rate	¢/kWh	0.829
- Off Peak Unit rate	¢/kWh	0.404
- Demand rate	\$/kW pa	\$66.852
Minimum Chargeable Demand	250 kW	

Customer Class Code	Tariff Name	Units	Rate
A340	LV 2.2⁺ - 6.0 GWh		
Only available to customers consuming > 2.2 GWh pa BUT ≤ 6.0 GWh pa			
<i>Peak: 7.00 AM to 11 PM "Mon - Fri" ; Off peak all other times</i>			
- Standing charge	\$/customer pa		\$2,988.000
- Peak Unit rate	¢/kWh		0.752
- Off Peak Unit rate	¢/kWh		0.298
- Demand rate	\$/kW pa		\$63.948
Minimum Chargeable Demand	250 kW		
A34E	LV_{EN} 2.2⁺ - 6.0 GWh		
Only available to customers consuming > 2.2 GWh pa BUT ≤ 6.0 GWh pa			
<i>Peak: 7.00 AM to 11 PM "Mon - Fri" ; Off peak all other times</i>			
- Standing charge	\$/customer pa		\$2,988.000
- Peak Unit rate	¢/kWh		0.752
- Off Peak Unit rate	¢/kWh		0.298
- Demand rate	\$/kW pa		\$65.268
Minimum Chargeable Demand	250 kW		
A34M	LV_{MS} 2.2⁺ - 6.0 GWh		
Only available to a customer, other than an embedded network customer, taking supply from multiple supply points on a single site AND the aggregated annual consumption from those supply points is > 2.2 GWh BUT ≤ 6.0 GWh***			
<i>Peak: 7.00 AM to 11 PM "Mon - Fri" ; Off peak all other times</i>			
- Standing charge	\$/customer pa		\$1,494.000
- Peak Unit rate	¢/kWh		0.745
- Off Peak Unit rate	¢/kWh		0.298
- Demand rate	\$/kW pa		\$44.760
Minimum Chargeable Demand	250 kW		
A370	LV 6.0⁺ GWh		
Only available to customers consuming > 6.0 GWh pa			
<i>Peak: 7.00 AM to 11 PM "Mon - Fri" ; Off peak all other times</i>			
- Standing charge	\$/customer pa		\$3,888.000
- Peak Unit rate	¢/kWh		0.730
- Off Peak Unit rate	¢/kWh		0.259
- Demand rate	\$/kW pa		\$61.488
Minimum Chargeable Demand	450 kW		

Customer Class Code	Tariff Name	Units	Rate
---------------------	-------------	-------	------

A37E LV_{EN} 6.0⁺ GWh

Only available to embedded network customers consuming > 6.0 GWh pa

Peak: 7.00 AM to 11 PM "Mon - Fri" ; Off peak all other times

- Standing charge	\$/customer pa	\$3,888.000
- Peak Unit rate	¢/kWh	0.743
- Off Peak Unit rate	¢/kWh	0.259
- Demand rate	\$/kW pa	\$62.820
Minimum Chargeable Demand	450 kW	

A37M LV_{MS} 6.0⁺ GWh

Only available to a customer, other than an embedded network customer, taking supply from multiple supply points on a single site AND the aggregated annual consumption from those supply points is > 6.0 GWh***

Peak: 7.00 AM to 11 PM "Mon - Fri" ; Off peak all other times

- Standing charge	\$/customer pa	\$1,944.000
- Peak Unit rate	¢/kWh	0.730
- Off Peak Unit rate	¢/kWh	0.259
- Demand rate	\$/kW pa	\$43.044
Minimum Chargeable Demand	450 kW	

High Voltage Tariffs (nominal voltage ≥ 1000 Volts AND ≤ 22,000 Volts)**A400 HV**

Only available to customers consuming < 55 GWh pa

Peak: 7.00 AM to 11 PM "Mon - Fri" ; Off peak all other times.

- Standing charge	\$/customer pa	\$2,064.000
- Peak Unit rate	¢/kWh	0.570
- Off Peak Unit rate	¢/kWh	0.137
- Demand rate	\$/kW pa	\$51.120
Minimum Chargeable Demand	1,000 kW	

A40E HV_{EN} Annual Consumption ≤ 10 GWh

Only available to embedded network customers consuming ≤ 10 GWh pa

Peak: 7.00 AM to 11 PM "Mon - Fri" ; Off peak all other times

- Standing charge	\$/customer pa	\$2,064.000
- Peak Unit rate	¢/kWh	0.590
- Off Peak Unit rate	¢/kWh	0.137
- Demand rate	\$/kW pa	\$52.356
Minimum Chargeable Demand	1,000 kW	

Customer Class Code	Tariff Name	Units	Rate
A40R	HV_{RF} (closed to new entrants)		
	<i>Peak: 7.00 AM to 11 PM "Mon - Fri" ; Off peak all other times.</i>		
	- Standing charge	\$/customer pa	\$2,064.000
	- Peak Unit rate	¢/kWh	0.570
	- Off Peak Unit rate	¢/kWh	0.137
	- Demand rate	\$/kW pa	\$37.140
	Minimum Chargeable Demand	1,000 kW	
A42E	HV_{EN} 10⁺ GWh		
	Only available to embedded network customers consuming > 10 GWh pa		
	<i>Peak: 7.00 AM to 11 PM "Mon - Fri" ; Off peak all other times</i>		
	- Standing charge	\$/customer pa	\$2,064.000
	- Peak Unit rate	¢/kWh	0.594
	- Off Peak Unit rate	¢/kWh	0.137
	- Demand rate	\$/kW pa	\$52.020
	Minimum Chargeable Demand	2,000 kW	
A480	HV - Annual Consumption ≥ 55 GWh		
	Only available to customers consuming ≥ 55 GWh pa		
	<i>Peak: 7.00 AM to 11 PM "Mon - Fri" ; Off peak all other times</i>		
	- Standing charge	\$/customer pa	\$2,052.000
	- Peak Unit rate	¢/kWh	0.553
	- Off Peak Unit rate	¢/kWh	0.099
	- Demand rate	\$/kW pa	\$47.520
	Minimum Chargeable Demand	10,000 kW	
Subtransmission Tariffs (nominal voltage > 22,000 Volts)			
A500	Subtransmission		
	<i>Peak: 7.00 AM to 11 PM "Mon - Fri" ; Off peak all other times</i>		
	- Standing charge	\$/customer pa	\$16,140.000
	- Peak Unit rate	¢/kWh	0.090
	- Off Peak Unit rate	¢/kWh	0.019
	- Demand rate	\$/kW pa	\$14.772
	Minimum Chargeable Demand	15,000 kW	
A50A	Subtransmission MA		
	<i>Peak: 7.00 AM to 11 PM "Mon - Fri" ; Off peak all other times</i>		
	- Standing charge	\$/customer pa	\$16,140.000
	- Peak Unit rate	¢/kWh	0.090
	- Off Peak Unit rate	¢/kWh	0.019
	- Demand rate	\$/kW pa	\$14.772
	Minimum Chargeable Demand	15,000 kW	

Customer Class Code	Tariff Name	Units	Rate
A50E	Subtransmission EG		
	Available to Embedded Generators connected to TTS-SSS-ST-EPG-TTS Loop.		
	<i>Peak: 7.00 AM to 11 PM "Mon - Fri" ; Off peak all other times</i>		
	- Standing charge	\$/customer pa	\$16,140.000
	- Peak Unit rate	¢/kWh	0.086
	- Off Peak Unit rate	¢/kWh	0.017
	- Demand rate	\$/kW pa	\$2.952
	Minimum Chargeable Demand	15,000 kW	

* A tariff code starting with the letter "F" indicates that the tariff attracts the feed in tariff rebate.

** The installation of an embedded generation by an existing customer is considered a change in load characteristic and as such the A180 tariff is not supported. The metering and data recording for a co-generation site has additional regulated requirements to that of a standard site. It is not technically feasible to meet these requirements and at the same time be able to separately measure, control and bill a load controlled heating.

*** Other terms and conditions apply

The *Deemed Distribution Contract* and Jemena Electricity Networks' *Policy for Resetting Contract Demand* form part of the terms and conditions related to these prices. These documents can be viewed or downloaded from the following Website:

<http://www.jemena.com.au/operations/distribution/JEN/default.aspx>

APPENDIX 3 PROPOSED 2010 TRANSMISSION TARIFFS (EXCLUSIVE OF GST)

This tariff schedule includes the PFIT pass through costs rates shown in Appendix 4.

Customer Class Code	Tariff Name	Units	Rate
Residential			
Only available to residential customers			
A100	General Purpose		
	<i>Single rate all times</i>		
	- Standing charge	\$/customer pa	\$3.720
	- Unit rate	¢/kWh	0.864
A101 / F101*	Time of Use Interval Meter		
	Available to customers with an interval meter		
	<i>Peak: 7.00 AM to 11 PM "Mon - Fri" ; Off peak all other times</i>		
	- Standing charge	\$/customer pa	\$3.720
	- Peak Unit rate	¢/kWh	1.215
	- Off Peak Unit rate	¢/kWh	0.441
A140	Time of Use (closed to new entrants)		
	This tariff is not available to existing customers that install an interval meter		
	<i>Peak: 7.00 AM to 11 PM "Mon - Fri" ; Off peak all other times</i>		
	- Standing charge	\$/customer pa	\$5.640
	- Peak Unit rate	¢/kWh	1.386
	- Off Peak Unit rate	¢/kWh	0.711
A180	Off Peak Heating Only		
	Available as a complementary tariff to the "Residential - General Purpose" A100 tariff only.		
	This tariff is not available to new or existing customers that install embedded generation**		
	<i>11.00 PM to 7.00 AM all days</i>		
	- Standing charge	\$/customer pa	\$0.000
	- Off Peak Unit rate	¢/kWh	0.518
Small Business			
Only available to customers:			
a) with annual consumption < 0.4 GWh AND maximum demand < 150 kVA (120 kW); and			
b) where supply is not taken from an on-site OR dedicated substation			
A200	General Purpose		
	Only available to customers with a single rate accumulation meter		
	<i>Single rate all times</i>		
	- Standing charge	\$/customer pa	\$6.960
	- Unit rate	¢/kWh	1.183

Customer Class Code	Tariff Name	Units	Rate
A210 / F210* Time of Use Weekdays			
Only available to customers with a two rate accumulation meter OR to customers consuming < 160 MWh pa and having a maximum demand < 60 kW			
<i>Peak: 7.00 AM to 11 PM "Mon - Fri" ; Off peak all other times</i>			
- Standing charge		\$/customer pa	\$28.920
- Peak Unit rate		¢/kWh	1.526
- Off Peak Unit rate		¢/kWh	0.713
A230 / F230* Time of Use Weekdays - Demand			
Only available to customers with a meter capable of measuring demand			
<i>Peak: 7.00 AM to 11 PM "Mon - Fri" ; Off peak all other times</i>			
- Standing charge		\$/customer pa	\$201.480
- Peak Unit rate		¢/kWh	1.351
- Off Peak Unit rate		¢/kWh	0.713
- Demand rate		\$/kW pa	\$4.932
Minimum Chargeable Demand		60 kW	
A250 / F250* Time of Use Extended			
Only available to customers with a two rate accumulation meter OR to customers consuming < 160 MWh pa and having a maximum demand < 60 kW			
<i>Peak: 7.00 AM to 11 PM "Mon - Sun" ; Off peak all other times</i>			
- Standing charge		\$/customer pa	\$28.920
- Peak Unit rate		¢/kWh	1.364
- Off Peak Unit rate		¢/kWh	0.713
A270 / F270* Time of Use Extended - Demand			
Only available to customers with a meter capable of measuring demand			
<i>Peak: 7.00 AM to 11 PM "Mon - Sun" ; Off peak all other times</i>			
- Standing charge		\$/customer pa	\$201.480
- Peak Unit rate		¢/kWh	1.154
- Off Peak Unit rate		¢/kWh	0.713
- Demand rate		\$/kW pa	\$4.932
Minimum Chargeable Demand		60 kW	
A290 Unmetered Supply			
<i>Peak: 7.00 AM to 11 PM "Mon - Fri" ; Off peak all other times</i>			
- Peak Unit rate		¢/kWh	0.680
- Off Peak Unit rate		¢/kWh	0.677

Customer Class Code	Tariff Name	Units	Rate
---------------------	-------------	-------	------

Large Business

Low Voltage Tariffs (nominal voltage < 1000 Volts)

Only available to customers:

- a) with annual consumption ≥ 0.4 GWh OR maximum demand ≥ 150 kVA (120 kW); or
- b) taking supply from an on-site OR dedicated substation

A300 / F300⁺ LV 0.4 - 0.8 GWh

Only available to customers consuming ≤ 0.8 GWh pa

Peak: 7.00 AM to 11 PM "Mon - Fri" ; Off peak all other times

- Standing charge	\$/customer pa	\$396.000
- Peak Unit rate	¢/kWh	1.760
- Off Peak Unit rate	¢/kWh	0.679
- Demand rate	\$/kW pa	\$3.612
Minimum Chargeable Demand	120 kW	

A30E LV_{EN} Annual Consumption ≤ 0.8 GWh

Only available to embedded network customers consuming ≤ 0.8 GWh pa

Peak: 7.00 AM to 11 PM "Mon - Fri" ; Off peak all other times

- Standing charge	\$/customer pa	\$396.000
- Peak Unit rate	¢/kWh	1.624
- Off Peak Unit rate	¢/kWh	0.679
- Demand rate	\$/kW pa	\$3.612
Minimum Chargeable Demand	120 kW	

A320 LV 0.8⁺ - 2.2 GWh

Only available to customers consuming > 0.8 GWh pa BUT ≤ 2.2 GWh pa

Peak: 7.00 AM to 11 PM "Mon - Fri" ; Off peak all other times

- Standing charge	\$/customer pa	\$1,056.000
- Peak Unit rate	¢/kWh	1.793
- Off Peak Unit rate	¢/kWh	0.680
- Demand rate	\$/kW pa	\$4.104
Minimum Chargeable Demand	250 kW	

A32E LV_{EN} 0.8⁺ - 2.2 GWh

Only available to customers consuming > 0.8 GWh pa BUT ≤ 2.2 GWh pa

Peak: 7.00 AM to 11 PM "Mon - Fri" ; Off peak all other times

- Standing charge	\$/customer pa	\$1,056.000
- Peak Unit rate	¢/kWh	1.595
- Off Peak Unit rate	¢/kWh	0.680
- Demand rate	\$/kW pa	\$4.104
Minimum Chargeable Demand	250 kW	

Customer Class Code	Tariff Name	Units	Rate
A340	LV 2.2⁺ - 6.0 GWh		
Only available to customers consuming > 2.2 GWh pa BUT ≤ 6.0 GWh pa			
<i>Peak: 7.00 AM to 11 PM "Mon - Fri" ; Off peak all other times</i>			
- Standing charge		\$/customer pa	\$2,160.000
- Peak Unit rate		¢/kWh	1.865
- Off Peak Unit rate		¢/kWh	0.680
- Demand rate		\$/kW pa	\$5.160
Minimum Chargeable Demand		250 kW	
A34E	LV_{EN} 2.2⁺ - 6.0 GWh		
Only available to customers consuming > 2.2 GWh pa BUT ≤ 6.0 GWh pa			
<i>Peak: 7.00 AM to 11 PM "Mon - Fri" ; Off peak all other times</i>			
- Standing charge		\$/customer pa	\$2,160.000
- Peak Unit rate		¢/kWh	1.461
- Off Peak Unit rate		¢/kWh	0.680
- Demand rate		\$/kW pa	\$5.160
Minimum Chargeable Demand		250 kW	
A34M	LV_{MS} 2.2⁺ - 6.0 GWh		
Only available to a customer, other than an embedded network customer, taking supply from multiple supply points on a single site AND the aggregated annual consumption from those supply points is > 2.2 GWh BUT ≤ 6.0 GWh***			
<i>Peak: 7.00 AM to 11 PM "Mon - Fri" ; Off peak all other times</i>			
- Standing charge		\$/customer pa	\$2,160.000
- Peak Unit rate		¢/kWh	1.933
- Off Peak Unit rate		¢/kWh	0.680
- Demand rate		\$/kW pa	\$5.160
Minimum Chargeable Demand		250 kW	
A370	LV 6.0⁺ GWh		
Only available to customers consuming > 6.0 GWh pa			
<i>Peak: 7.00 AM to 11 PM "Mon - Fri" ; Off peak all other times</i>			
- Standing charge		\$/customer pa	\$3,948.000
- Peak Unit rate		¢/kWh	1.608
- Off Peak Unit rate		¢/kWh	0.680
- Demand rate		\$/kW pa	\$4.356
Minimum Chargeable Demand		450 kW	

Customer Class Code	Tariff Name	Units	Rate
A37E	LV_{EN} 6.0⁺ GWh		
	Only available to embedded network customers consuming > 6.0 GWh pa <i>Peak: 7.00 AM to 11 PM "Mon - Fri" ; Off peak all other times</i>		
	- Standing charge	\$/customer pa	\$3,948.000
	- Peak Unit rate	¢/kWh	1.646
	- Off Peak Unit rate	¢/kWh	0.680
	- Demand rate	\$/kW pa	\$4.356
	Minimum Chargeable Demand	450 kW	
A37M	LV_{MS} 6.0⁺ GWh		
	Only available to a customer, other than an embedded network customer, taking supply from multiple supply points on a single site AND the aggregated annual consumption from those supply points is > 6.0 GWh*** <i>Peak: 7.00 AM to 11 PM "Mon - Fri" ; Off peak all other times</i>		
	- Standing charge	\$/customer pa	\$3,948.000
	- Peak Unit rate	¢/kWh	1.666
	- Off Peak Unit rate	¢/kWh	0.680
	- Demand rate	\$/kW pa	\$4.356
	Minimum Chargeable Demand	450 kW	
High Voltage Tariffs (nominal voltage ≥ 1000 Volts AND ≤ 22,000 Volts)			
A400	HV		
	Only available to customers consuming < 55 GWh pa <i>Peak: 7.00 AM to 11 PM "Mon - Fri" ; Off peak all other times.</i>		
	- Standing charge	\$/customer pa	\$6,936.000
	- Peak Unit rate	¢/kWh	1.799
	- Off Peak Unit rate	¢/kWh	0.573
	- Demand rate	\$/kW pa	\$5.148
	Minimum Chargeable Demand	1,000 kW	
A40E	HV_{EN} Annual Consumption ≤ 10 GWh		
	Only available to embedded network customers consuming ≤ 10 GWh pa <i>Peak: 7.00 AM to 11 PM "Mon - Fri" ; Off peak all other times</i>		
	- Standing charge	\$/customer pa	\$6,936.000
	- Peak Unit rate	¢/kWh	1.552
	- Off Peak Unit rate	¢/kWh	0.573
	- Demand rate	\$/kW pa	\$4.524
	Minimum Chargeable Demand	1,000 kW	

Customer Class Code	Tariff Name	Units	Rate
A40R	HV_{RF} (closed to new entrants)		
	<i>Peak: 7.00 AM to 11 PM "Mon - Fri" ; Off peak all other times.</i>		
	- Standing charge	\$/customer pa	\$6,936.000
	- Peak Unit rate	¢/kWh	1.799
	- Off Peak Unit rate	¢/kWh	0.573
	- Demand rate	\$/kW pa	\$3.928
	Minimum Chargeable Demand	1,000 kW	
A42E	HV_{EN} 10⁺ GWh		
	Only available to embedded network customers consuming > 10 GWh pa		
	<i>Peak: 7.00 AM to 11 PM "Mon - Fri" ; Off peak all other times</i>		
	- Standing charge	\$/customer pa	\$6,936.000
	- Peak Unit rate	¢/kWh	1.536
	- Off Peak Unit rate	¢/kWh	0.573
	- Demand rate	\$/kW pa	\$4.920
	Minimum Chargeable Demand	2,000 kW	
A480	HV - Annual Consumption ≥ 55 GWh		
	Only available to customers consuming ≥ 55 GWh pa		
	<i>Peak: 7.00 AM to 11 PM "Mon - Fri" ; Off peak all other times</i>		
	- Standing charge	\$/customer pa	\$7,956.000
	- Peak Unit rate	¢/kWh	1.723
	- Off Peak Unit rate	¢/kWh	0.573
	- Demand rate	\$/kW pa	\$3.804
	Minimum Chargeable Demand	10,000 kW	
Subtransmission Tariffs (nominal voltage > 22,000 Volts)			
A500	Subtransmission		
	<i>Peak: 7.00 AM to 11 PM "Mon - Fri" ; Off peak all other times</i>		
	- Standing charge	\$/customer pa	\$18,288.000
	- Peak Unit rate	¢/kWh	1.477
	- Off Peak Unit rate	¢/kWh	0.389
	- Demand rate	\$/kW pa	\$3.228
	Minimum Chargeable Demand	15,000 kW	
A50A	Subtransmission MA		
	<i>Peak: 7.00 AM to 11 PM "Mon - Fri" ; Off peak all other times</i>		
	- Standing charge	\$/customer pa	\$18,288.000
	- Peak Unit rate	¢/kWh	1.477
	- Off Peak Unit rate	¢/kWh	0.389
	- Demand rate	\$/kW pa	\$3.228
	Minimum Chargeable Demand	15,000 kW	

Customer Class Code	Tariff Name	Units	Rate
A50E	Subtransmission EG		
	Available to Embedded Generators connected to TTS-SSS-ST-EPG-TTS Loop.		
	<i>Peak: 7.00 AM to 11 PM "Mon - Fri" ; Off peak all other times</i>		
	- Standing charge	\$/customer pa	\$7,224.000
	- Peak Unit rate	¢/kWh	1.477
	- Off Peak Unit rate	¢/kWh	0.389
	- Demand rate	\$/kW pa	\$3.444
	Minimum Chargeable Demand	15,000 kW	

* A tariff code starting with the letter "F" indicates that the tariff attracts the feed in tariff rebate. Tariff reassignment requests to a tariff starting with the letter "F" can only be made by the customer's retailer.

** The installation of an embedded generation by an existing customer is considered a change in load characteristic and as such the A180 tariff is not supported. The metering and data recording for a co-generation site has additional regulated requirements to that of a standard site. It is not technically feasible to meet these requirements and at the same time be able to separately measure, control and bill a load controlled heating.

*** Other terms and conditions apply

The *Deemed Distribution Contract* and Jemena Electricity Networks' *Policy for Resetting Contract Demand* form part of the terms and conditions related to these prices. These documents can be viewed or downloaded from the following Website:

<http://www.jemena.com.au/operations/distribution/JEN/default.aspx>

APPENDIX 4 PFIT PASS THROUGH COSTS RATES (EXCLUSIVE OF GST)

The prices shown in this schedule are already incorporated into the Transmission Tariffs schedule shown in Appendix 3.

Customer Class Code	Tariff Name	Units	Rate
---------------------	-------------	-------	------

Residential

Only available to residential customers

A100	General Purpose		
	<i>Single rate all times</i>		
	- Standing charge	\$/customer pa	\$0.000
	- Unit rate	¢/kWh	0.024

A101 / F101*	Time of Use Interval Meter		
	<i>Available to customers with an interval meter</i>		
	<i>Peak: 7.00 AM to 11 PM "Mon - Fri" ; Off peak all other times</i>		
	- Standing charge	\$/customer pa	\$0.000
	- Peak Unit rate	¢/kWh	0.024
	- Off Peak Unit rate	¢/kWh	0.024

A140	Time of Use (closed to new entrants)		
	<i>This tariff is not available to existing customers that install an interval meter</i>		
	<i>Peak: 7.00 AM to 11 PM "Mon - Fri" ; Off peak all other times</i>		
	- Standing charge	\$/customer pa	\$0.000
	- Peak Unit rate	¢/kWh	0.024
	- Off Peak Unit rate	¢/kWh	0.024

A180	Off Peak Heating Only		
	<i>Available as a complementary tariff to the "Residential - General Purpose" A100 tariff only.</i>		
	<i>This tariff is not available to new or existing customers that install embedded generation**</i>		
	<i>11.00 PM to 7.00 AM all days</i>		
	- Standing charge	\$/customer pa	\$0.000
	- Off Peak Unit rate	¢/kWh	0.024

Small Business

Only available to customers:

- a) with annual consumption < 0.4 GWh AND maximum demand < 150 kVA (120 kW); and
- b) where supply is not taken from an on-site OR dedicated substation

A200	General Purpose		
	<i>Only available to customers with a single rate accumulation meter</i>		
	<i>Single rate all times</i>		
	- Standing charge	\$/customer pa	\$0.000
	- Unit rate	¢/kWh	0.024

Customer Class Code	Tariff Name	Units	Rate
A210 / F210* Time of Use Weekdays			
Only available to customers with a two rate accumulation meter OR to customers consuming < 160 MWh pa and having a maximum demand < 60 kW			
<i>Peak: 7.00 AM to 11 PM "Mon - Fri" ; Off peak all other times</i>			
	- Standing charge	\$/customer pa	\$0.000
	- Peak Unit rate	¢/kWh	0.024
	- Off Peak Unit rate	¢/kWh	0.023
A230 / F230* Time of Use Weekdays - Demand			
Only available to customers with a meter capable of measuring demand			
<i>Peak: 7.00 AM to 11 PM "Mon - Fri" ; Off peak all other times</i>			
	- Standing charge	\$/customer pa	\$0.000
	- Peak Unit rate	¢/kWh	0.024
	- Off Peak Unit rate	¢/kWh	0.023
	- Demand rate	\$/kW pa	\$0.000
	Minimum Chargeable Demand	60 kW	
A250 / F250* Time of Use Extended			
Only available to customers with a two rate accumulation meter OR to customers consuming < 160 MWh pa and having a maximum demand < 60 kW			
<i>Peak: 7.00 AM to 11 PM "Mon - Sun" ; Off peak all other times</i>			
	- Standing charge	\$/customer pa	\$0.000
	- Peak Unit rate	¢/kWh	0.024
	- Off Peak Unit rate	¢/kWh	0.023
A270 / F270* Time of Use Extended - Demand			
Only available to customers with a meter capable of measuring demand			
<i>Peak: 7.00 AM to 11 PM "Mon - Sun" ; Off peak all other times</i>			
	- Standing charge	\$/customer pa	\$0.000
	- Peak Unit rate	¢/kWh	0.024
	- Off Peak Unit rate	¢/kWh	0.023
	- Demand rate	\$/kW pa	\$0.000
	Minimum Chargeable Demand	60 kW	
A290 Unmetered Supply			
<i>Peak: 7.00 AM to 11 PM "Mon - Fri" ; Off peak all other times</i>			
	- Peak Unit rate	¢/kWh	0.024
	- Off Peak Unit rate	¢/kWh	0.023

Customer Class Code	Tariff Name	Units	Rate
---------------------	-------------	-------	------

Large Business

Low Voltage Tariffs (nominal voltage < 1000 Volts)

Only available to customers:

- a) with annual consumption ≥ 0.4 GWh OR maximum demand ≥ 150 kVA (120 kW); or
- b) taking supply from an on-site OR dedicated substation

A300 / F300* LV 0.4 - 0.8 GWh

Only available to customers consuming ≤ 0.8 GWh pa

Peak: 7.00 AM to 11 PM "Mon - Fri" ; Off peak all other times

- Standing charge	\$/customer pa	\$0.000
- Peak Unit rate	¢/kWh	0.024
- Off Peak Unit rate	¢/kWh	0.022
- Demand rate	\$/kW pa	\$0.000
Minimum Chargeable Demand	120 kW	

A30E LV_{EN} Annual Consumption ≤ 0.8 GWh

Only available to embedded network customers consuming ≤ 0.8 GWh pa

Peak: 7.00 AM to 11 PM "Mon - Fri" ; Off peak all other times

- Standing charge	\$/customer pa	\$0.000
- Peak Unit rate	¢/kWh	0.024
- Off Peak Unit rate	¢/kWh	0.022
- Demand rate	\$/kW pa	\$0.000
Minimum Chargeable Demand	120 kW	

A320 LV 0.8⁺ - 2.2 GWh

Only available to customers consuming > 0.8 GWh pa BUT ≤ 2.2 GWh pa

Peak: 7.00 AM to 11 PM "Mon - Fri" ; Off peak all other times

- Standing charge	\$/customer pa	\$0.000
- Peak Unit rate	¢/kWh	0.024
- Off Peak Unit rate	¢/kWh	0.022
- Demand rate	\$/kW pa	\$0.000
Minimum Chargeable Demand	250 kW	

A32E LV_{EN} 0.8⁺ - 2.2 GWh

Only available to customers consuming > 0.8 GWh pa BUT ≤ 2.2 GWh pa

Peak: 7.00 AM to 11 PM "Mon - Fri" ; Off peak all other times

- Standing charge	\$/customer pa	\$0.000
- Peak Unit rate	¢/kWh	0.024
- Off Peak Unit rate	¢/kWh	0.022
- Demand rate	\$/kW pa	\$0.000
Minimum Chargeable Demand	250 kW	

Customer Class Code	Tariff Name	Units	Rate
A340	LV 2.2⁺ - 6.0 GWh		
Only available to customers consuming > 2.2 GWh pa BUT ≤ 6.0 GWh pa			
<i>Peak: 7.00 AM to 11 PM "Mon - Fri" ; Off peak all other times</i>			
	- Standing charge	\$/customer pa	\$0.000
	- Peak Unit rate	¢/kWh	0.024
	- Off Peak Unit rate	¢/kWh	0.022
	- Demand rate	\$/kW pa	\$0.000
	Minimum Chargeable Demand	250 kW	
A34E	LV_{EN} 2.2⁺ - 6.0 GWh		
Only available to customers consuming > 2.2 GWh pa BUT ≤ 6.0 GWh pa			
<i>Peak: 7.00 AM to 11 PM "Mon - Fri" ; Off peak all other times</i>			
	- Standing charge	\$/customer pa	\$0.000
	- Peak Unit rate	¢/kWh	0.024
	- Off Peak Unit rate	¢/kWh	0.022
	- Demand rate	\$/kW pa	\$0.000
	Minimum Chargeable Demand	250 kW	
A34M	LV_{MS} 2.2⁺ - 6.0 GWh		
Only available to a customer, other than an embedded network customer, taking supply from multiple supply points on a single site AND the aggregated annual consumption from those supply points is > 2.2 GWh BUT ≤ 6.0 GWh***			
<i>Peak: 7.00 AM to 11 PM "Mon - Fri" ; Off peak all other times</i>			
	- Standing charge	\$/customer pa	\$0.000
	- Peak Unit rate	¢/kWh	0.024
	- Off Peak Unit rate	¢/kWh	0.022
	- Demand rate	\$/kW pa	\$0.000
	Minimum Chargeable Demand	250 kW	
A370	LV 6.0⁺ GWh		
Only available to customers consuming > 6.0 GWh pa			
<i>Peak: 7.00 AM to 11 PM "Mon - Fri" ; Off peak all other times</i>			
	- Standing charge	\$/customer pa	\$0.000
	- Peak Unit rate	¢/kWh	0.024
	- Off Peak Unit rate	¢/kWh	0.022
	- Demand rate	\$/kW pa	\$0.000
	Minimum Chargeable Demand	450 kW	

Customer Class Code	Tariff Name	Units	Rate
A37E	LV_{EN} 6.0⁺ GWh		
	Only available to embedded network customers consuming > 6.0 GWh pa <i>Peak: 7.00 AM to 11 PM "Mon - Fri" ; Off peak all other times</i>		
	- Standing charge	\$/customer pa	\$0.000
	- Peak Unit rate	¢/kWh	0.024
	- Off Peak Unit rate	¢/kWh	0.022
	- Demand rate	\$/kW pa	\$0.000
	Minimum Chargeable Demand	450 kW	
A37M	LV_{MS} 6.0⁺ GWh		
	Only available to a customer, other than an embedded network customer, taking supply from multiple supply points on a single site AND the aggregated annual consumption from those supply points is > 6.0 GWh*** <i>Peak: 7.00 AM to 11 PM "Mon - Fri" ; Off peak all other times</i>		
	- Standing charge	\$/customer pa	\$0.000
	- Peak Unit rate	¢/kWh	0.024
	- Off Peak Unit rate	¢/kWh	0.022
	- Demand rate	\$/kW pa	\$0.000
	Minimum Chargeable Demand	450 kW	
High Voltage Tariffs (nominal voltage ≥ 1000 Volts AND ≤ 22,000 Volts)			
A400	HV		
	Only available to customers consuming < 55 GWh pa <i>Peak: 7.00 AM to 11 PM "Mon - Fri" ; Off peak all other times.</i>		
	- Standing charge	\$/customer pa	\$0.000
	- Peak Unit rate	¢/kWh	0.024
	- Off Peak Unit rate	¢/kWh	0.022
	- Demand rate	\$/kW pa	\$0.000
	Minimum Chargeable Demand	1,000 kW	
A40E	HV_{EN} Annual Consumption ≤ 10 GWh		
	Only available to embedded network customers consuming ≤ 10 GWh pa <i>Peak: 7.00 AM to 11 PM "Mon - Fri" ; Off peak all other times</i>		
	- Standing charge	\$/customer pa	\$0.000
	- Peak Unit rate	¢/kWh	0.024
	- Off Peak Unit rate	¢/kWh	0.022
	- Demand rate	\$/kW pa	\$0.000
	Minimum Chargeable Demand	1,000 kW	

Customer Class Code	Tariff Name	Units	Rate
A40R	HV_{RF} (closed to new entrants)		
	<i>Peak: 7.00 AM to 11 PM "Mon - Fri" ; Off peak all other times.</i>		
	- Standing charge	\$/customer pa	\$0.000
	- Peak Unit rate	¢/kWh	0.024
	- Off Peak Unit rate	¢/kWh	0.022
	- Demand rate	\$/kW pa	\$0.000
	Minimum Chargeable Demand	1,000 kW	
A42E	HV_{EN} 10⁺ GWh		
	Only available to embedded network customers consuming > 10 GWh pa		
	<i>Peak: 7.00 AM to 11 PM "Mon - Fri" ; Off peak all other times</i>		
	- Standing charge	\$/customer pa	\$0.000
	- Peak Unit rate	¢/kWh	0.024
	- Off Peak Unit rate	¢/kWh	0.022
	- Demand rate	\$/kW pa	\$0.000
	Minimum Chargeable Demand	2,000 kW	
A480	HV - Annual Consumption ≥ 55 GWh		
	Only available to customers consuming ≥ 55 GWh pa		
	<i>Peak: 7.00 AM to 11 PM "Mon - Fri" ; Off peak all other times</i>		
	- Standing charge	\$/customer pa	\$0.000
	- Peak Unit rate	¢/kWh	0.024
	- Off Peak Unit rate	¢/kWh	0.022
	- Demand rate	\$/kW pa	\$0.000
	Minimum Chargeable Demand	10,000 kW	
Subtransmission Tariffs (nominal voltage > 22,000 Volts)			
A500	Subtransmission		
	<i>Peak: 7.00 AM to 11 PM "Mon - Fri" ; Off peak all other times</i>		
	- Standing charge	\$/customer pa	\$0.000
	- Peak Unit rate	¢/kWh	0.024
	- Off Peak Unit rate	¢/kWh	0.022
	- Demand rate	\$/kW pa	\$0.000
	Minimum Chargeable Demand	15,000 kW	
A50A	Subtransmission MA		
	<i>Peak: 7.00 AM to 11 PM "Mon - Fri" ; Off peak all other times</i>		
	- Standing charge	\$/customer pa	\$0.000
	- Peak Unit rate	¢/kWh	0.024
	- Off Peak Unit rate	¢/kWh	0.022
	- Demand rate	\$/kW pa	\$0.000
	Minimum Chargeable Demand	15,000 kW	

Customer Class Code	Tariff Name	Units	Rate
A50E	Subtransmission EG		
	Available to Embedded Generators connected to TTS-SSS-ST-EPG-TTS Loop.		
	<i>Peak: 7.00 AM to 11 PM "Mon - Fri" ; Off peak all other times</i>		
	- Standing charge	\$/customer pa	\$0.000
	- Peak Unit rate	¢/kWh	0.024
	- Off Peak Unit rate	¢/kWh	0.022
	- Demand rate	\$/kW pa	\$0.000
	Minimum Chargeable Demand	15,000 kW	

* A tariff code starting with the letter "F" indicates that the tariff attracts the feed in tariff rebate. Tariff reassignment requests to a tariff starting with the letter "F" can only be made by the customer's retailer.

** The installation of an embedded generation by an existing customer is considered a change in load characteristic and as such the A180 tariff is not supported. The metering and data recording for a co-generation site has additional regulated requirements to that of a standard site. It is not technically feasible to meet these requirements and at the same time be able to separately measure, control and bill a load controlled heating.

*** Other terms and conditions apply

The *Deemed Distribution Contract* and Jemena Electricity Networks' *Policy for Resetting Contract Demand* form part of the terms and conditions related to these prices. These documents can be viewed or downloaded from the following Website:

<http://www.jemena.com.au/operations/distribution/JEN/default.aspx>

APPENDIX 5 EXCLUDED SERVICE CHARGES

JEN holds a licence to distribute energy in the northern and western suburbs of Melbourne. Jemena Electricity Networks (Vic) Ltd is a wholly owned subsidiary of Jemena. Jemena personnel will deliver the prescribed and excluded services described in this document. These terms, conditions and charges are only applicable to the services delivered on the JEN network.

Introduction

This document sets out the Excluded Service Charges, Prescribed Service Charges, Terms and Conditions that apply for the JEN network.

A distributor is required to offer to provide excluded services for a charge and on terms and conditions that are fair and reasonable. The Essential Services AER regulates the maximum charge for such services. However, customers may negotiate an alternate charge for an alternate level of service and for some services, there may be alternative service providers.

The service charges set out in this document are the commonly requested services. Other services are carried out as Recoverable Works. Recoverable Works are undertaken at hourly rates plus the cost of materials and any sub-contracted services (such as traffic control).

The charges in this Appendix include GST unless otherwise specified.

Requests for Service

Customers generally request services through their retailer. Retailers are invoiced for these services on a monthly basis through the established billing processes. Where a customer requests a service either directly or through a Registered Electrical Contractor, payment is required before the service is performed.

Hours of Operation

Most services are offered during both business hours and after business hours. These hours are defined as:

Business Hours	0830 - 1730
After Hours	1730 - 0830

Connection

These services apply to customers requesting connection to the existing electricity distribution network¹⁸. The services are offered to customers requiring either a permanent

¹⁸ Where the electricity network must be extended or augmented before the customer can be connected additional charges apply. Refer to the Customer Connection Policy.

or temporary connection to the network via either an overhead or underground connection.

The price for each of the services includes all reasonable material, transport, equipment and labour to connect the installation, but excludes an inspection of the electrical installation¹⁹.

Additional charges are applicable in circumstances where the connection works are delayed or cannot be completed due to problems such as:

- Access to the site is constrained
- Delays of more than 15 minutes caused by the customer or electrical contractor
- Debris over pit
- The installation does not comply with electrical or connection requirements
- The Electrical Work Request does not correctly specify all the work required
- Power Industry Lock not installed

Connection Services include the installation of a meter but the charges do not include the cost of the meter.

New premises

This charge applies where a customer, or a retailer on behalf of a customer, makes arrangements for a new supply connection at a specified address. The service charge is dependent on the type of installation.

Connection of new premises	Business Hours	After Hours
Residential single phase (no off-peak supply)	\$205.20	\$433.40
Residential single phase, off-peak meter	\$274.50	\$502.70
Residential 3 phase, direct connected meter	\$307.50	\$535.70
Residential where JEN is not the Responsible Person ²⁰	\$142.50	\$370.70
Non-residential single phase (no off-peak supply)	\$319.30	\$592.60
Non-residential single phase, off peak meter	\$388.60	\$661.90
Non-residential 3 phase, direct connected meter	\$421.60	\$694.90
Non-residential CT meter	\$784.60	\$1057.90
Non-residential where JEN is not the Responsible Person	\$256.60	\$529.90

Temporary Supply

A temporary supply is provided where supply is requested for a known limited period – generally in the order of a few weeks – but may extend for up to 5 years. Temporary supplies may be provided for such purposes as:

- Construction of buildings, roads etc

¹⁹ Electrical inspection services are unregulated.

²⁰ Where JEN is not the Responsible Person (as defined in the National Electricity Code) the customer's Retailer is generally responsible for the meter and meter installation.

- Supply to career, recruiting, health service, mobile X-Ray/dental/mobile library vans
- Carnivals, fetes, shows
- Camps

The charge for a temporary supply covers overhead or underground, single-phase or multi-phase supply.

Temporary supply	Business Hours	After Hours
Overhead supply – Coincident abolishment	\$204.10	\$396.00
Partial Supply in Permanent Position	\$222.70	\$425.70

A direct metered temporary supply is provided subject to the following:

- Sufficient supply capacity is available at the pillar, pit or distribution pole and within servicing distance of the desired location; and
- A completed and signed Electrical Work Request, together with the appropriate paperwork (a retailer request and a Certificate of Electrical Safety (CES)) from the Registered Electrical Contractor, is lodged.

All temporary supplies must be metered, except where specific approval has been given.

Temporary supplies attract a Temporary Supply charge *plus* the appropriate standard tariff charges based on energy consumption, including a supply charge.

The charge for temporary supplies is applicable to temporary installations not exceeding 100 amps. Larger temporary supplies may be arranged by negotiation at recoverable works rates.

These charges also apply where a customer, or a representative of customer (eg a builder), wishes to provide permanent or temporary supply to a new property under construction.

Coincident abolishment means that the cost of removing the temporary supply is included in the charge. The temporary supply will be abolished at the same time that the permanent service is established. If the customer requires the temporary supply to be removed before or after the permanent service is established an additional charge at the standard rate for a Service Vehicle is applied.

Field Officer Visit

Field Officers perform the following services:

- Collection of overdue accounts
- Re-energisation after de-energisation for non-payment
- Time switch adjustment
- Fuse removal/insertion at the request of electrical contractor
- Special meter reading, fuse insertion, fuse removal

Re-energisation after De-energisation for Non-Payment

This charge applies where a supply point is re-energised after a customer has been de-energised for non-payment. This charge assumes that all supply assets remain at the customer's installation when the supply point is de-energised. Re-energisation requests received prior to 3pm will incur normal hours fee and after hours fee applies to requests received after 3pm and before 9pm.

Other charges may apply if additional work is required or site problems exist eg. Access and safety and include wasted truck visit.

Adjust time switch

This charge applies when a customer or a customer's retailer requests that the hours of application of different meter registers (for example, off peak) be changed. In the case of a request to apply Daylight Saving hours, two charges apply to cover the costs of two visits, one at the commencement of Daylight Saving and one at the finish.

Fuse removal/insertion at request of Electrical Contractor

This charge applies where the electrical contractor requires the site to be de-energised or re-energised. The charge applies for each visit to site where the visit lasts no more than 15 minutes. The service is only available for installations with fuses rated at less than 100 amps.

Special Meter Reading, Fuse Insertion, Fuse Removal

This charge applies for the services provided by a Special Meter Reader. This includes meter reading, fuse insertion and fuse removal.

These services may be required in situations such as:

- A meter reading is required for the purpose of rendering an interim bill
- A customer has requested a meter reading following a bill based on an estimated reading
- A new customer has moved in to vacant premises
- A customer has vacated premises and the Retailer requests de-energisation of supply.

Field Officer Visits	Business Hours	After Hours
Re-energisation after de-energisation for non-payment	\$53.70 ²¹	\$164.60 ²²
Adjust time switch	\$30.70	NA
Fuse removal/insertion at request of electrical contractor	\$30.70	\$133.80
Special read, fuse removal, fuse insertion	\$23.00	\$133.80

Generally re-energisation services are provided on the date requested by the retailer where the requested date of re-energisation is at least one day after the day the request is submitted. Where the retailer requests same day re-energisation and the request is received before 3.00pm the After Hours charge is applied. Where the request is made after 3.00pm there are two possible service charges. Where a Field Officer is available to

²¹ Only applies where the request is received before 3.00pm

²² Only applies where the request is received between 3.00pm and 9.00pm.

action the request that day then the standard After Hours charge will apply. Where it is necessary to send a Service Vehicle to provide the re-energisation service a Service Vehicle Visit After Hours charge will be applied. The retailer will be advised at the time of the request which charge applies.

All re-energisation requests are undertaken on a best endeavours basis in accordance with the Electricity Distribution Code.

The special read charge applies in the following situations:

- a request is made to verify meter reading due to an account complaint and the original meter reading is found to be correct
- A separate charge applies to each separate installation within a multiple installation such as farms, villa units or combined commercial/residential establishment
- The charge is applied for each visit to site by a Field Officer. If the service cannot be performed due to difficulties such as locked gates or the customer is not at home then an additional charge is applied for each additional visit.

Service Truck or Van Visit

Service trucks or vans undertake a range of services such as electrical isolation of premises. The charge applies to all requests for services provided by service trucks and vans except where the service provided has a specific charge detailed in this document.

Field Truck or Van Visits	Business Hours	After Hours
Service Truck/Van visit	\$196.40	\$246.90

The charge applies for any task up to one-hour duration. Tasks that exceed one hour will be charged additional hours at the same rate.

These charges apply to all customer and contractor requested work involving a service vehicle except emergency and fault calls where the customer is clearly not at fault. Failure to check that the Main or Safety switch is turned ON – after being so advised – would attract a charge.

A service vehicle visit charge is also applied where:

- Scheduled work cannot be performed due to non-compliance of the customers installation such as an electrical defect or the site cannot be accessed
- On arrival, it is found that the scheduled work, or attendance, is not required
- A scheduled visit is cancelled within 24 hours of the scheduled time

Elective Underground Services

This charge applies to situations where a customer with an existing overhead service requests an underground service.

The distributor provides the electrical connection from the pole or underground mains to the pit located on the boundary. These works are undertaken as Recoverable Works and a quotation will be supplied for these works upon application.

The underground connection between the pit located on the boundary and the service fuse/meter panel located on the customer premises are the responsibility of the customer.

Elective Underground Service	Business Hours	After Hours
Elective underground service installation	RW	RW

Covering Low Voltage Mains

These charges apply where a builder or, other applicant, requests the power lines close to a site be covered to prevent electrocution during construction or other activities. There are two categories for this charge depending on the type of line being covered: street mains (two wires or all wire) and service cable. There are two components to each charge: a fixed charge for installation and removal of the temporary cover, and a variable charge for rental of the covers.

The charge includes the installation and removal of the covers and the first month's rental charge

Payment is required in advance for cover charges and rental is applied to the retailer/customer account.

Covering Low Voltage Mains	Business Hours	After Hours
Cover service cable	\$365.40	NA
Second and subsequent months rental of covers – service wire	\$65.80	
Cover low voltage mains – 2 wire	\$727.60	\$878.00
Second and subsequent month rental of covers – 2 wire	\$52.60	NA
Cover low voltage mains – all wires	\$740.80	\$891.00
Second and subsequent month rental of covers – all wires	\$65.80	NA

These charges do not apply to high voltage mains. High voltage mains are switched out of service when work is required in close proximity to the mains.

Service Cable pulled down by High Loads

The charge applies where a high load pulls down an overhead service cable. The charge is calculated for each instance based on the actual cost of the repairs.

Low Voltage Meter Conversion

These charges apply where a customer or retailer requests a change of metering so that the customer can take advantage of a different tariff.

Meter Conversion	Business Hours	After Hours
Conversion to Time of Use tariff	\$440.00	\$601.40
Installation of 5 day electronic time switch	\$299.60	\$400.40

Meter Test

This charge applies where a customer or retailer requests an investigation of the meter installation or meter accuracy. The charge depends upon the type and number of meters requiring test.

Meter Equipment Test	Business Hours	After Hours
Single phase meter test – first meter	\$178.80	\$229.30
Single phase meter test – second and subsequent meters	\$66.90	\$85.60
Multi phase meter test – first meter	\$268.80	\$343.50
Multi phase meter test – second and subsequent meters	\$113.00	\$145.90

This charge is refunded where JEN is responsible for the meter and the meter is found to be outside prescribed accuracy limits.

Meter or Connection Fraud Investigation

This charge applies where a retailer or other party requests an investigation of the meter installation and suspects that fraud or meter tampering has taken place.

Meter or Connection Fraud Investigation	Business Hours	After Hours
Fraud investigation	\$144.80	NA

Switching Service

This charge applies where a customer, retailer or contractor requires high or low voltage switching. Generally this service is required when a customer requires a section of line to be switched out so that work can be safely undertaken on a building or a crane can lift near power lines.

Switching Service	Business Hours	After Hours
Switching service	\$223.80	\$286.40

The charge covers the cost of modifying the metering equipment to provide time switched contacts. This work is undertaken in conjunction with other metering work.

Where the switching service is provided without other metering work being undertaken then a Service Vehicle Visit fee is also charged.

Electrical Services

This charge applies where a consultant or customer requests an on-site visit from an electrical compliance officer to discuss issues related to electrical compliance of the installation.

Electrical Inspection	Business Hours	After Hours
Electrical inspection service	\$167.90	\$219.50

Miscellaneous Services

These charges apply where a customer, contractor or retailer has made arrangements to pay by cheque or direct debit and the cheque or direct debit is dishonoured.

Miscellaneous Services	Business Hours	After Hours
Dishonoured cheque fee	\$17.50	NA
Dishonoured direct debit fee	\$8.70	NA

Meter Provision – Excluded Service

Excluded metering charges only apply to a small number of customers who consume more than 160MWh of energy per year AND have a manually read meter. Most customers that consume more than 160MWh per year have remotely read meters and the provision of services to these customers is contestable and does not have a regulated charge.

Meter Provision Charges (Customers consuming >160MWh per year)	Business Hours	After Hours
3 phase direct connected meter provision – manually read	\$162.29	NA
3 phase direct connected meter provision – manually read	\$282.21	NA

Public Lighting

The public lighting excluded service charges apply to public lighting services provided for the purpose of lighting public places, and include the following services in accordance with the Public Lighting Code:

- The operation of public lighting assets, including handling enquiries and complaints about public lighting, and dispatching crews to repair public lighting assets; and
- The maintenance, repair and replacement of public lighting assets.

The charges apply to lights with standard or non-standard fittings.

The proposed charges for 2010 are shown in the table below. The charges once approved by the AER, will be published on the following website:

<http://www.jemena.com.au/operations/distribution/JEN/>

Light Type	Annual Charge
Fluorescent 20 watt	\$44.03
Fluorescent 40 watt	\$44.03
Mercury Vapour 50 watt	\$44.03
Mercury Vapour 80 watt	\$35.22
Mercury Vapour 125 watt	\$51.78
Mercury Vapour 250 watt	\$67.76
Mercury Vapour 400 watt	\$76.23

Sodium High Pressure 50 watt	\$85.21
Sodium Low Pressure 90 watt	\$72.26
Sodium High Pressure 100 watt	\$93.39
Sodium High Pressure 150 watt	\$68.17
Sodium High Pressure 250 watt	\$70.59
Sodium High Pressure 250 watt (24 hrs)	\$110.12
Sodium High Pressure 400 watt	\$93.89
55W Induction	\$44.03
Metal Halide 70 watt	\$90.52
Metal Halide 100 watt	\$151.33
Metal Halide 150 watt	\$151.33
Metal Halide 250 watt	\$151.77
Incandescent 100 watt	\$54.95
Incandescent 150 watt	\$68.68
2x14W T5 light	\$28.68

In addition to the charges detailed above there is a metering data service charge applicable to unmetered supplies. The proposed amount for 2010 is \$ 0.129 / light pa. (Exclusive of GST)