


Retrofit SiriusXM Satellite in Your Cybertruck

Wish your Cybertruck had true SiriusXM satellite radio? This DIY guide shows how to retrofit Tesla OEM components for full satellite support - no cell towers needed. Includes a detailed parts list, installation steps, and troubleshooting notes.

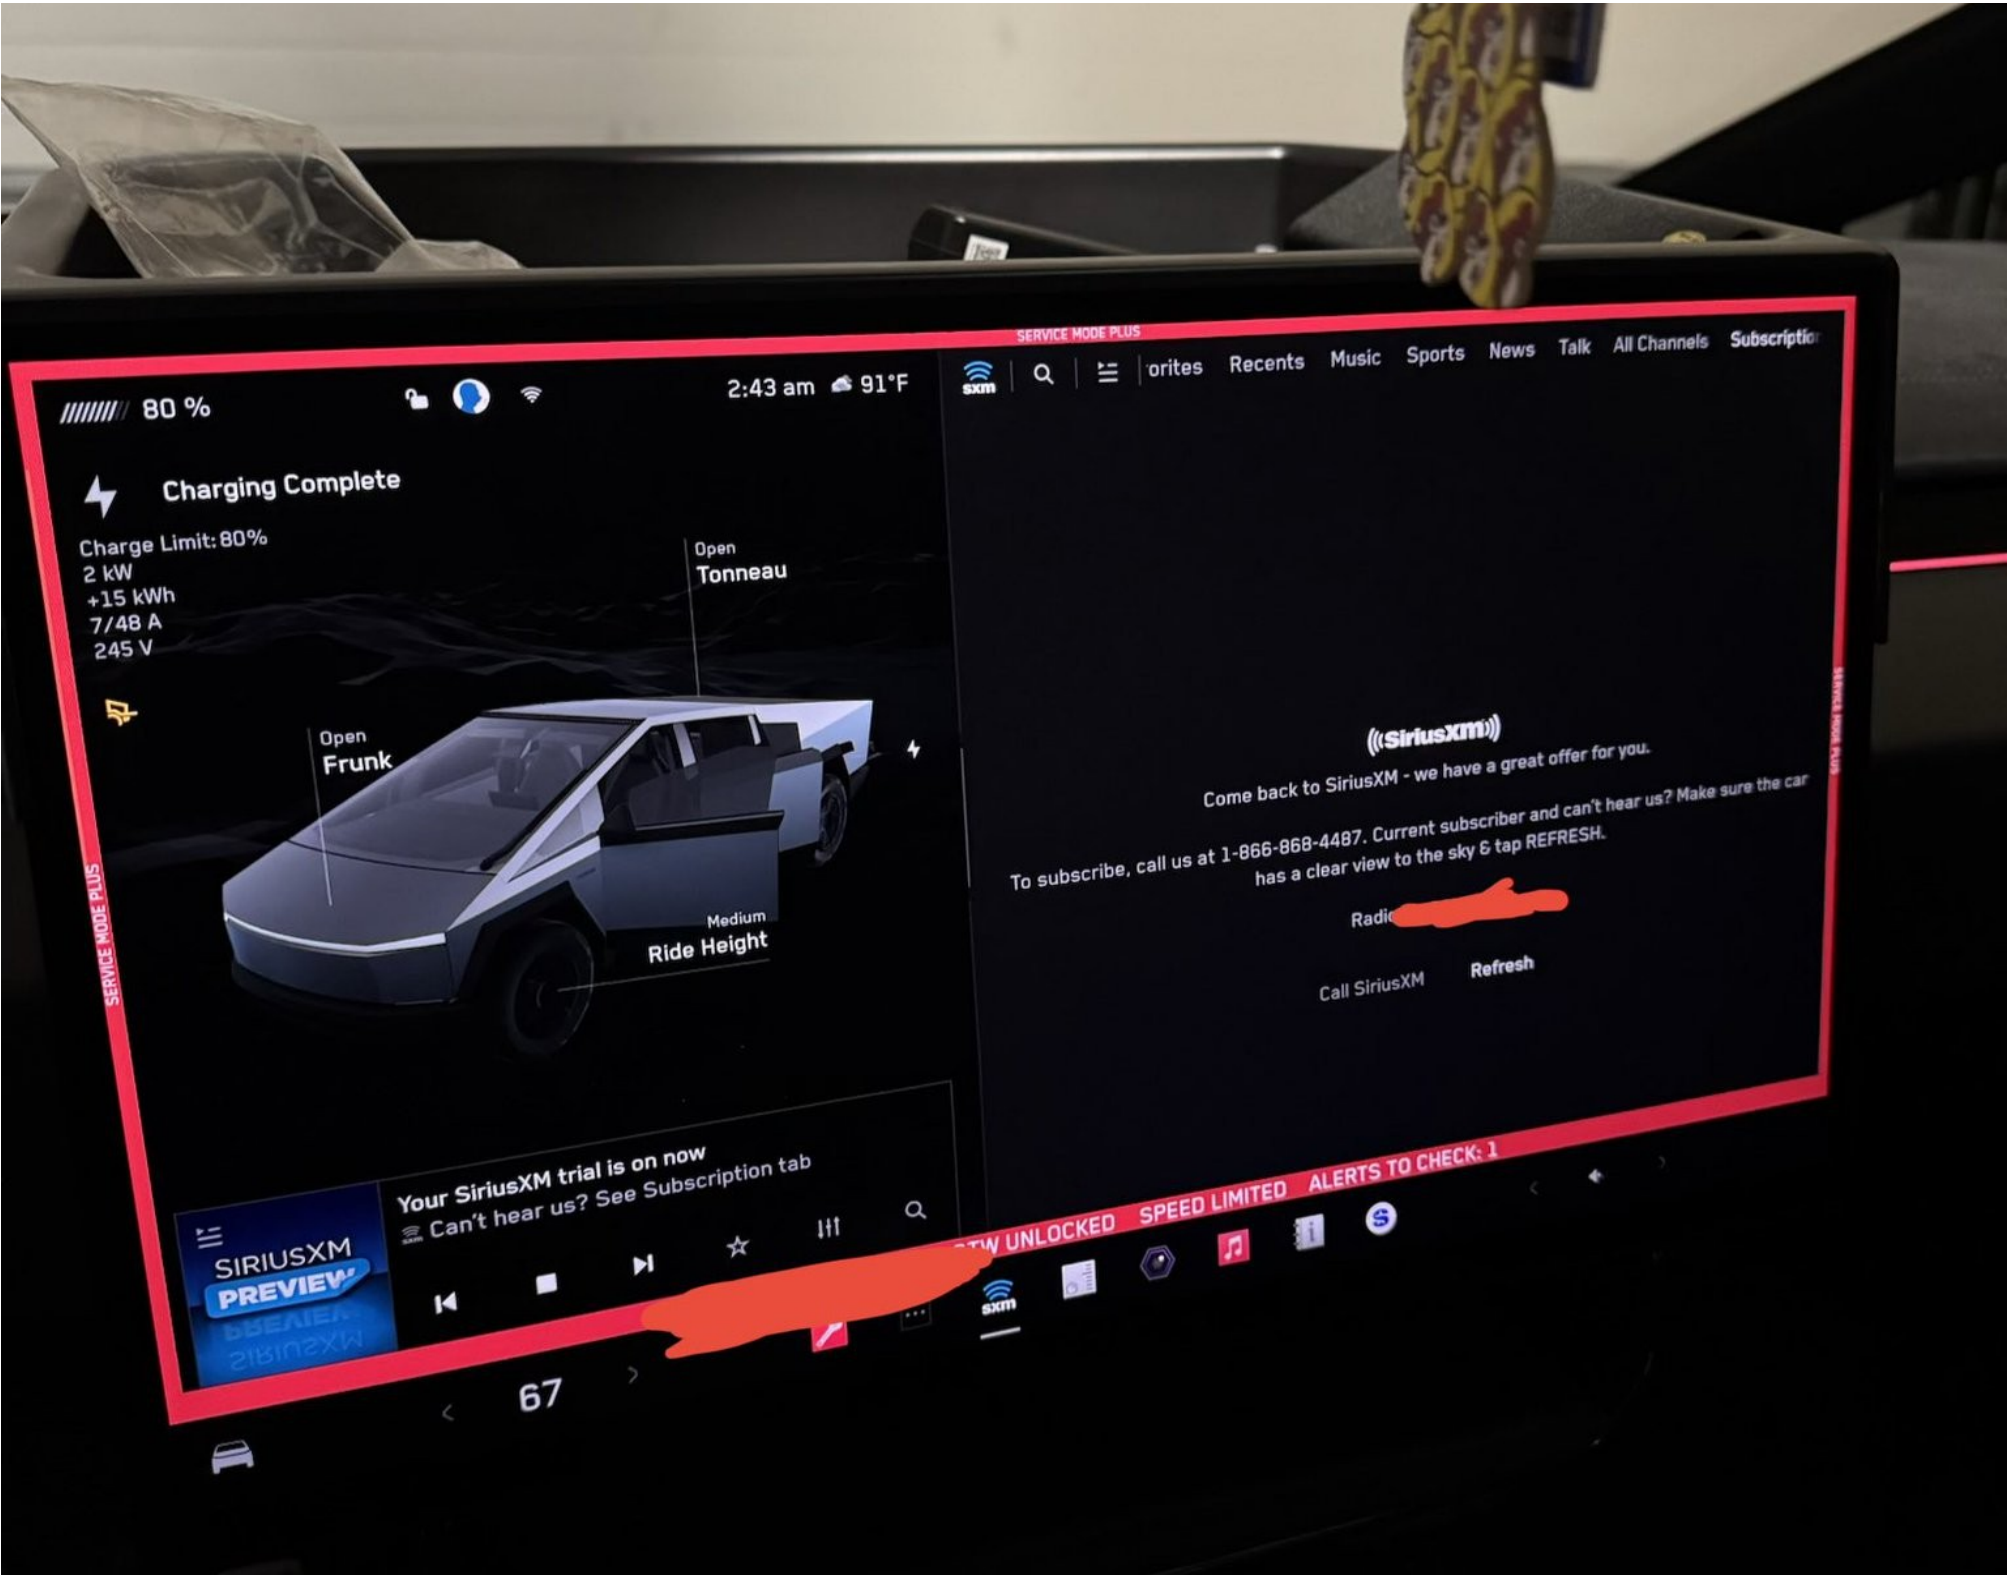

Pictured: SiriusXM Satellite App successfully playing the Preview channel

When I got my Cybertruck, one feature I was bummed about not having was SiriusXM. When you're out in the middle of nowhere with no cell service, it's a little nice to have live music and news. Eventually Tesla/SXM announced that SiriusXM compatibility was coming to the 3/Y/CT lineup powered by "different technology" than app-only streaming.

Will My Streaming Only Plan Work Inside My Tesla? ^

Your Tesla has a unique radio ID. There's no need, nor capability, to log in to inside your car.

All vehicles require their own subscription.


Included with the Model 3, Y and Cybertruck Tesla 2024 Holiday software update, SiriusXM can now be accessed directly through head-unit in your vehicle. This is a different technology than our app-only service where you log in to the mobile app. This new service gives you the best experience in your vehicle plus a new streaming login for the SiriusXM. Your existing streaming credentials cannot be used with this service.

Model S and Model X (if equipped) are equipped with SiriusXM satellite radio and do not utilize our streaming connection.

In-car login is not available in Tesla Vehicles.


A screenshot from a now removed dropdown on the SiriusXM Tesla FAQ page

Once this eventually released with the 2024 Holiday update, it was disappointing to see that the "different technology" was a virtual radio ID that only complicated the registration process for SiriusXM. The main drawback with cellular streaming is that it's as useful as all the other streaming apps on the truck. Why would someone willingly pay for SiriusXM curated stations when Spotify and Apple Music have all the new releases and countless radio stations.

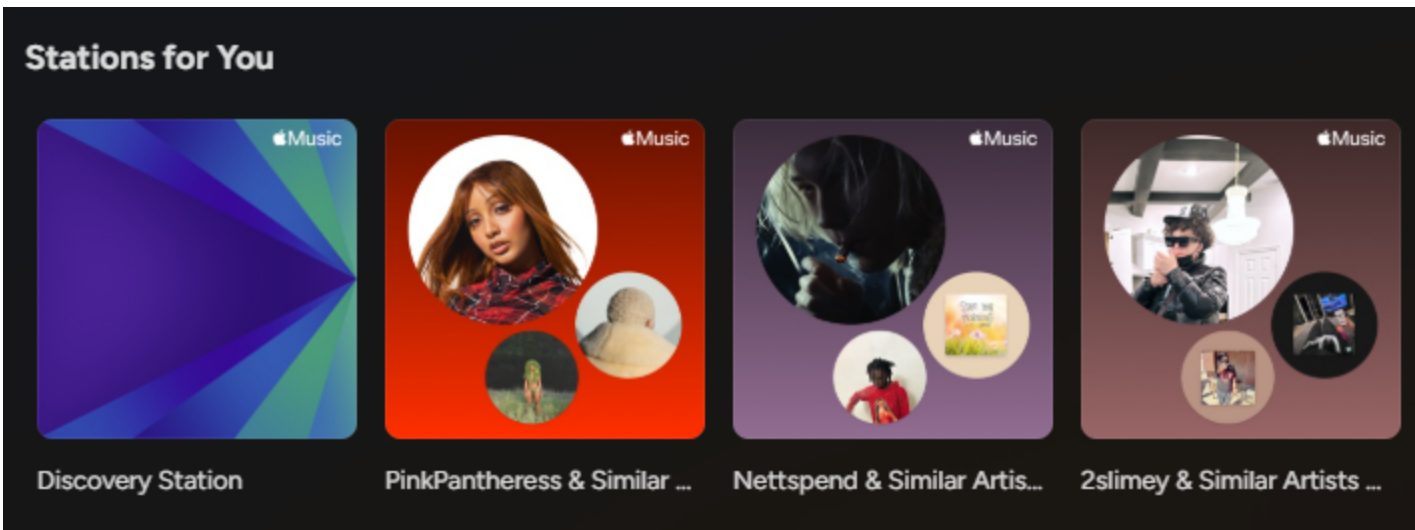

Apple Music's Custom Stations

Over the years, I've seen multiple TMC members retrofit their 3/Y with a SiriusXM tuner successfully. It's a little confusing to grab information from a forum thread so I was very fortunate to find [someone documenting the process on their personal blog](#). From this and a long forum scrubbing session I was able to write up a proof-of-concept for me to follow. I actually enjoyed doing this mod, I learned how to use the expansive service documentation provided by Tesla and found out how the car communicates. I also built up the courage to start cold-calling (or in this case, cold-DMing) people for help with this and discovered more things about my truck.

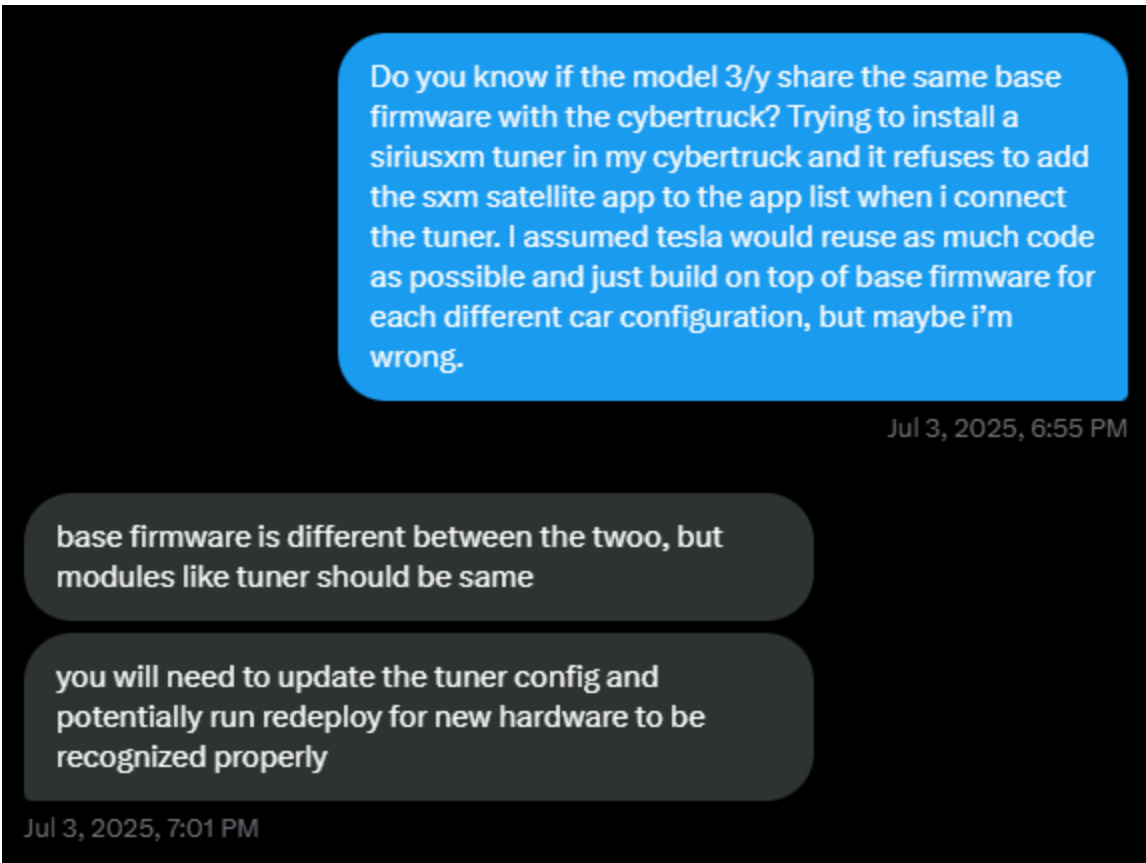

My Discussion with a Famous Tesla Hacker on X

Needed Parts:

PART	PRICE	LINK
Tuner w/ XM Support	\$225 SC or \$180 3rd Party	1143711-00-C
Fakra Curry Female to SMB Male	\$8.06	https://www.amazon.com
SiriusXM NGVA3 Antenna	\$16.73	https://www.amazon.com
Toolbox 3/Service Mode Plus	\$75 (one day)	Tesla EPC Catalog
OBD2 to RJ45 Cable	\$14.79	https://www.amazon.com
Torx and Flange Head Screwdriver	Realisically, you should already have this	

If you want to keep FM working, you'll have to buy a few more parts.

PART	PRICE	LINK
FM Antenna Amplifier	\$110 SC or \$55 3rd Party	1551330-00-B
Dual Fakra to Two Single Fakra Wire	\$12.73	https://www.amazon.com/dp/B07Q6
Female to Female Fakra Z Wire	\$6.49	https://www.amazon.com/gp/produ

You don't need to use these exact parts, but if you do find other parts that work please leave them in the replies with their pricing! When ordering from the Service Center, some people have complained about Tesla restricting the parts you can order based on the model you create the ticket for. I made a ticket for my Model S and was able to order both the tuner (Model S) and the amplifier (Cybertruck) in the same ticket. If you want to order parts from the Service Center, you'll need to create a service ticket and select other as the reason. Make sure to specify that no labor is required, they'll order the part and eventually let you pick it up from the Service Center. The total

for this whole operation should come out to around \$468.80 and 30 minutes of your day. If you want to save a few bucks, you can try asking the service center to change your gateway configuration for you. I find it very infuriating to communicate with Tesla service, if you value your time (and want to play around with Tesla Toolbox) the \$75 is probably worth it.

Current Issues:

- Refreshing takes a couple of tries using both the Tesla UI and SXM website.
- Interference is a big issue if you're mounting the antenna inside, trees will mess up your signal.
- The truck won't instantly pickup the new tuner after restarting it.
- The SXM tuner is too large for the housing on the front headliner, you'll be able to fit it but it won't be screwed in. You also will not be able to completely fasten the trim with the new tuner installed. I am currently working on my own mount for the tuner. It will take a while but I will update the site when it's released.
- The tuner gets really hot sometimes, I don't know if this is normal or unique for me.

Install Guide:

💡 *All links provided for each step are made to assist you with pictures/videos. They may or may not be specific to this install but should still be helpful as a reference point (for example, step 2 has a video showing how to install starlights, obviously you're not installing starlights but it should be helpful to see how it looks to remove the front headliner). The tuner that came with the Cybertruck will be referred to as the FM tuner and the replacement tuner will be referred to as the SXM tuner. The SXM tuner is fully capable of playing FM.*

1. Setup the prerequisites

Connect all the parts together right now to make later steps easier. Connect the SMB to Fakra bridge to the SXM antenna and connect the female-to-female Fakra connector to the splitter and the amplifier. You can connect those parts to the SXM tuner now if you want, I personally waited until the tuner was working before connecting this "harness". I've linked a wiring diagram to make it a little easier to see what goes where, ignore the jumper wires. This diagram could be useful if you're confused by later steps relating to connecting the wires, feel free to refer to it later.



2. Remove the front headliner trim

The trim is secured by a magnet and a bunch of clips. The easiest way to remove it is to grab from the windshield side on the left as there's an indent made to stick your fingers in it, from there slide your hand closer to the door and pull. If any of the clips lose a white piece, they clip right back on. You don't need to remove the full trim if you want to make reinstallation a lot easier for yourself. The tuner should be located on the driver side.

 <https://service.tesla.com/docs/Cybertruck/ServiceManual/en-us/GUID-98CEF5F5-26A4-41CA-8E5F-3011E9644607.html>
<https://www.youtube.com/watch?v=ngCuRiDx65c>

3. Disconnect the FM tuner

I'd suggest disconnecting the ethernet plug and seeing if the XM tuner works, there should be an orange light coming from the XM tuner once plugged in. Be careful as the new tuner can get really hot. To disconnect the ethernet plug, there's a little tab facing towards the inside of the car, push that tab in (towards you if you're facing towards the truck) and pull. You shouldn't have to pull too hard onto it to remove it. To disconnect the white FM antenna you need to slide a tab on the connector up, then push that tab inside and pull the plug. Again, you won't have to pull too hard to remove it. To disconnect the black FM antenna you need to pull it out, it's a really long piece so don't worry about pulling out the actual connector inside the tuner. Don't pull on the wires, pull on the black part, you might need to use a flathead to help wedge it out if it's stuck. Now that all the wires are disconnected, you can remove the actual tuner by unscrewing the bolts on the tuner and pulling it like you did with the front headliner trim. Don't worry about holding the tuner while unscrewing it as it's secured into the trim with clips, and make sure not to pull on the thin metal casing, pull on the side that's touching the trim.

 <https://service.tesla.com/docs/Cybertruck/ServiceManual/en-us/GUID-3327A72F-0684-446F-92D1-328283C24128.html>

4. Connect the SXM tuner


To connect FM, connect the white Fakra connector to the single side of the dual to single Fakra splitter and connect the black connector to the FM amplifier, from there connect the dual Fakra connector to the tuner. To connect XM, connect the curly Fakra cable to the curly-colored connector. To connect the tuner to the car, connect the rectangular white plug to the tuner. If the tuner has an orange LED, it's being successfully powered.

5. Reprogram the truck

To connect the truck to the laptop, open the [Tesla Toolbox](#) website on Chrome and connect the OBD2 (truck) to RJ45 (laptop) cord to each device. The first link should give more information. Make sure the laptop still has internet access but routes Tesla related connections to the ethernet network interface. Use the second link for more info if you're confused. If it won't connect to the truck when using the GUI, go to the site settings for the Toolbox website and allow insecure connections. I forgot how to access the gateway configuration; the third link should give some info. Once you're in the gateway config, set the ethernetTunerType to HARMAN_GEN3 and reboot the truck. If it doesn't recognize the tuner in the later steps, set it to the other Harman option. This next part is a little hard to describe as I did a few things while trying to get it to recognize the new tuner. You can restart it through the Tesla Toolbox, steering wheel, or the power off button. Once you restart it, it'll take a few minutes to recognize the new hardware and have the new SiriusXM app popup. Verify that the tuner is working by tuning to an FM station and an XM station. The Radio app should work like normal. To use SiriusXM satellite use the app with the SXM icon, to stream over cellular use the app with the S icon with the star.



<https://service.tesla.com/docs/Cybertruck/ServiceManual/en-us/GUID-6577031D-81C8-4466-9C60-6FB1B4BB3B6F.html>
<https://www.youtube.com/watch?v=5AJZNhn6Zuo>
<https://service.tesla.com/docs/ModelY/ServiceManual/en-us/GUID-0FB23E2E-E673-49A8-B282-04C01D6F3530.html>

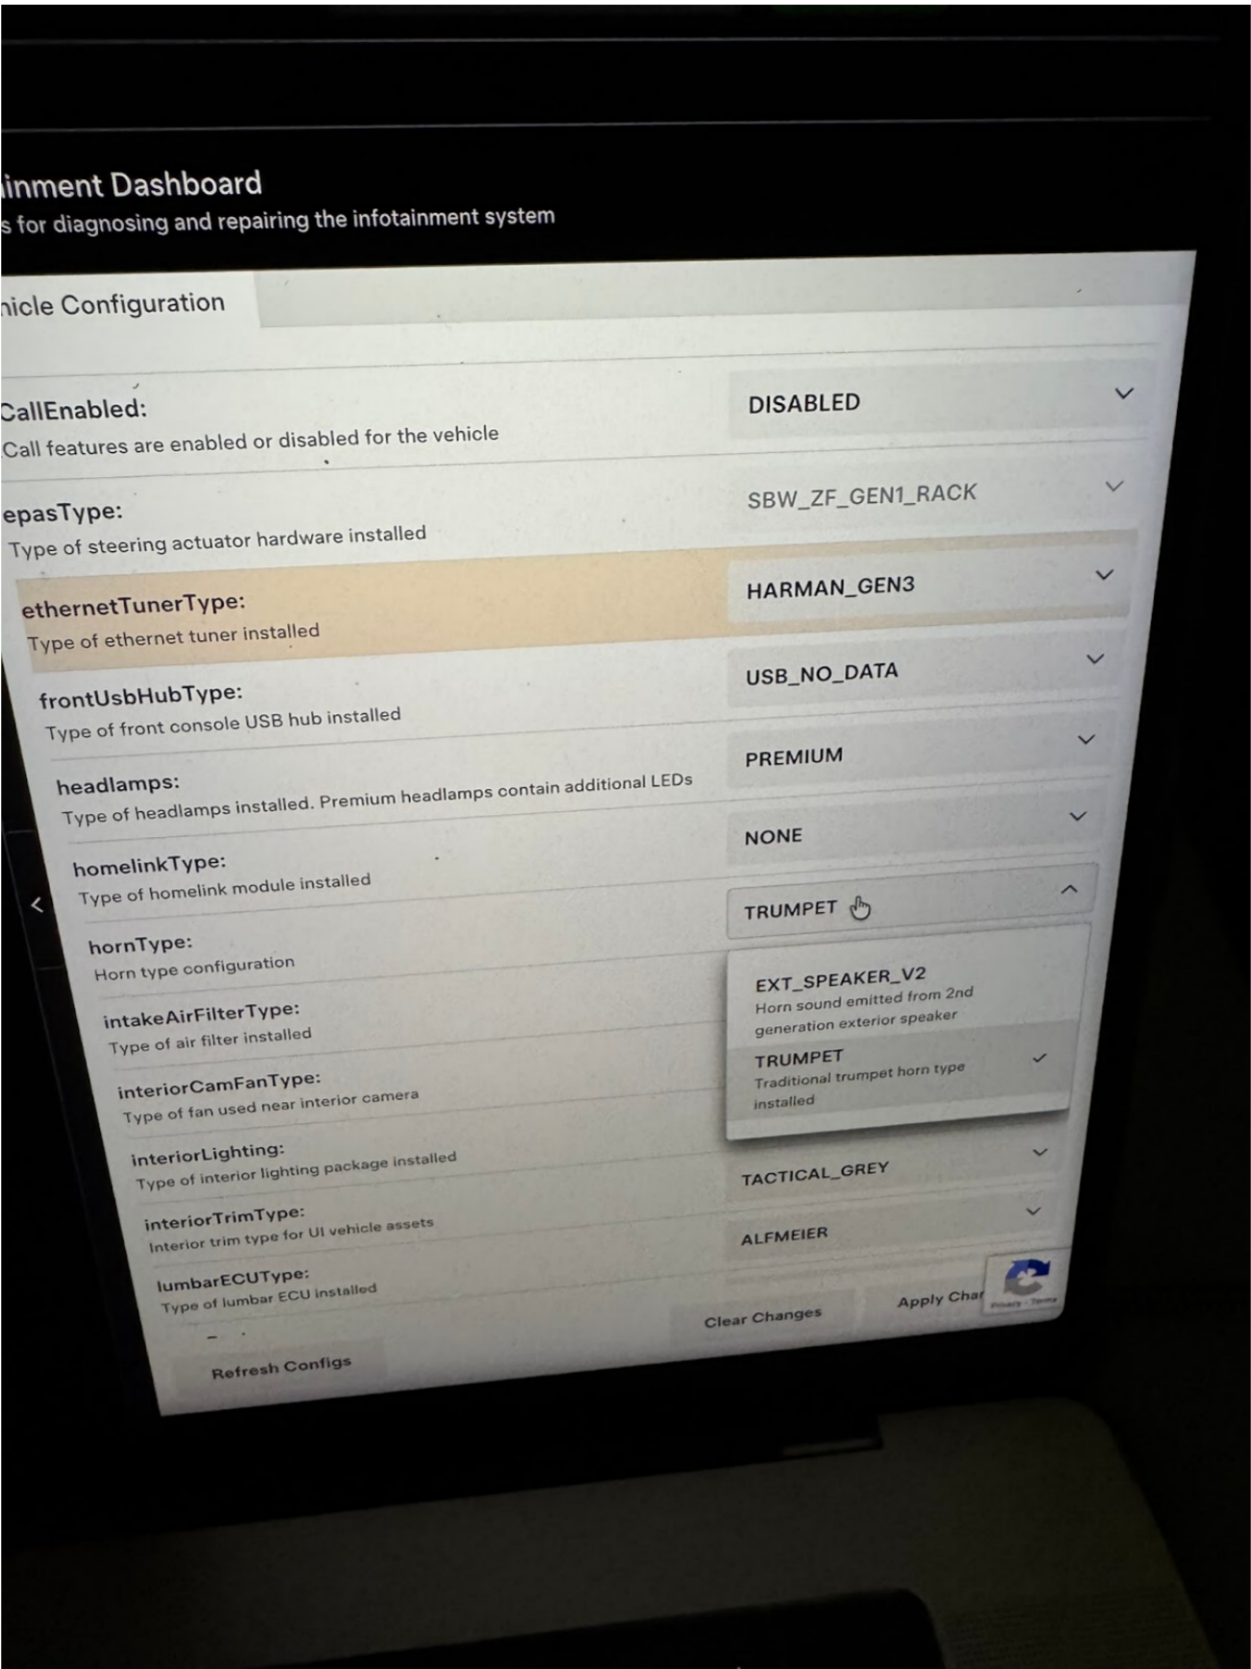

A Photo from Tesla Toolbox Showing the Gateway Config

6. Reinstall the trim

Arrange everything so it fits within the trim. To put the trim back together, push the clips back into place. Some pieces of the trim won't completely reattach, just make sure the majority of the clips are put back together and nothing is sagging. Now you can use SiriusXM like normal.

Credits:

<https://teslamotorsclub.com/tmc/threads/siriusxm-on-model-y.238797/>
<https://teslamotorsclub.com/tmc/threads/factory-oem-siriusxm-nearly-working-in-tesla-2022-model-3.271704/>
<https://teslatap.com/modifications/fm-xm-radio-for-the-mcu2-upgrade/>
<https://www.deedni.com/tesla-model-3-integrated-siriusxm-satellite-radio/>